

Moku:Pro

Specifications



Table of Contents

Moku:Pro Hardware	4
Specifications.....	4
Analog I/O.....	4
Clock reference.....	5
General characteristics.....	5
General connectivity.....	6
Hardware measurements.....	7
ADC input noise.....	7
ADC crosstalk.....	8
Moku:Pro's Arbitrary Waveform Generator	10
Description.....	10
Specifications.....	11
Common.....	11
Waveform.....	12
Moku:Pro's Frequency Response Analyzer	13
Description.....	13
Specifications.....	14
Source.....	14
Input.....	14
Measurement.....	15
Saving Data.....	15
Moku:Pro's Data Logger	16
Description.....	16
Specifications.....	17
Input.....	17
Logging.....	17
Moku:Pro's Lock-In Amplifier	18
Description.....	18
Specifications.....	19
Signal channel.....	19
External reference.....	19
Internal reference.....	20
Demodulator.....	20
Signal output.....	20
Saving data.....	21
Moku:Pro's Oscilloscope	22
Description.....	22
Specifications.....	23
Vertical characteristics.....	23
Horizontal characteristics.....	23

Trigger.....	24
Measurements.....	24
Integrated waveform synthesizer.....	25
Moku:Pro's Phasemeter	26
Description	26
Specifications.....	27
Inputs.....	27
Measurement.....	27
Saving Data	28
Synthesizer.....	28
Moku:Pro's PID Controller	29
Description	29
Specifications.....	30
Inputs.....	30
Controller.....	30
Moku:Pro's Spectrum Analyzer	31
Description	31
Specifications.....	32
Frequency.....	32
Amplitude.....	32
Synthesizer.....	33
Moku:Pro's Waveform Generator	34
Description	34
Common characteristics.....	35
Waveform characteristics.....	35
Modulation.....	36

Moku:Pro Hardware

Specifications

Analog I/O

Analog inputs

Channels	4
Bandwidth (-3 dB)	300 MHz / 600 MHz switchable
Sampling rate	5 GSa/s with 1 channel, 2.5 GSa/s with 2 channels, and 1.25 GSa/s with 4 channels.
Resolution	10 bits (high bandwidth) / 18 bits (low bandwidth)
Maximum voltage range	40 V _{pp} into 50 Ω ¹
Input impedance	50 Ω / 1 MΩ
Input coupling	AC / DC
AC coupling corner (-3 dB)	16 kHz into 50 Ω 1.6 Hz into 1 MΩ
Input referred noise	30 nV/√Hz @ 100 Hz
Connector	BNC

Analog outputs

Channels	4
Bandwidth (maximum output frequency)	500 MHz (2 V _{pp} into 50 Ω), 100 MHz (10 V _{pp} into 50 Ω)
Sampling rate	1.25 GSa/s per channel
Resolution	16-bit
Voltage range	10 V _{pp} into 50 Ω
Output impedance	50 Ω
Output coupling	DC
Connector	BNC

¹ 50 Ω frontend impedance can only support up to 5.5 V_{rms} input voltage, signals over this voltage are only allowed in 1 MΩ mode.

Clock reference

On-board clock

Frequency	10 MHz
Stability	< 300 ppb

10 MHz reference input

Expected waveforms	Sine / square
Frequency	10 MHz \pm 20 kHz
Input range	-6 dBm to +10 dBm
Connector	BNC

10 MHz reference output

Waveform type	Square
Output frequency	10 MHz
Output level	1.4 V _{PP}
Connector	BNC

General characteristics

General and environmental characteristics

Power consumption	100 W typical 115 W when charging USB
Power voltage range	100 to 240 V, 50/60 Hz
Temperature	Operating: 0 to +45 °C Non-operating: -10 to +60 °C

Electromagnetic compliance




Physical characteristics

Dimensions	Width: 44 cm (17.30 in.) Depth: 33 cm (13.00 in.) Height: 7 cm (2.80 in.)
Weight	6.7 kg (14.77 lbs)
Security	Kensington lock compatible

General connectivity

Connectivity

Analog inputs	4 x BNC
Analog outputs	4 x BNC
Network	Ethernet (10/100/1000 Base-T) Wi-Fi 802.11 b/g/n
USB data port	Type-C // For connecting the iPad to the Moku:Pro via USB
External trigger input	BNC
10 MHz clock reference input	BNC
10 MHz clock reference output	BNC

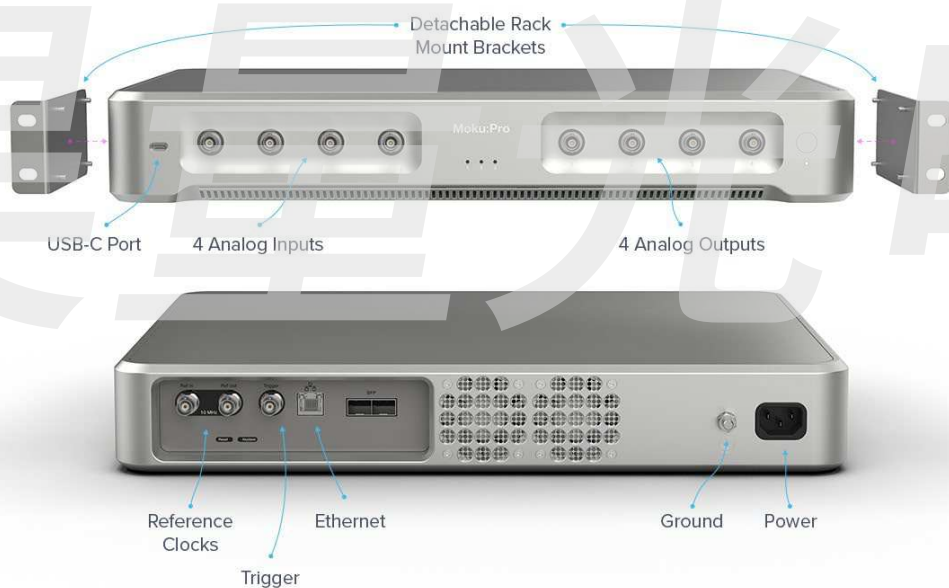


Hardware measurements

ADC input noise





1 M Ω // DC coupled // 0 dB attenuation





Acquisition mode: Precision // Sampling rate: 2.5 MSa/s

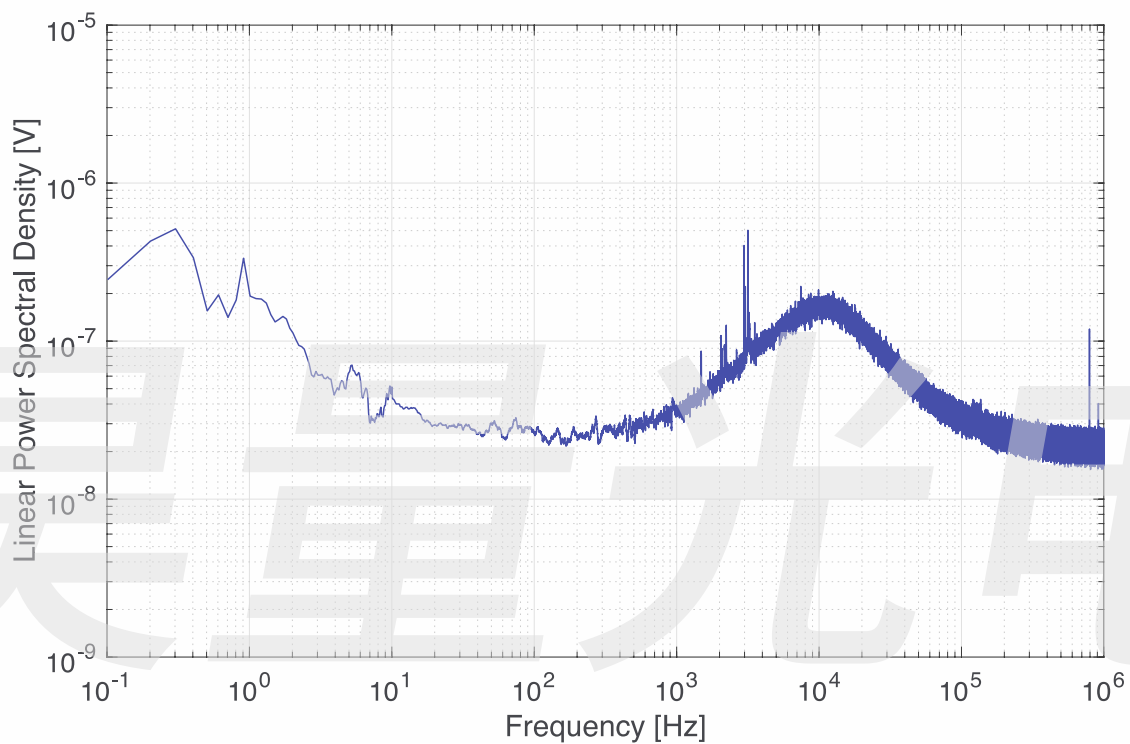

ADC crosstalk

50 Ω // DC coupled // 0 dB attenuation

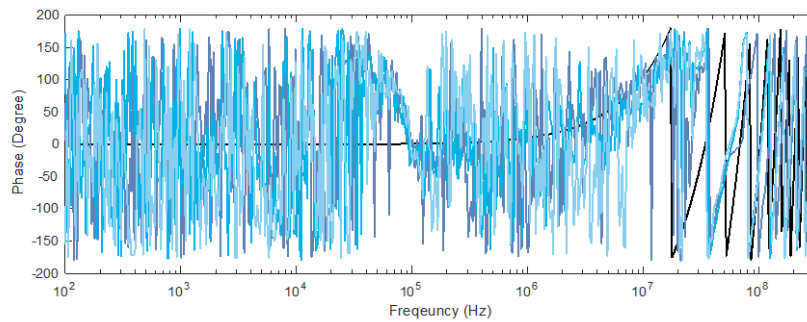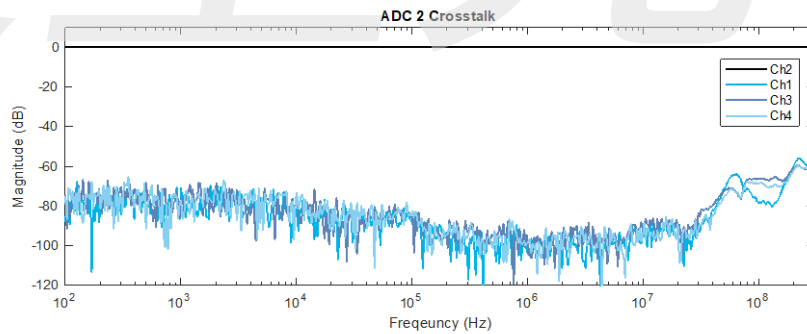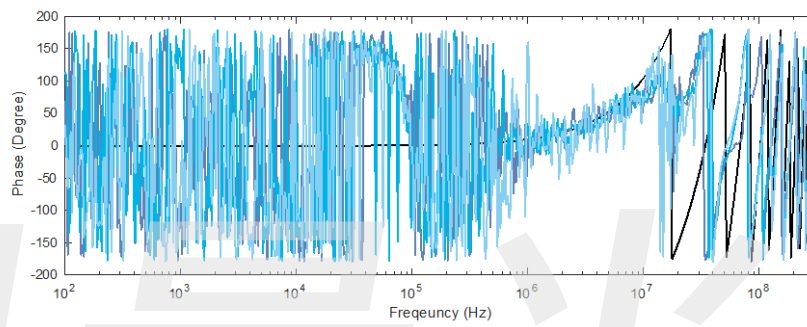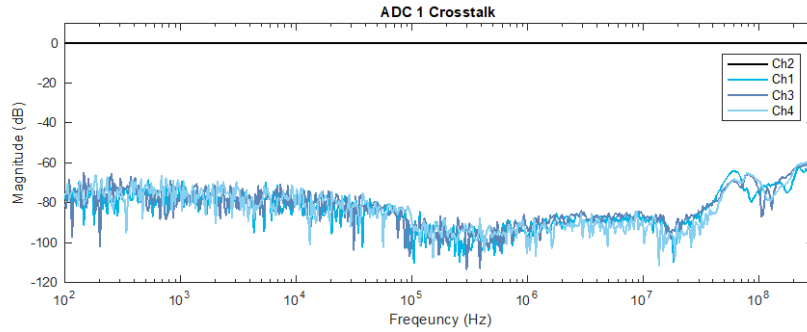

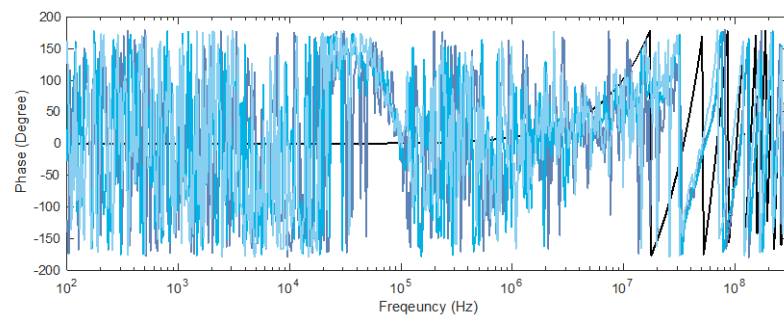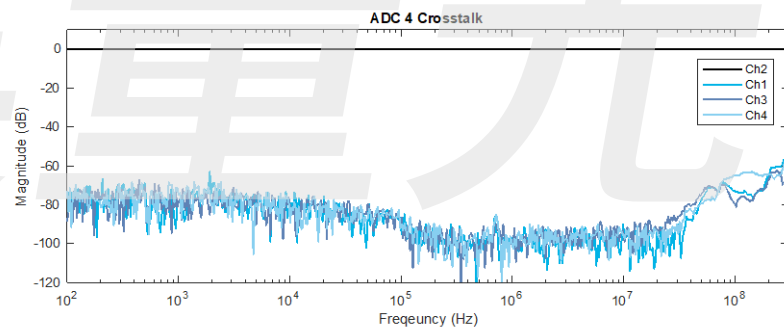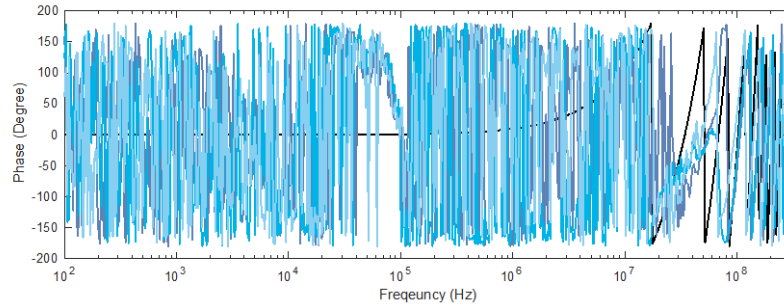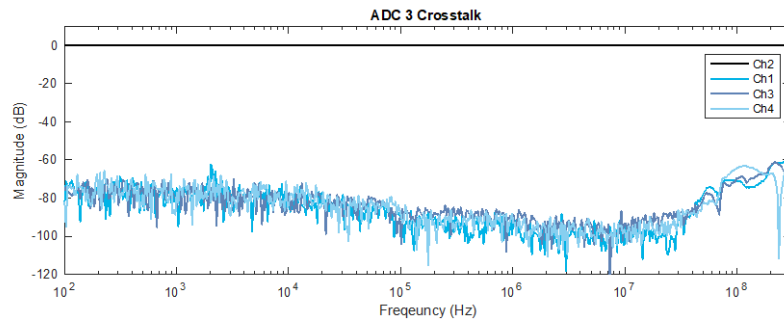


昊量光电



Moku:Pro's Arbitrary Waveform Generator

Description

Moku:Pro's 4 channel Arbitrary Waveform Generator can generate 4 custom waveforms with up to 65,536 points and sample rates ranging from 312.5 MSa/s to 1.25 GSa/s. Waveforms can be loaded from a file or input as a piece-wise mathematical function with up to 32 segments, enabling you to generate truly arbitrary waveforms. In burst mode, waveform generation can be triggered from input channels with start or n cycle modes. In pulsed mode, waveforms can be output with more than 250,000 cycles of dead time between pulses.

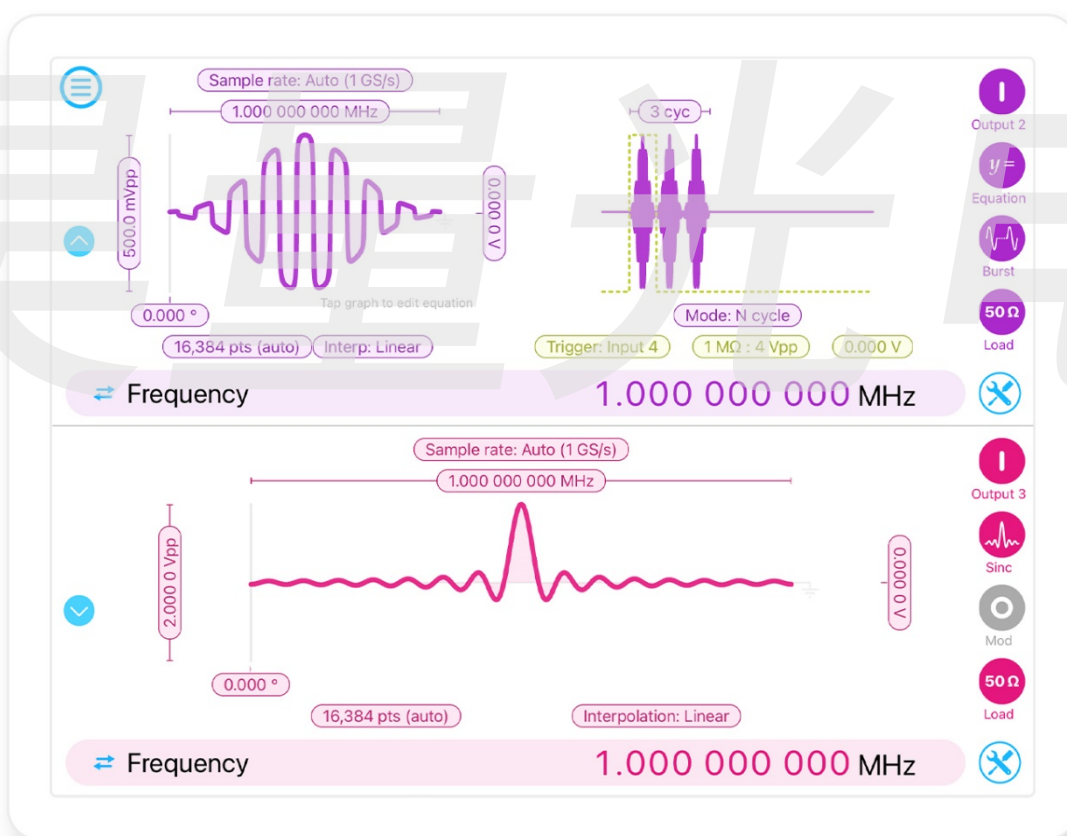

Features

- Four independent AWG channels with up to 500 MHz bandwidth
- Choose between pre-set waveforms, load points from a file, or input an equation directly
- Phase synchronization output between the four channels
- Configure pulsed output with up to 250,000 cycles of dead time between pulses



Specifications

Common

Overview

Channels	4
Sampling rate	312.5 MSa/s, 625 MSa/s, 1.25 GSa/s
Source impedance	50 Ω
Output load	50 Ω / 1 M Ω
Waveforms	Sine, Gaussian, Exponential Fall, Exponential Rise, Sinc, Equation, Custom (from file)

Amplitude

Output voltage range	2 V _{pp} @ 625 MSa/s and 1.25 GSa/s 10 V _{pp} @ 312.5 MSa/s
Resolution	100 μ V

DC offset

Range (peak AC + DC)	± 10 V into 50 Ω ± 20 V into high-impedance
Resolution	100 μ V

Phase offset

Range	0° to 360°
Resolution	0.001°



Waveform

Custom

Maximum output rate	312.5 MSa/s	65,536 points
	625 MSa/s	32,768 points
	1.25 GSa/s	16,384 points
Text file type	Clipboard, My Files	
File import options	None, Linear	
Interpolation	2 ns	
Minimum edge time	$\leq 10\%$ for edge times between 4 ns and 8 ns	
	$\leq 2\%$ for edge times greater than 8 ns	
Period range	4 ns to 1 ks	


昊量光电



Moku:Pro's Frequency Response Analyzer

Description

Moku:Pro's Frequency Response Analyzer enables you to measure the frequency response of a system in both magnitude and phase using a swept sine output from 10 mHz to 300 MHz. It has a noise floor of -135 dBm across the entire frequency range. Moku:Pro is equipped with four inputs and outputs ports, enabling differential or ratiometric measurements. Select from between 32 and 512 points per sweep and configure settling and averaging times to balance total sweep duration and signal-to-noise ratio.

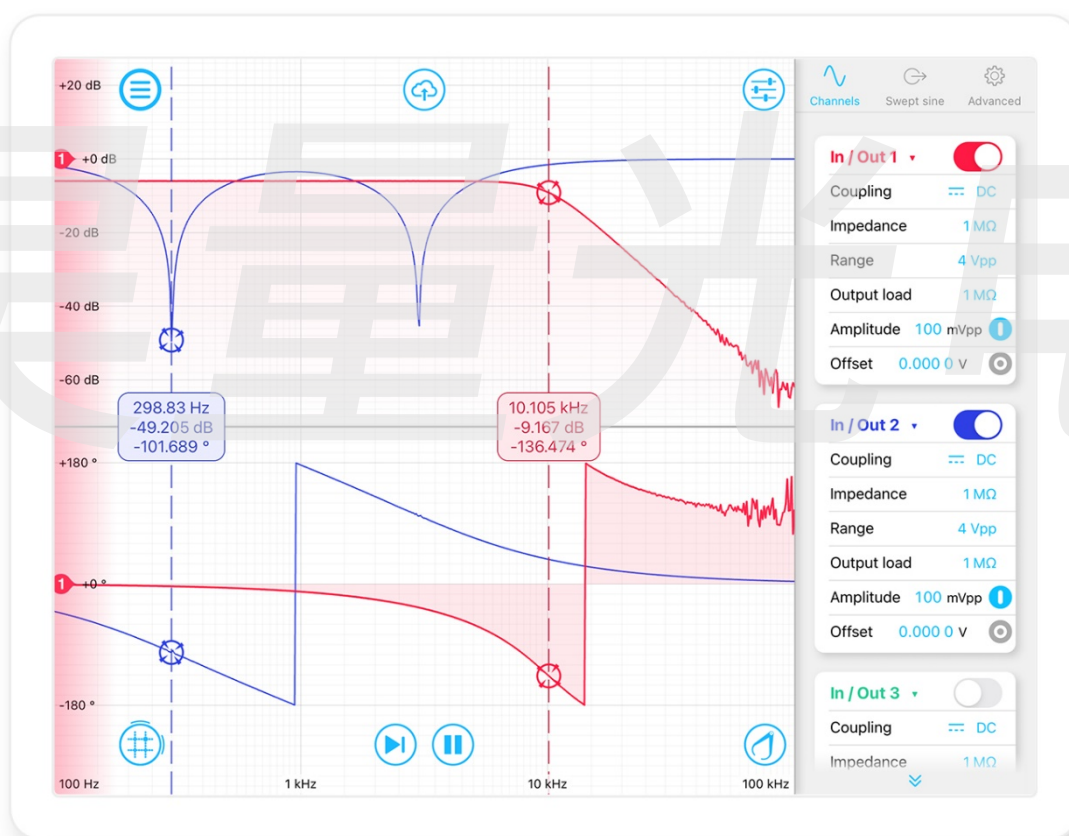

Features

- Linear or logarithmic swept sine output.
- Math channel to add, subtract, multiply or divide response functions as they are acquired.
- Measure key metrics with cursors and markers.
- Configurable measurement averaging and settling times
- Demodulate up to 15th harmonic



Specifications

Source

Source

Waveform	Sine
Frequency range	10 mHz to 300 MHz
Sweep type	Linear / Logarithmic
Sweep points	32, 64, 128, 256, 512
Output amplitude range	± 0.5 mV to ± 10 V into 50 Ω
Output load	50 Ω / 1 M Ω
Source impedance	50 Ω

Input

Input characteristics

Input impedance	50 Ω / 1 M Ω
Input coupling	AC / DC
Input attenuation	0 dB / 20 dB / 40 dB
Input voltage range	0.4 V _{pp} into 50 Ω with 0 dB attenuation 4 V _{pp} into 50 Ω with 20 dB attenuation 40 V _{pp} into 50 Ω with 40 dB attenuation
Input noise	30 nV/ $\sqrt{\text{Hz}}$ @ 100 Hz
Crosstalk	< 60 dB



Measurement

Measurement characteristics

Settling time	Min.	Greater of 1 μ s or 1 cycle
	Max.	10.0 seconds
Averaging time	Min.	Greater of 1 μ s or 1 cycle
	Max.	10.0 seconds
Calibration	Calibrates magnitude and phase using a reference sweep ²	
Calibrated gain error	<0.05 dB	
Calibrated phase error	< 0.5°	

Saving Data

Saving data

File formats	Plain text: records data using a standard *.csv format
	Binary: records data using MathWorks' *.mat format which can be opened using MATLAB
Export modes	Dropbox, E-mail and iCloud, My Files (iOS 11)

昊量光电


² The calibration feature can be used to isolate the magnitude and phase response of the system under test by compensating for deviations in magnitude and phase caused by delays (e.g., caused by cables) and the frequency response of the Moku:Pro's analog frontend.



Moku:Pro's Data Logger

Description

Moku:Pro's Data Logger enables you to log data to its 120 GB internal solid-state drive with sampling rates of up to 10 MSa/s. Four inputs are equipped with dual 10-bit and 18-bit ADCs. With blended ADC technology, input noise is down to 30 nV $\sqrt{\text{Hz}}$ at 100 Hz, providing ultra-low noise data logging from acoustic to RF frequencies. Moku:Pro is also equipped with a 10 MHz clock synchronization I/O, and four 500 MHz outputs, allowing flexible integration with other electronics.

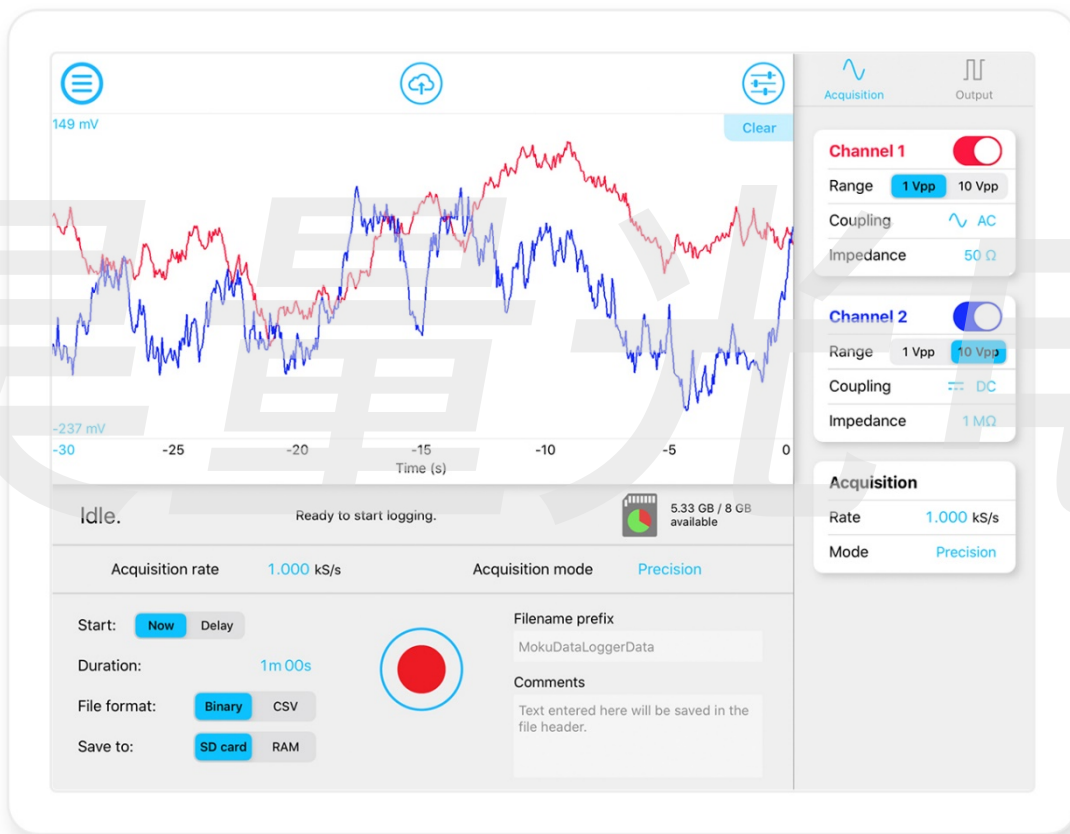

Features

- Log voltage data on four independent channels to its 120 GB SSD.
- Built-in four-channel 500 MHz waveform generator.
- 10 MHz clock synchronization ports.
- Easily export data to computer, Dropbox, and other cloud-based services.
- Schedule your log to start with a delay of up to 10 days.



Specifications

Input

Voltage

Input voltage range	0.4 V _{pp} into 50 Ω with 0 dB attenuation 4 V _{pp} into 50 Ω with 20 dB attenuation 40 V _{pp} into 50 Ω with 40 dB attenuation
Input impedance	50 Ω / 1 MΩ
Input coupling	AC / DC

Logging

Acquisition


File formats	Binary: records data using a proprietary *.li format for high-speed data logging. Note: data saved using the *.li format must be converted to plain text using the LI file converter available here: https://github.com/liquidinstruments/lireader
Export modes	Dropbox, E-mail and iCloud, My Files (iOS 11)
Maximum sampling rate	10 MSa/s for 1 channel 5 MSa/s for 2 channels 2.5 MSa/s for 4 channels
Delayed log start time	Up to 240 hours
Log duration	1 second up to 240 hours



Moku:Pro's Lock-In Amplifier

Description

Moku:Pro's digital Lock-in Amplifier supports dual-phase demodulation (XY/R θ) from 1 mHz to 600 MHz with more than 120 dB dynamic reserve. A PID controller can be placed after the demodulation stage for phase-locked loop applications. It also features an integrated 4-channel oscilloscope and data logger, enabling you to observe signals at up to 1.25 GSa/s and log data at up to 1 MSa/s.

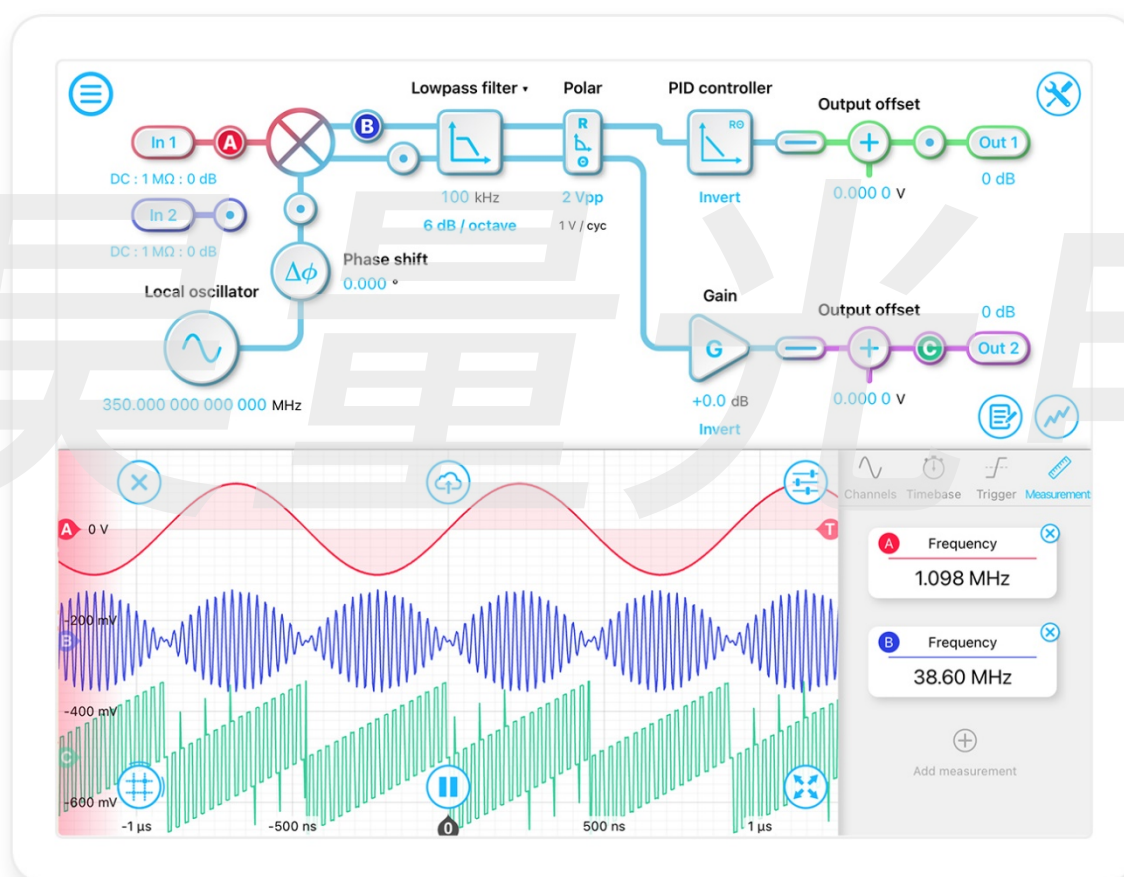

Features

- Measure signals obscured by noise with more than 120 dB dynamic reserve
- Block diagram view of the digital signal processing chain
- Built-in probe points for signal monitoring and data logging
- Internal or external demodulation modes including a PLL (phase-locked loop)
- Toggle between rectangular (X/Y mode) or polar coordinates (R/Theta mode)
- Built-in PID Controller



Specifications

Signal channel

Signal input

Input coupling	AC / DC
Input impedance	50 Ω / 1 M Ω
AC coupling corner (-3 dB)	16 kHz into 50 Ω 1.6 Hz into 1 M Ω
Frequency range	DC to 600 MHz
Input attenuation	0 dB / 20 dB / 40 dB
Input range	0.4 V _{pp} with 0 dB input attenuation 4 V _{pp} with 20 dB input attenuation 40 V _{pp} with 40 dB input attenuation
Input noise	< 30 nV/ $\sqrt{\text{Hz}}$ above 10 Hz at 400 mV _{pp} input range < 200 nV/ $\sqrt{\text{Hz}}$ above 1 kHz at 400 mV _{pp} input range < 20 nV/ $\sqrt{\text{Hz}}$ above 100 kHz at 400 V _{pp} input range

External reference

Reference input

Input coupling	AC / DC
Input impedance	50 Ω / 1 M Ω
Frequency range	DC to 600 MHz
Input attenuation	0 dB / 20 dB / 40 dB
External reference modes	Direct, phase-locked
Direct demodulation	$X = R\cos\theta$

Phase-locked loop

PLL frequency range	1 MHz to 600 MHz
PLL tracking bandwidth	10 kHz, 2.5 kHz, 600 Hz, 150 Hz, 40 Hz, 10 Hz
Phase range	0 to 360°
Phase resolution	0.001°
Demodulation	XY / R θ



Internal reference

Internal reference waveforms

Waveform	Sine
Frequency range	1 mHz to 400 MHz
Frequency resolution	1 μ Hz
Phase range	0 to 360°
Phase resolution	0.001°
Demodulation	XY / R θ

Internal reference auxiliary output

Amplitude range	1 mV _{pp} to 10 V _{pp} into 50 Ω
Amplitude resolution	1 mV
Offset range	± 1 V
Output limit (AC + DC)	± 1 V with 0 dB ± 5 V with 14 dB
Amplitude accuracy	1%
Output impedance	50 Ω
Can be phase-locked to external 10 MHz timebase?	Yes

Demodulator

Demodulator characteristics

Sources	Internal reference oscillator, external direct, external with phase-locked loop
Types	Internal: XY / R θ External direct: X = Rcos θ External with PLL: XY / R θ
Filter mode	Low-pass filter
Filter cut-off frequency (-3dB)	700 mHz to 12.4 MHz
Filter time-constant	12.8 nanoseconds to 0.215 seconds
Filter slope	6, 12, 18, 24 dB per octave
Phase shift precision	0.001°
Dynamic reserve	> 120 dB

Signal output

Output characteristics

Modes	XY (cartesian mode); R θ (polar mode); Auxiliary Oscillator
Number of output channels	2
Channel 1 output	X/R
Channel 2 output	Y/ θ , auxiliary oscillator, or local oscillator



Output characteristics

Output gain mode	Direct, PID ³
Gain range (direct)	-80 dB to 160 dB
Phase scale (Rθ mode)	1 V/cycle
Output voltage offset	± 1 V into 50 Ω
Output voltage range (AC + DC)	± 10 V into 50 Ω
Output impedance	50 Ω
D/A conversion	16-bits, 1.25 GSa/s, 500 MHz analog bandwidth

PID controller

Controller frequency range	100 mHz to 40 MHz
Proportional gain	± 120 dB (XY mode), ± 60 dB (Rθ mode)
Integrator crossover frequency	3.125 Hz to 312.5 kHz
Int. saturation crossover frequency	3.125 Hz to 312.5 kHz
Integrator gain range	Proportional gain to +120 dB (XY mode), +60 dB (Rθ mode)
Differentiator crossover frequency	31.25 Hz to 3.125 MHz
Diff. saturation crossover frequency	31.25 Hz to 3.125 MHz
Differentiator gain range	Proportional gain to +120 dB (XY mode), +60 dB (Rθ mode)

Saving data

Saving data

File formats	Binary: records data using a proprietary LI format. Note: data saved using the LI format must be converted to plain text using the LI file converter available here: https://www.liquidinstruments.com/utilities
Maximum sampling rate	1 MSa/s for 1 channel 500 kSa/s for 2+ channels
Export modes	Dropbox, E-mail and iCloud, My Files (iOS 11 or later)
Delayed log start time	Up to 240 hours
Log duration	1 second up to 240 hours


³ Only one output may have a PID controller enabled at a time



Moku:Pro's Oscilloscope

Description

Moku:Pro's Oscilloscope features four highspeed, ultra-low noise input channels with 600 MHz analog bandwidth. An innovative blended ADC technology combines the information from 10 bit and 18 bit ADCs to cover a broad spectrum, providing class-leading input noise performance at $30\text{nV}/\sqrt{\text{Hz}}$ @ 100Hz with large dynamic range. The built-in four-channel waveform generators are capable of producing waveforms with a bandwidth of up to 500 MHz.

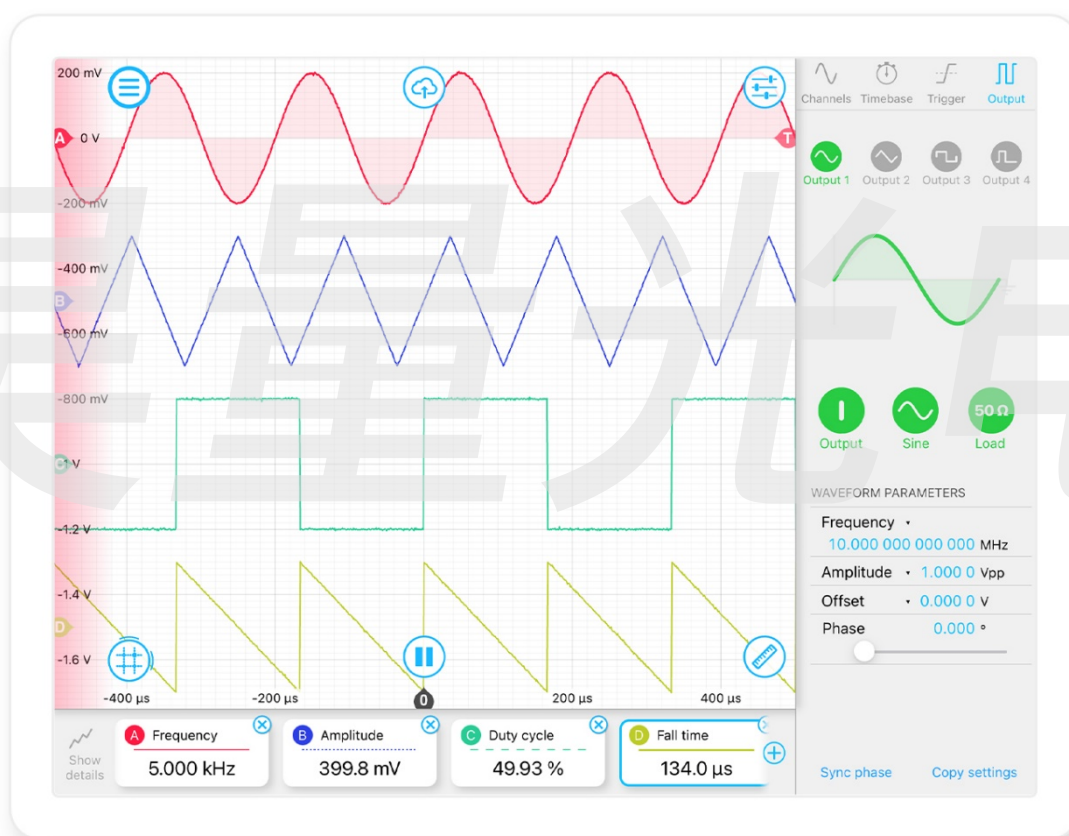

Features

- Four analog inputs with 600 MHz bandwidth.
- Exceptional low-frequency noise performance: $30\text{ nV}/\sqrt{\text{Hz}}$ @ 100 Hz
- Dual-ADC design with blended ADC technology
- Ultra stable 0.3 ppm onboard oscillator with 10 MHz synchronization in and out
- Integrated high-speed waveform generator channels with analog bandwidths up to 500 MHz



Specifications

Vertical characteristics

Voltage

Channels	4
Input coupling	AC / DC
Input impedance	50 Ω / 1 M Ω
Input bandwidth (-3 dB)	300 MHz / 600 MHz switchable
Input voltage range	40 V _{pp}
Input voltage noise	< 30 nV/ $\sqrt{\text{Hz}}$ above 10 Hz at 400 mV _{pp} input range < 200 nV/ $\sqrt{\text{Hz}}$ above 1 kHz at 400 mV _{pp} input range < 20 nV/ $\sqrt{\text{Hz}}$ above 100 kHz at 400 V _{pp} input range
Channel-to-channel isolation	> 40 dB

Horizontal characteristics

Time

Time mode	Normal, Roll
Horizontal span	4 ns to 200 s

Acquisition

Acquisition mode	Normal, Precision ⁴
Maximum sampling rate	5 GSa/s
Averaging (linear)	Off, 2 to 100 waveforms
Persistence	Off, 100 ms to 10 s, infinite
Interpolation	Linear, SinX/X, Gaussian

⁴ Precision mode samples the waveform at the full rate and applies a finite impulse response (FIR) low-pass filter to attenuate noise above the usable bandwidth of the measurement sampling rate and prevent aliasing.



Trigger

Trigger

Trigger modes	Auto:	Triggers automatically after timeout (1 second if previously triggered, 0.05 seconds otherwise)
	Normal:	Triggers only on trigger event
	Single:	Triggers once on a trigger event. Press the 'play' button to re-trigger
Trigger sources	Input 1, Input 2, Input 3, Input 4, Output 1, Output 2, Output 3, Output 4, External	
Nth event	Trigger on the 1 st to 65,535 th event	
Holdoff	10 femtosecond to 10 seconds	
Trigger types	Edge:	Rising edge, falling edge, both edges
	Pulse:	Positive / negative polarity <ul style="list-style-type: none"> 10.0 seconds > pulse width > 3.2 nanoseconds

Trigger sensitivity

Sensitivity modes	Auto:	Automatically configures trigger sensitivity based on horizontal and vertical scales Select <i>Noise Reject</i> or high-frequency <i>HF Reject</i> options
	Manual:	Manually configure trigger sensitivity
Manual modes	Relative, Absolute	
Hysteresis	Relative:	0.01 div to 5.00 div
	Absolute:	100 μ V to 1.00 V

Measurements

Measurements

Time measurements	Frequency, period, duty cycle, positive pulse width, negative pulse width, rise time, fall time, rise rate, fall rate
Amplitude measurements	Peak-to-peak, amplitude, maximum, minimum, mean, cycle mean, RMS, cycle RMS, standard deviation, high-level, low-level, overshoot, undershoot
Math	Add, subtract, multiply, divide, XY mode, integrate, differentiate, FFT, min hold, max hold, arbitrary equation mode (using equation editor)
Visualisations	Histogram, time trend



Cursors

Maximum voltage cursors	5 per channel
Maximum time cursors	5 per channel
Voltage cursor options	Manual, track mean, track maximum, track minimum, maximum hold, minimum hold
User defined reference	A single cursor can be set as a reference for differential measurements using all other active cursors

Integrated waveform synthesizer

Synthesizer

Channels	4
Output impedance	50 Ω
Waveforms ⁵	Sine, Square, Ramp, Pulse, DC
Output frequency range	1 mHz to 500 MHz
Output voltage range	± 5 V into 50 Ω

昊量光电


⁵ Modulation not available for waveforms synthesized using the oscilloscope instrument.



Moku:Pro's Phasemeter

Description

Moku:Pro's Phasemeter measures phase (relative to a reference clock) of up to four input signals with better than 6 μ radian precision from 1 kHz up to 300 MHz. Based on a digitally implemented phase-locked loop architecture, Moku:Pro's Phasemeter provides exceptional dynamic range, zero deadtime, and measurement precision that exceeds the performance of conventional lock-in amplifiers and frequency counters.

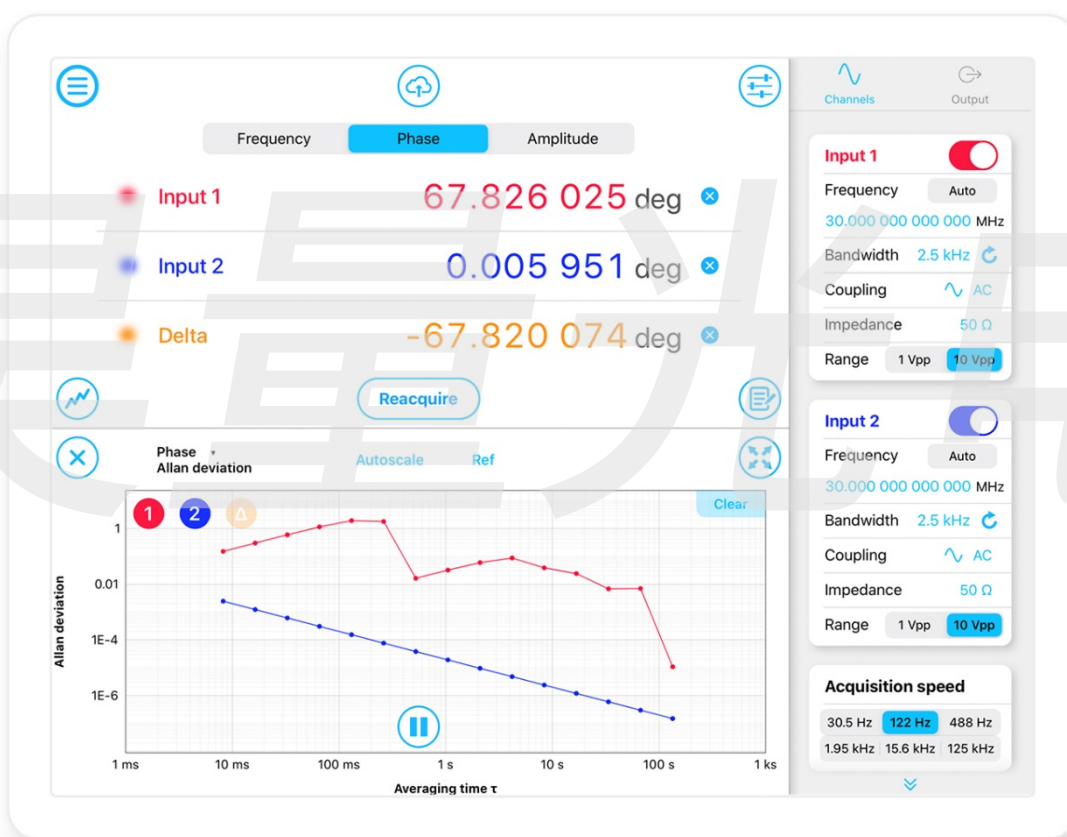

Features

- Four independent phasemeter channels with output options that track and record the phase, frequency, and amplitude of two independent signals.
- Phase-locked output option enables you to generate sine waves that are phase locked to the inputs.
- Observe measurement data in the frequency domain using the Phasemeter's integrated spectral analysis toolkit.
- Phase-locked loop tracking bandwidths from 10 Hz up to 10 kHz.



Specifications

Inputs

Input characteristics

Input frequency range	1 kHz to 300 MHz
Input voltage range	0.4 V _{pp} with 0 dB input attenuation 4 V _{pp} with 20 dB input attenuation 40 V _{pp} with 40 dB input attenuation
Input impedance	50 Ω / 1 MΩ
Input coupling	AC / DC

Measurement

Measurement characteristics

Frequency set-point precision	1 μHz
Modes of operation	Auto-acquire Automatically determines input frequency for signals above 1 MHz
	Manual Initializes the phasemeter to a specific frequency
Tracking bandwidth	10 Hz / 40 Hz / 150 Hz / 600 Hz / 2.5 kHz / 10 kHz (user selectable)

Data visualisation

Visualisations	Timeseries, Power Spectral Density, Amplitude Spectral Density, Coherence, Rayleigh Spectrum, Allan Deviation
----------------	---



Saving Data

Saving data

Logging rates	30 Sa/s, 120 Sa/s, 477 Sa/s, 1.9 kSa/s, 15.3 kSa/s, 122 kSa/s
File format	Binary: records data using a proprietary LI format for high-speed data logging. Note: data saved using the LI format must be converted to plain text using the LI file converter available here: https://github.com/liquidinstruments/lireader
Export modes	Dropbox, E-mail and iCloud, My Files (iOS 11)
Delayed log start time	Up to 240 hours
Log duration	1 second up to 240 hours

Synthesizer

Synthesizer⁶

Channels	4
Output impedance	50 Ω
Waveform shape	Sine
Output modes	Manual, phase-locked to input signal
Sampling rate	1.25 GSa/s per channel
Voltage range	± 10 V into 50 Ω


⁶ Where not stated, the phasemeter's synthesizer specifications match those of the Moku:WaveformGenerator instrument.



Moku:Pro's PID Controller

Description

Moku:Pro's PID Controller features four fully configurable PID controllers with sub-microsecond latency. This enables them to be used in applications requiring both low and high feedback bandwidths such as laser temperature and current stabilization. The PID Controller can also be used as a lead-lag compensator by saturating the integral and differential controllers with independent gain settings.

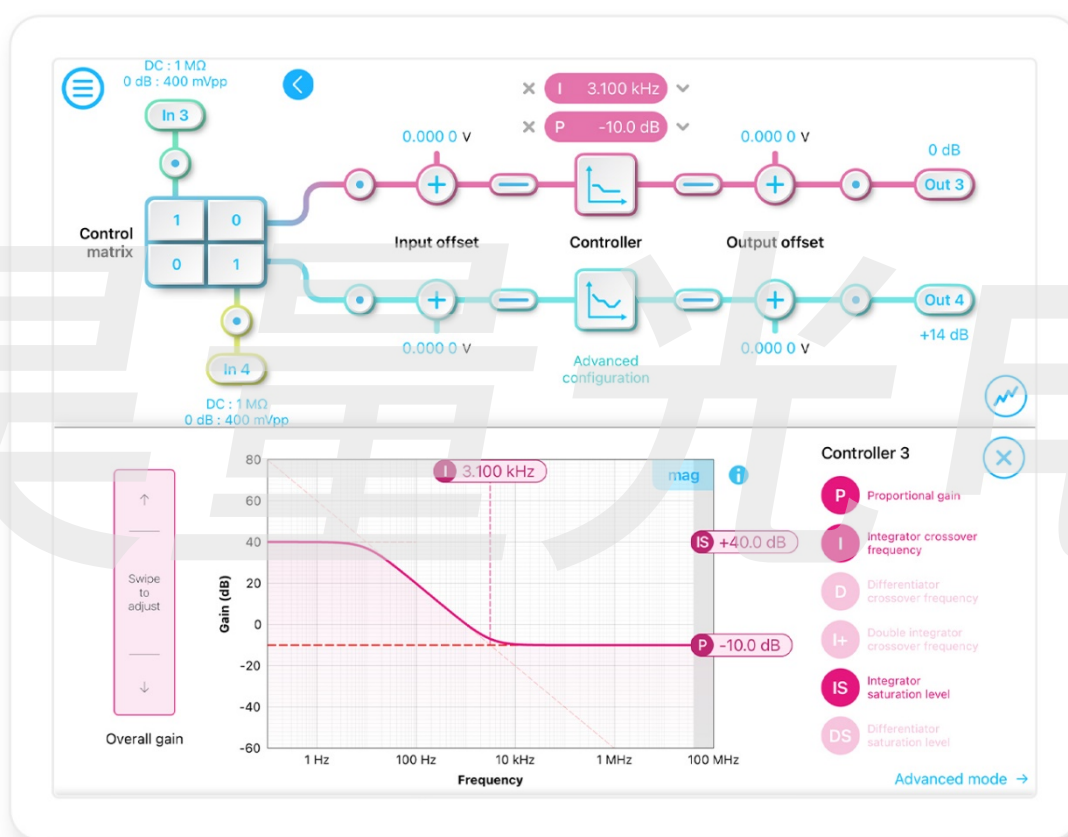

Features

- 4 input channels, 4 output channels, and 4 independent PID controllers with control matrix for MIMO
- Design your control system's frequency response using the interactive Bode plot in realtime
- Block diagram view of the digital signal processing with built-in probe points in signal processing chain
- Advanced multi-section PID builder with single or double integrators and differentiators with low- and high-frequency gain saturation
- Integrated gain probe points for signal monitoring



Specifications

Inputs

Input characteristics

Channels	4
Input control matrix coefficients (linear gain)	-20 to +20
Input impedance	50 Ω / 1 M Ω
Input coupling	AC / DC
Input attenuation	0 dB / 20 dB / 40 dB
Input voltage range	0.4 V _{pp} into 50 Ω with 0 dB attenuation 4 V _{pp} into 50 Ω with 20 dB attenuation 40 V _{pp} into 50 Ω with 40 dB attenuation

Controller

General characteristics

Gain profiles	Proportional (P), integral (I), differential (D), double-integral (I+), integral saturation (IS), differential saturation (DS)
Maximum bandwidth	150 kHz with a phase delay of 30°
Input / output offset range	± 1 V
Offset precision	100 μ V

Gain characteristics


Gain profiles	Proportional (P), integral (I), differential (D), double-integral (I+), integral saturation (IS), differential saturation (DS)
Controller frequency range	DC to 40 MHz
Input / output offset range	± 1 V
Offset precision	100 μ V
Proportional gain	± 60 dB
Integrator crossover frequency	3.125 Hz to 312.5 kHz
Double integrator crossover frequency	3.125 Hz to integrator crossover frequency
Integral saturation level	Between proportional gain and +60 dB The integrator saturation crossover frequency cannot be lower than 3.125 Hz
Differentiator crossover frequency	31.25 Hz to 3.125 MHz
Differentiator saturation level	Between proportional gain and +60 dB The differentiator saturation crossover frequency cannot be higher than 3.1 MHz



Moku:Pro's Spectrum Analyzer

Description

Moku:Pro's Spectrum Analyzer allows you to observe input signals in the frequency domain between DC and 300 MHz with an ultra-low noise floor. View four channels simultaneously with a resolution bandwidth as low as 2.2 Hz and a minimum span of 100 Hz. The Spectrum Analyzer also features four 500 MHz sinewave generators.

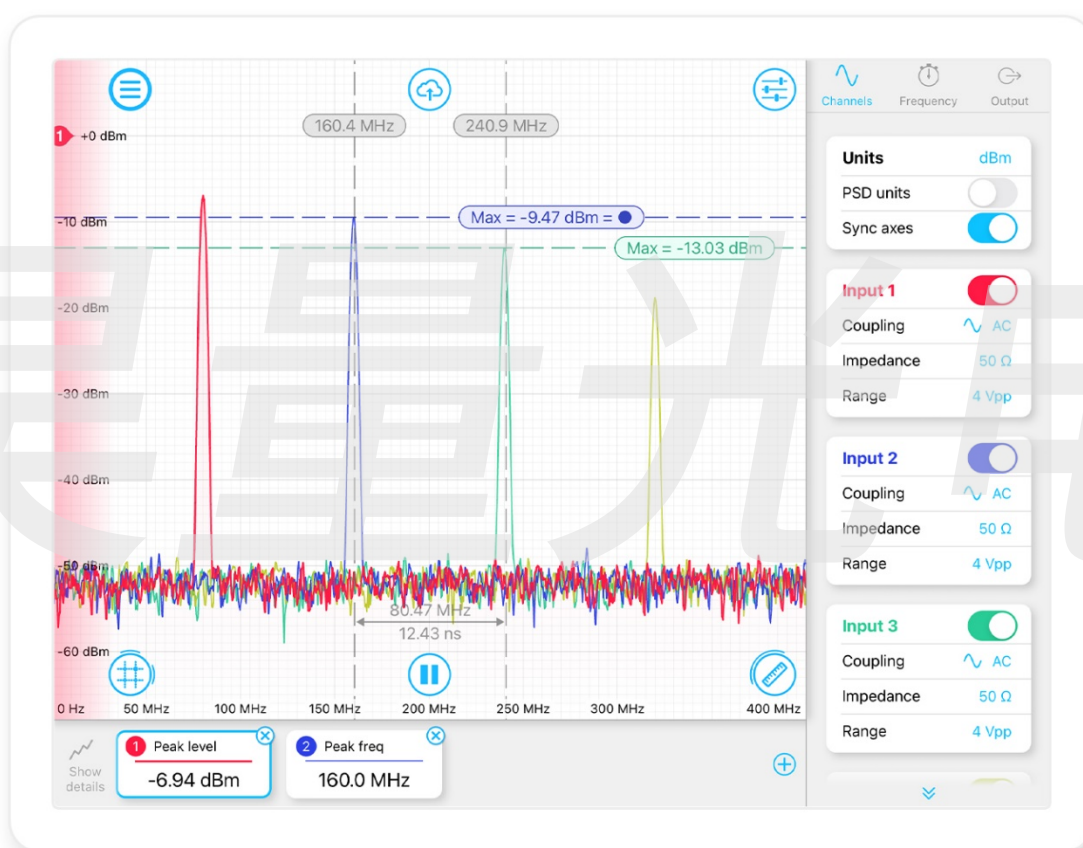

Features

- Display and record power spectra or power spectral densities in the frequency domain from DC to 300 MHz
- Generate four sine waves up to 500 MHz using Moku:Pro's built-in analog outputs
- Quickly measure important metrics by dragging measurement cursors onto features of interest using the iPad's multi-touch interface
- Live measurement functions: peak level, peak frequency, noise level, peak SNR, and occupied bandwidth



Specifications

Frequency

Frequency

Range	DC to 300 MHz
Span	100 Hz to 300 MHz

Resolution bandwidth (RBW)

Modes	Auto	Automatically sets the RBW based on the current span and window function
	Manual	Allows the user to manually set the RBW within the limits tolerated by the span and window function
	Min	Sets the RBW at the minimum possible value for the current span and window function The minimum RBW is 2.2 Hz
Windows	None (uniform), Hanning, Flat Top, Blackman-Harris	

Amplitude

Voltage

Channels	4
Input coupling	AC / DC
Input impedance	50 Ω / 1 M Ω
Input attenuation	0 dB / 20 dB
Input bandwidth (-3 dB)	300 MHz / 600 MHz switchable
Input voltage range	0.4 V _{pp} into 50 Ω with 0 dB attenuation 4 V _{pp} into 50 Ω with 20 dB attenuation 40 V _{pp} into 50 Ω with 40 dB attenuation

Display

Scales	Volts, dBm, dBV
Display modes	Power, Power Spectral Density (PSD)
Video bandwidth (VBW)	10 Hz to 380 kHz depending on span
Averages	1 to 100
Persistence	Off, 100 ms to 10 s, infinite



Synthesizer

Synthesizer

Channels	4
Output impedance	50 Ω
Waveforms ⁷	Sine
Output frequency range	1 mHz to 500 MHz
Sweep mode	Sweeps the output frequency across the current span with a fixed sweep period of 5 seconds
Output voltage range	> 100 MHz: 2 V _{pp} into 50 Ω 1 mHz to 100 MHz: 10 V _{pp} into 50 Ω

昊量光电


⁷ Modulation not available for waveforms synthesized using the oscilloscope instrument.



Moku:Pro's Waveform Generator

Description

Moku:Pro's Waveform Generator enables you to generate four independent waveforms with a maximum bandwidth of 500 MHz. Select between sine, square, ramp, pulsed, or DC waveform shapes. High bandwidth modulation of phase, frequency, or amplitude, or generate triggered bursts or sweeps from an internal or external source.

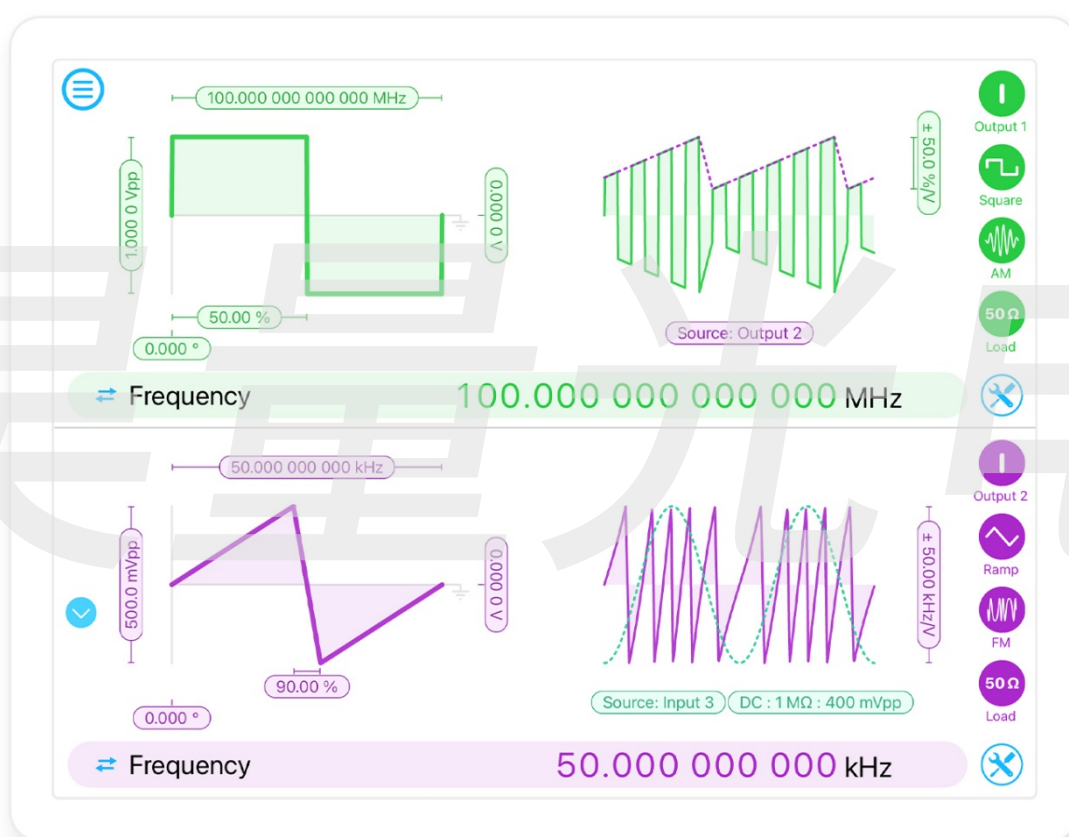

Features

- Generate 4 independent phase coherent waveforms from DC to 500 MHz Specifications.
- 5 built-in waveforms: sine, square, ramp, pulse, and DC.
- Broadband FM, AM, and PM modulation with internal waveform (cross-channel modulation) or external input.
- Versatile trigger options: from input, dedicated TTL trigger port, or another channel.
- 10 MHz reference input and output.



Common characteristics

Overview

Channels	4
Bandwidth (maximum output frequency)	500 MHz (2 V _{pp} into 50 Ω), 100 MHz (10 V _{pp} into 50 Ω)
Sampling rate	1.25 GSa/s per channel
Output impedance	50 Ω
Waveforms	Sine, Square, Ramp, Pulse, DC

Amplitude

Range	1 mV _{pp} to 10 V _{pp} into 50 Ω
Offset error	< 500 μV into 50 Ω
Resolution	100 μV
Units	V _{pp} , dBm

DC offset

Range (peak AC + DC)	± 5 V into 50 Ω
Resolution	100 μV

Phase offset

Range	0° to 360°
Resolution	0.001°

Waveform characteristics

Sine

Frequency range	1 mHz to 500 MHz
-----------------	------------------



Square

Frequency range	1 mHz to 150 MHz
-----------------	------------------

Ramp

Frequency range	1 mHz to 150 MHz
Symmetry ⁸	16% to 84% at 100 MHz 3.2% to 96.8% at 20 MHz 0.8% to 99.2% at 5 MHz

Pulse

Frequency range	1 mHz to 150 MHz
Period range	1 ks to 5 ns
Pulse width	2 ns to (period - edge time)
Edge time	2 ns to pulse width
Edge time resolution	1 ns

Modulation

Amplitude

Carrier waveforms	Sine, Square, Ramp, Pulse
Source	Internal, External
Internal modulation	Sine
Frequency	1 mHz to 125 MHz
Depth	0% to 100%

Frequency

Carrier waveforms	Sine, Square, Ramp, Pulse
Source	Internal, External
Internal modulation	Sine
Frequency	1 mHz to 125 MHz
Deviation (carrier + deviation)	1 mHz to 125 MHz

Phase

Carrier waveforms	Sine, Square, Ramp, Pulse
Source	Internal, External
Internal modulation	Sine
Frequency	DC to 125 MHz

⁸ Symmetry is limited by the minimum rise time of 2 ns and number of harmonics required to maintain a linearity of more than 99%.



Phase

Phase shift	0.0° to 360.0°
-------------	----------------

Burst

Modes of Operation	Start, N-Cycle, Gated
--------------------	-----------------------

N-Cycle range	1 to 1,000,000
---------------	----------------

Trigger Sources	Ch1: Input 1, Input 2, Input 3, Input 4, Output 2, Output 3, Output 4, External, Internal Ch2: Input 1, Input 2, Input 3, Input 4, Output 1, Output 3, Output 4, External, Internal Ch3: Input 1, Input 2, Input 3, Input 4, Output 1, Output 2, Output 4, External, Internal Ch4: Input 1, Input 2, Input 3, Input 4, Output 1, Output 2, Output 3, External, Internal
-----------------	--

Sweep

Sweep Frequency Start/End	Sine: 1 mHz to 500 MHz Square, Ramp, Pulse: 1 mHz to 200 MHz
---------------------------	---

Sweep Time	1 ms to 1 ks
------------	--------------

Trigger Sources	Ch1: Input 1, Input 2, Input 3, Input 4, Output 2, Output 3, Output 4, External, Internal Ch2: Input 1, Input 2, Input 3, Input 4, Output 1, Output 3, Output 4, External, Internal Ch3: Input 1, Input 2, Input 3, Input 4, Output 1, Output 2, Output 4, External, Internal Ch4: Input 1, Input 2, Input 3, Input 4, Output 1, Output 2, Output 3, External, Internal
-----------------	--

Nominal Trigger Level	Input Channel: 1.8 V Output Channel: 0.5 V External: 1.2 V
-----------------------	--

昊量光电

This information is subject to change without notice.

© 2021 Liquid Instruments. All rights reserved.