




## MOA/MSA Optical Amplifier/Seeded Amplifier

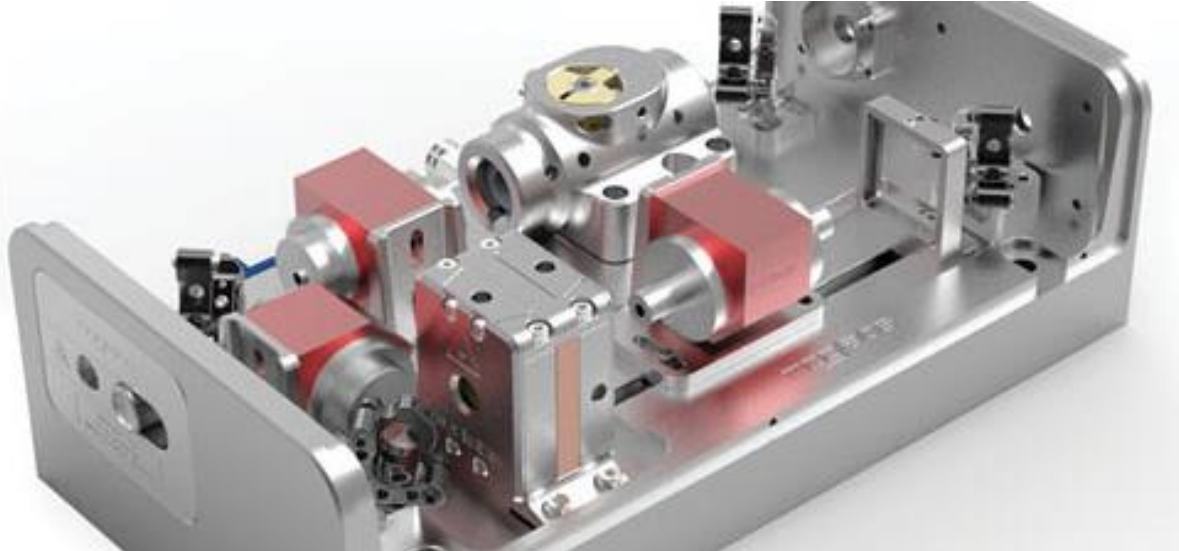

The MOGLabs Optical Amplifier is a high-power extension for single-frequency external cavity diode lasers.

Laser power is increased by up to 4W, while maintaining the tunability and linewidth of the injection seed laser.

Replacement of the amplifier diode and alignment are easily accomplished by the end-user. Options include 35 or 70dB of input isolation and 35dB on the output, and fibre coupling of input or output or both.

Wavelength options extend from 630nm to 1064nm, and power from 250mW to 3000mW.

Also available as cateye laser seeded amplifier MSA as shown.

### *Features*

- Wavelength 630nm – 1064nm
- Output power up to 3W
- Optional input and output Faraday isolators
- Optional input and output fibre coupling
- Simple customer TA diode replacement
- Stable flexure alignment

### *Applications*

- Laser cooling and trapping
- Bose-Einstein condensation
- Quantum optics: squeezed light
- Electromagnetic transparency and slow light
- Time and frequency standards
- Laser spectroscopy
- Physics teaching labs

# Optical Amplifier/Seeded Amplifier

## Specifications MOA/MSA

### Wavelength/frequency

Wavelength	630nm – 1064nm
Gain bandwidth	10nm to 30nm, wavelength dependent
Power	250mW, 500mW, 1W, 2W, 3W and 4W options, wavelength dependent
Gain	Up to 23dB (200x)
Seed input power	10mW to 30mW, depending on amplifier diode
ASE suppression	>45dB

### Optical

Beam diameter ( $1/e^2$ )	Typically 1.8 x 3.0 mm, wavelength dependent
Beam quality	$M^2$ from 1.1 to 1.7
Beam divergence	<1.5 mrad (630 – 670nm: <2.5 mrad)
Polarisation	Linear 100:1

### Thermal



TEC	$\pm 14V$ 3.3A Q = 34W standard
Sensor	NTC 10k $\Omega$
Cooling	Quick-fit water cooling, $\phi$ 6mm

### Electronics

Protection	Relay, reverse diode, photodiode cutout
Indicator	Laser ON/OFF (LED)
Connectors	DE9 (temperature control) and DE15 (current control)

### Dimensions

Dimensions	300 x 155 x 93mm (LxWxH)
------------	--------------------------

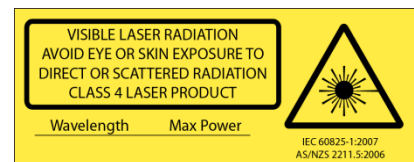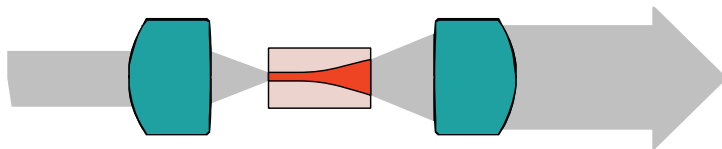

### 上海昊量光电设备有限公司

中国区代理

官网: [www.auniontech.com](http://www.auniontech.com) 电话: +86-021-51083793

邮箱: [info@auniontech.com](mailto:info@auniontech.com)

地址: 上海市徐汇区漕宝路 86 号光大会展中心 F 座 3 楼

**MOG Laboratories Pty Ltd**  
Stes 34-35, 49 University St  
Carlton VIC 3053  
Australia  
Tel: +61 3 9939 0677  
[info@moglabs.com](mailto:info@moglabs.com)

**MOGLabs USA**  
419 14th St  
Huntingdon, PA 16652  
USA  
Tel: +1 814 251 4363  
[info@moglabsusa.com](mailto:info@moglabsusa.com)

**MOGLabs Europe**  
Goethepark 9  
10627 Berlin  
Germany  
Tel: +49 30 21 960 959  
[christoph.p@moglabs.com](mailto:christoph.p@moglabs.com)

© 2017 MOG Laboratories Pty Ltd  
Product specifications and descriptions  
in this document are subject to change  
without notice