



PROTEUS

Infinite possibilities

AWG&AWT Models



Modular, scalable and compact


Based on PXI Express industry standard the modular architecture can easily scale to hundreds of channels, while keeping the required space to a minimum. The compact form size enables up to 4 generator output channels and 2 digitizer input channels to occupy only 3 PXI slots. So for synchronized, phase coherent, multi-channel applications such as quantum physics and radar applications the Proteus arbitrary waveform transceiver is an ideal, space efficient and cost effective solution.

Ultra-fast communication interface

Spending more time setting up your generated scenario than actually running it? The PCI Express Gen 3 x8 lanes connection enables up to 64Gb/s of data transfer speed. This enables the Proteus arbitrary waveform transceiver to offer the fastest waveform download available on the market today, saving you one of your most valuable resources, time.

Feedback control system

Many of today's applications, require conditional waveform generation depending on input signals from the environment. The Proteus arbitrary waveform transceiver flawlessly integrates both DAC and ADC in one system, controlled by a single FPGA for optimal synchronization and minimum latency. This high speed control system provides a feedback loop for fast decision making on the fly with minimum latency.

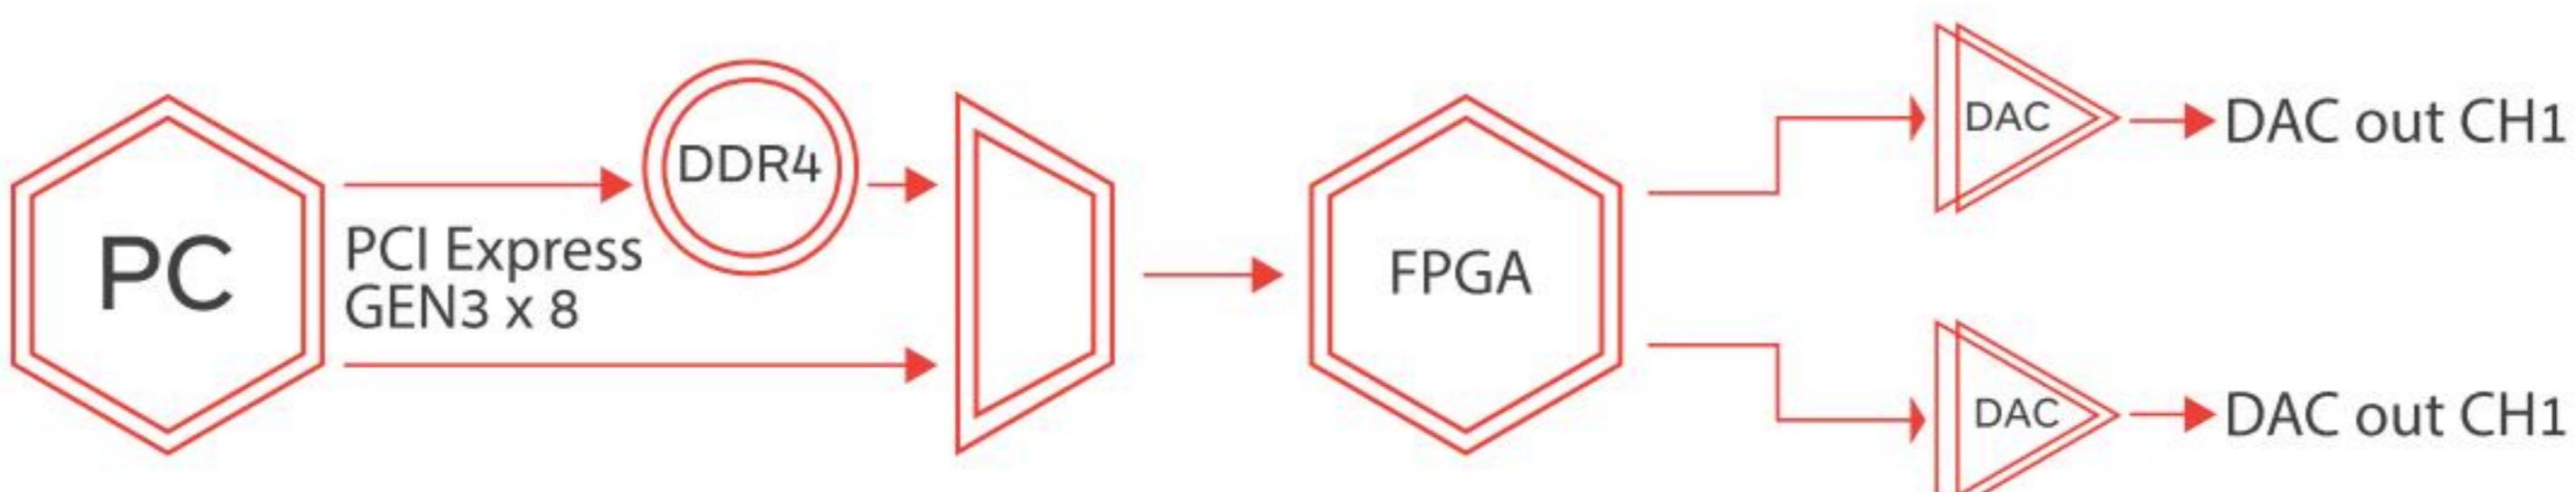

Generate any imaginable scenario

The new series offers an innovative task oriented sequence programming where user can change the full instrument set up at every line of the task table. In addition, not only can users of the Proteus series instruments generate and download waveforms simultaneously, they can stream data directly to the FPGA without the need to use the built in memory. This enables generating random, unique and infinitely long scenarios directly from the controlling PC at DAC speeds of up to 9GS/s. So no matter whether your scenario is extremely complex, infinite or even dynamic you can generate it with the Proteus series model




PROTEUS

Infinite possibilities

Benchtop Platform

Introducing Tabor's all new Proteus series, the world's first Arbitrary Waveform Transceiver. In its benchtop platform, with a 9" touch display and on-board PC the system integrates the ability to transmit, receive and perform digital signal processing all in a single instrument. The fully standalone operated system, offers industry leading performance, various configuration options, an innovative task oriented programming, and user programmable FPGA. So whether it is for aerospace and defense, telecommunications, automotive, medical or high-end physics applications Proteus opens the door to a world of infinite possibilities.

Leading Features:




Dual, four, eight or twelve channel 1.25GS/s & 2.5 GS/s 16 bit, or dual, four or six channel 9GS/s 16 bit, AWG & AWT configurations




Integrated NCO for digital up-converting to microwave frequencies

Real time data streaming directly to the FPGA for continuous and infinite waveform generation




8GHz bandwidth, 2.7GS/s 12 bit digitizer option for feedback control system and conditional waveform generation

Innovative task oriented sequence programming for maximum flexibility to generate any imaginable scenario



Excellent phase noise and spurious performance

User customizable FPGA for application specific solutions

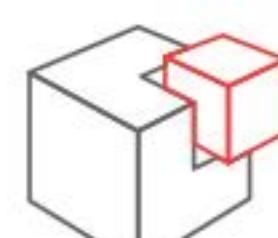

Standalone 4U, 19" wide benchtop platform, with 9" touch display, USB 3.0, 10G Ethernet and thunderbolt high speed interfaces



Up to 16GS/s waveform memory with the ability to simultaneously generate and download waveforms.

CHANNELS CHARACTERISTICS	P9082/4/6B	P2582/4/8/12B	P1282/4/8/12B
NUMBER OF CHANNELS	2/4/6	2/4/8/12	2/4/8/12
INITIAL SKEW		<20ps	
FINE DELAY			
RANGE		0 to 5 ns	
RESOLUTION		5ps	
ACCURACY		±5ps	
COARSE DELAY			
RANGE		0 to wavelength	
RESOLUTION		1 sample point	

ARBITRARY MODE	P9082/4/6B	P2582/4/8/12B	P1282/4/8/12B
MAX. SAMPLE RATE	9GS/s	2.5GS/s	1.25GS/s
RESOLUTION		Up to 16-bit (Depending on model and mode)	
MAX. MEMORY SIZE	Up to 16GS		Up to 8GS
NUMBER OF SEGMENTS			64k
MINIMUM SEGMENT LENGTH			
NORMAL	2048 points		1024 points
FAST SEGMENT	224 points		64 points
WAVEFORM GRANULARITY			
STANDARD	64 points	32 points	32 points
OPTIONAL	32 points	16 points	16 points
INTERPOLATION MODES	x1		x1, x2 and x4

TASK MODE	
TASK TABLE LENGTH	64K tasks per channel
TASK LOOPS	1M
SEQUENCE	A sequence is defined as a continuous and looped series of tasks
MAX. NUMBER OF SEQUENCES	32K sequences
SEQUENCE LOOPS	1M
SCENARIO	A scenario is defined as a continuous series of tasks/sequences
MAX. NUMBER OF SCENARIOS	1K scenarios

STREAMING (STM OPTION)	
MAX. STREAM RATE	6GS/s
MINIMUM PC REQUIREMENTS	
CPU	i7
MEMORY	32G
OPERATING SYSTEM	WINDOWS 10
SOURCE	Internal / Rear panel interfaces

SIGNAL PURITY	DC OUTPUT	DIRECT OUTPUT
HARMONIC DISTORTION ⁽¹⁾		
fout = 10 MHz - 200 MHz, Measured @ DC to 2 GHz	<-70 dBc (typ.)	<-70 dBc (typ.)
fout = 200 MHz ... 1.5 GHz, Measured @ DC to 4.5 GHz	<-60 dBc (typ.)	<-60 dBc (typ.)
fout = 1.5 GHz ... 4.5 GHz, Measured @ DC to 4.5 GHz	<-50 dBc (typ.)	<-50 dBc (typ.)
SFDR ⁽²⁾		
fout = 10 MHz...500 MHz, Measured @ DC to 1.5 GHz	-80 dBc (typ)	<-85 dBc (typ)
fout = 500 MHz...4.5 GHz , Measured @ DC to 4.5 GHz	-70 dBc (typ)	<-75 dBc (typ)
PHASE NOISE (@10kHz offset)		
fout = 140.625MHz	-134 dBc/Hz	
fout = 280.25MHz	-128 dBc/Hz	
fout = 562.5MHz	-122 dBc/Hz	
fout = 1.125GHz	-116 dBc/Hz	
fout = 2.25GHz	-110 dBc/Hz	
fout = 4.5GHz	-104 dBc/Hz	

⁽¹⁾ SCLK=Max sample rate, amplitude = 400mVpp, Direct mode, measured using balun

⁽²⁾ SCLK=Max sample rate, amplitude = 400mVpp, excluding SCLK/2-fout, measured using balun



PROTEUS

Infinite possibilities

DC OUTPUT		SYNC CLOCK OUTPUT	
OUTPUT TYPE	Single-ended or differential, DC-coupled	AMPLITUDE	500mVpp, typ.
IMPEDANCE	50Ω (nom)	FREQUENCY	SCLK/32 SCLK/8
AMPLITUDE	50 mVp-p to 1.3 Vp-p	WAVEFORM	Square
AMPLITUDE RESOLUTION	1mV	RISE/FALL TIME (20% TO 80%)	<150ps
DC AMPLITUDE ACCURACY	±(3% of amplitude ± 2 mV)	IMPEDANCE	LVC MOS
VOLTAGE WINDOW	±1.15V	CONNECTOR	SMP
DC OFFSET	±0.5V	MARKER OUTPUTS	
OFFSET RESOLUTION	10mV	NUMBER OF MARKERS	4 8 12 16 24
DC OFFSET ACCURACY	±(3% of setting ±15 mV)	OUTPUT TYPE	Single Ended
SKEW BETWEEN NORMAL AND COMPLEMENT OUTPUTS	0ps	OUTPUT IMPEDANCE	50Ω (nom)
RISE/FALL TIME (20% TO 80%)	< 130 ps (typ)	AMPLITUDE	
INSTANTANEOUS BANDWIDTH P128xB P258xB P908xB	625MHz 2.25GHz 4.5GHz	VOLTAGE WINDOW	±1.15V
MAX. USABLE FREQUENCY P128xB P258xB P908xB	2nd Nyquist 1.25GHz 2.5GHz 4.5GHz	LEVEL	32mVpp to 1.2Vpp (32 discrete levels)
JITTER (PEAK-PEAK)	<15 ps (typ)	RESOLUTION	10mVpp
OVERSHOOT	<5% (typ)	ACCURACY	±7%
CONNECTOR TYPE	SMA	OFFSET	
DIRECT OUTPUT (OPTIONAL)		RANGE	±0.5V
OUTPUT TYPE	Single-ended or differential, AC coupled	RESOLUTION	10mV
IMPEDANCE	50Ω (nom)	ACCURACY	±(3% of setting ±15 mV)
AMPLITUDE	600mVpp, single-ended into 50Ω	RISE/FALL TIME (20% TO 80%)	<200ps
AMPLITUDE RESOLUTION	1mV	RANGE	0 - waveform length
AMPLITUDE ACCURACY	±(3% of amplitude ± 2 mV)	RESOLUTION	P128xB, P258xB P908xB 2 pts 8 pts
RISE/FALL TIME (20% TO 80%)	< 60 ps (typ)	MARKER DELAY	
INSTANTANEOUS BANDWIDTH P128xB P258xB P908xB	625MHz 2.25GHz 4.5GHz	COARSE DELAY	
MAX. USABLE FREQUENCY P128xB P258xB P908xB	2nd Nyquist 1.25GHz 2.5GHz 9GHz	RANGE	0 to 2048 points
CONNECTOR TYPE	SMA	RESOLUTION	P128xB, P258xB P908xB 8 points 32 points
SAMPLE CLOCK OUTPUT		FINE DELAY	
SOURCE	Selectable, internal synthesizer or sample clock input	RANGE	0 to 1.2ns
FREQUENCY RANGE	SCLK Range	RESOLUTION	1ps
OUTPUT AMPLITUDE	0.5V to 1V depending on SCLK	ACCURACY	15ps
IMPEDANCE	50Ω (nom), AC coupled	CONNECTOR TYPE	SMP
CONNECTOR	SMA		

REFERENCE CLOCK OUTPUT		FAST SEGMENT DYNAMIC CONTROL INPUT (OPTIONAL)	
SOURCE	Internal TCXO	INPUT SIGNALS	Data 10bit, Channel select 2 bit, Valid 1 bit
WAVEFORM	Square	SEGMENTS / SEQUENCES	1024 (128 fast)
FREQUENCY	100MHz or REF IN	DATA RATE	35MHz
STABILITY	+/- 2.5 PPM	(MINIMUM LATENCY) (Dynamic control input to direct out)	
AGING	+/- 1 PPM @ +25°C (per year)	FAST SEGMENT	<250ns
CONNECTOR	SMP	NORMAL SEGMENT	<1μ
REFERENCE CLOCK INPUT		INPUT LEVEL	LVTTL
INPUT FREQUENCIES	10MHz / 100MHz selectable	CONNECTOR	Mini D-SUB
LOCK RANGE	± 1MHz		
INPUT LEVEL	0.6 Vp-p to 1.7 Vp-p		
IMPEDANCE	50Ω, AC coupled (nom)		
CONNECTOR TYPE	SMP		
SAMPLE CLOCK INPUT		DIGITIZER CHARACTERISTICS (AWT OPTION)	
FREQUENCY RANGE	SCLK Range	NUMBER OF CHANNELS	1 or 2
INPUT POWER RANGE	0 to 1V	INPUT VOLTAGE RANGE	500 mVpp (full scale)
DAMAGE LEVEL	<0.5V or >1.5V	INPUT VOLTAGE OFFSET	-2V to +2V
INPUT IMPEDANCE	50Ω nom, AC coupled	INPUT FREQUENCY RANGE	9GHz
CONNECTOR TYPE	SMA	RESOLUTION	12 bits
TRIGGER INPUTS		ACQUISITION MEMORY	<2GS/ch
INPUT RANGE	±5 V	SAMPLE CLOCK SOURCES	Internal or external
THRESHOLD	±5 V	INTERNAL CLOCK SOURCE	Internal, external reference
RANGE	-5 V to +5 V	MAX SAMPLING RATE	5.4GS/s in Single channel mode 2.7Gs/s in Dual channel mode
RESOLUTION	100 mV	MIN SAMPLING RATE	1GS/s
SENSITIVITY	200 mV	CLOCK ACCURACY	< 2 ppm
JITTER		IMPEDANCE	50Ω
Standard P128xB, P258xB P908xB Low Trigger Jitter Opt.	8 SCLK periods 32 SCLK periods $\text{SQRT}(\text{SCLK period}^2 + 150\text{e-}12^2)$	COUPLING	DC or AC (factory configured)
LATENCY / SYSTEM DELAY P128xB, P258xB P908xB	<900SCLK periods <2700 SCLK Periods	CONNECTOR	SMA
POLARITY	Pos or Neg	TRIGGER SYSTEM	
SOURCE	Selectable between channels	TRIGGER MODES	Positive, negative edge
INPUT IMPEDANCE	10 kΩ or 50Ω (nom), DC coupled, factory configured	TRIGGER SOURCES	External, Software, Channel
MAX TOGGLE FREQUENCY	50MHz	COUPLING	DC
MINIMUM PULSE WIDTH	5ns	IMPEDANCE	50Ω (nominal)
CONNECTOR TYPE	SMP	LEVEL RANGE	>± 2.5 V (nominal)
		FREQUENCY RANGE	DC to 65MHz
		CONNECTOR	SMA
FPGA PROGRAMMING			
FPGA TYPE	Xilinx Kintex UltraScale XCKU060 upgradeable to XCKU115		
MODES			
STANDARD	Tabor standard built-in functionality		
DECISION BLOCKS	Built-in library of mathematical functions, modulation & digital Filters		
SHELL	Open core providing all interfaces and configuration path to the user		



PROTEUS

Infinite possibilities

DIGITAL UPCONVERTER	
MODES	NCO Only / Digital Upconverter
SAMPLING RATE	1GS/s to Max sample rate
CARRIER FREQUENCY	
RANGE	0 to 40% of Sampling rate
RESOLUTION	48 bit
PHASE RANGE	0 to 360°
PHASE RESOLUTION	16 bit
ALL IQ PARAMETERS	Same as Arbitrary mode
GENERAL	
VOLTAGE RANGE:	
FREQUENCY RANGE:	47Hz to 63Hz
POWER CONSUMPTION:	550W max.
INTERFACE: USB	1 x front panel USB host (type A) 2 x rear panel USB host, (type A) 1 x front panel USB Device (type C)
Thunderbolt (Optional)	1 x rear panel Thunderbolt3
LAN (BASE-T)	1 x rear panel RG45 1000/100/10
SFP+ (LAN replacement Opt.)	1 x rear panel SFP+ 10G Optical
GPIB (Option)	IEEE 488.2 – GPIB
STORAGE	120GB removable
WEIGHT Without Package Shipping Weight	7.5 Kg 9 Kg
DIMENSIONS: With feet Without feet	440 X 175 x 330 mm (W x H x D) 440 X 190 x 330 mm (W x H x D)
TEMPERATURE: Operating Storage Warm up time	0°C to +40°C -40°C to +70°C 15 minutes
HUMIDITY:	85% RH, non-condensing
SAFETY:	CE Marked, EC61010-1:2010
EMC:	IEC 61326-1:2013
CALIBRATION:	2 years
WARRANTY:	1/3 year warranty plan
ORDERING INFORMATION	
MODEL	DESCRIPTION
P1282B	1.25GS/s, 16Bit, AWG, 1GS Memory, 2CH, 4 Markers
P1284B	1.25GS/s, 16Bit, AWG, 1GS Memory, 4CH, 4 Markers
P1288B	1.25GS/s, 16Bit, 2GS Memory, 8CH 8 Markers
P12812B	1.25GS/s, 16Bit, 2GS Memory, 12CH 12 Markers
P2582B	2.5GS/s, 16Bit, 2GS Memory 2CH, 8 Markers
P2584B	2.5GS/s, 16Bit, 2GS Memory, 4CH, 8 Markers
P2588B	2.5GS/s, 16Bit, 2GS Memory, 8CH 16 Markers
P25812B	2.5GS/s, 16Bit, 2GS Memory, 12CH, 24 Markers
P9082B	9GS/s 16Bit, 4GS Memory 2CH, 8 Markers
P9084B	9GS/s 16Bit, 4GS Memory 4CH, 16 Markers
P9086B	9GS/s 16Bit, 4GS Memory 6CH, 24 Markers

OPTIONS	
4M1	4GS Memory option for models P1282x & P2582x
4M2	4GS Memory option for models P1284x & P2584x
4M3	4GS Memory option for models P1288x, P2588x & P9084x
4M4	4GS Memory option for models P12812x, P25812x&P9086x
8M1	8GS Memory option for models P1282x & P2582x
8M2	8GS Memory option for models P1284x, P2584x & P9082x
8M3	8GS Memory option for models P1288x, P2588x & P9084x
8M4	8GSMemory option for models P12812x, P25812x & P9086x
16M1	16GS Memory option for models P9082x
16M2	16GS Memory option for models P9084x
16M3	16GS Memory option for models P9086x
DO1	9GHz BW Direct Output option for models P1282x & P2582x
DO2	9GHz BW Direct Output option for models Pxx84x & P9082x
DO3	9GHz BW Direct Output option for models Pxx88x & P9084x
DO4	9GHz BW Direct Output option for models Pxx812x & P9086x
FS1	Fast Segment Control option for models P1282x & P2582x
FS2	Fast Segment Control option for P1284x, P2584x & P9082x
FS3	Fast Segment Control option for P1288x, P2588x & P9084x
MRK1	x8 Extra Markers option for models P1282B and P2582B
MRK2	x8 Extra Markers option for models P1284x, P2584B and P9082B
MRK3	x16 Extra Markers option for models P1288B, P2588B and P9084B
LTJ1	Ultra Low Trigger Jitter (200ps typ.) option for models P1282x & P2582x
LTJ2	Ultra Low Trigger Jitter (200ps typ.) option for models P1284x, P2584x & P9082x
LTJ3	Ultra Low Trigger Jitter (200ps typ.) option for models P1288x, P2588x & P9084x
LTJ4	Ultra Low Trigger Jitter (200ps typ.) option for models P12812x, P25812x & P9086x
G1	Low Waveform Granularity option for models P1282x & P2582x
G2	Low Waveform Granularity option for P1284x, P2584x & P9082x
G3	Low Waveform Granularity option for P1288x, P2588x & P9084x
G4	Low Waveform Granularity option for P12812x, P25812x&P9086x
AWT	5.4GS/s Single, 2.7GS/s Dual Channel 12 Bit Digitizer option for models P1284M, P2584M & P9082M
STM	6GS/s Streaming option
PROG	High level FPGA programming capability through decision blocks of built-in Demodulation & digital Filters
Shell	Open core integration to allow simple FPGA control & programming
TBolt	Rear panel Thunderbolt3 USB (type C)
SFP+	Rear panel 10G optical SFP+ connectivity (replace the LAN)