


VEGA



Compact, high-energy picosecond fiber laser

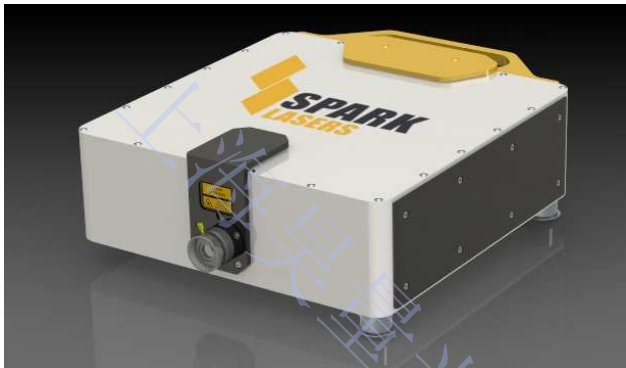

VEGA produces high energy with short (<100ps) pulses, in a compact and robust format. Offering one of the World's lowest cost of ownership, high precision and ease of integration, VEGA is ideally suited for industrial applications such as thin film removal, glass engraving or micron-scaled features drilling/cutting used in a wide variety of market segments.

From single shot to 1 MHz, its efficient, industrial GUI is Industrials best ally to fine tune even the most challenging processes whatever the PRF.

VEGA embeds perfectly into any kind of systems working in a 24/7 operating environment, year wide. Its very reduced footprint, weight and capital investment make it the money-maker you need.



www.spark-lasers.com
Phone : +33 564 310 484
info@spark-lasers.com

VEGA Key Features

- 40W at 1064 nm
- PRF range single shot to 1 MHz
- Seeder burst mode
- $M^2 < 1.2$
- Low CoO, Fast ROI
- Rugged design
- Plug-and-play
- Maintenance free
- Worldwide warranty coverage 24 months

VEGA applications

- Consumer Electronics
- Automotive/Aerospace
- Food industry
- Medical & Bio-Medical
- PV cells

Technical Specifications*


Model	VEGA-1064	VEGA-532**
Wavelength	1064 nm	532 nm
Spectral width	< 2 nm	< 2 nm
Pulse duration	<120 ps	<100 ps
Pulse energy	40 µJ from single shot to 500 kHz	20 µJ from single shot to 500 kHz
Repetition rate	Single pulse to 1 MHz (with burst mode)	Single pulse to 1 MHz (with burst mode)
M ²	<1.2	<1.2
Beam waist diameter	1 mm	1 mm
Beam waist location	At output port +-50% RR	At output port +-50% RR
Beam pointing	<25 µrad/°C	<25 µrad/°C
Ellipticity	>0.85	>0.85
Warm-up time ¹	< 15 min	< 15 min
Power stability	<2% RMS	<4% RMS
Pulse stability	<2% RMS	<4% RMS
Polarization ²	Vertical, >100:1	Vertical, >100:1
Pulse control	Ext AOM with gating	Ext AOM with gating
Laser head dimensions (mm ³)	300 x 300 x 80	300 x 300 x 80
Laser controller dimensions	19"/3U rack	19"/3U rack
Standard umbilical length ³	3 m	3 m
Power consumption	100 to 240 VAC < 400 W	100 to 240 VAC < 400 W
Cooling	Air cooled	Air cooled

1. From cold start. Time required to stabilize the output power at specified RMS Power stability.
2. Direction of linear polarization is factory set depending on the user needs.
3. Can be upgraded up to 10 m, contact us for more details.

* Specifications subject to change without notice.

** Other wavelengths available upon request

For custom specifications, please contact us

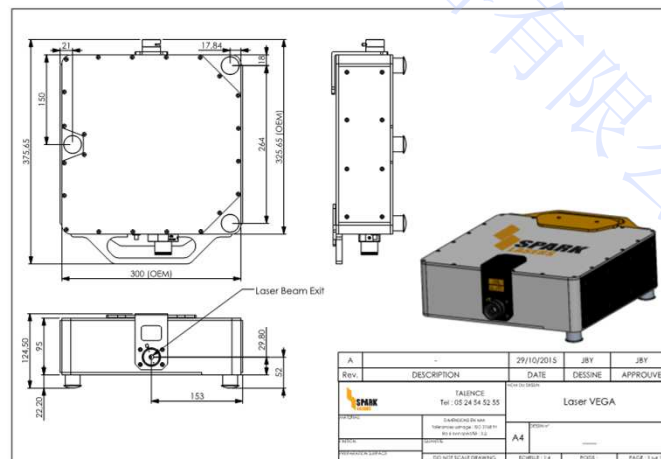

SPARK LASERS offers a 24-month warranty for all VEGA laser range.
For full details of this warranty coverage, please refer to our website www.spark-lasers.com or contact us at +33 564 310 484



Batiment IOA
Rue François Mitterrand
33400 Talence
FRANCE

Contact

www.spark-lasers.com

Phone : +33 564 310 484

info@spark-lasers.com