



Narrowband Tunable Optical Filters (Gaussian-Shape)

Narrowband Tunable Optical Filter of WLTF-NM (or -NE) -series is built based on free-space optics combing with diffraction grating to produce a Gaussian-shape transmission. It is a 2-port fiber-optic device. When a wide-band spectrum is injected to the input port, the tunable filter will select a target band for output and reject the rest band of spectrum. Wavelength-tuning is actuated by either a precise micrometer driver or a micro step-motor connected to a PC through a USB interface in which actuation is monitored by a built-in encoder and controlled dynamically in a closed-loop.


Patent-pending optics design offers a great option of bandwidths and tuning ranges with unprecedented low insertion loss and polarization dependent loss (PDL) in the market. Precise tuning mechanism enables filters to provide high wavelength resolution and excellent wavelength-tuning repeatability. Both of manual and electric version filters are available over X-, O-, S-, C-, & L- bands.

Key Features

- Up to 200nm wavelength tuning range available over 1000-1700nm
- Unprecedented low insertion loss and PDL
- High optical power handling
- Accurate and uniform bandwidth over whole tuning range
- Down to 0.1nm FWHM bandwidth
- High out-band suppression

Applications

- ASE noise suppression
- DWDM channel filtering
- WDM wavelength tuning
- Pulse shaping
- FBG sensor interrogation
- Tunable fiber lasers

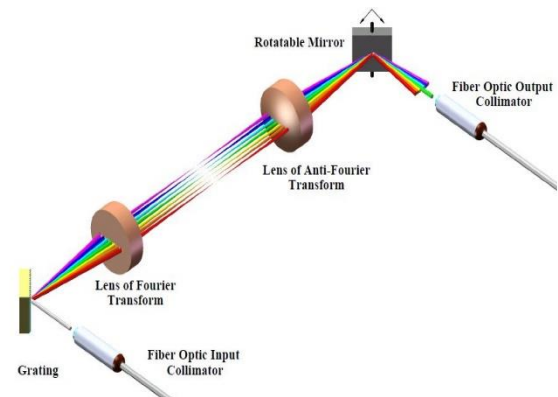

Operating Principle and Tuning Mechanism



Manual Version of WLTF-NM-P-



Electric Version of WLTF-NE-S-



Specifications of Manual Tunable Filter (WLTF-NM-)

Center Wavelength	1060nm±15nm	1310nm±15nm	1550nm±20nm	1600nm±20nm
Tuning Range	60nm 120nm	60nm 120nm	60nm 140nm	60nm 140nm
Insertion Loss ¹	1.5dB typ., 2.5dB max. over 60nm tuning range and 3.0dB max. over 120nm tuning range (connector exclusive)			
FWHM Bandwidth	1.45nm, 1.00nm, 0.90nm, 0.80nm, 0.70nm, 0.60nm, 0.50nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.15nm, 0.10nm.	1.30nm, 1.25nm, 1.15nm, 0.90nm, 0.85nm, 0.80nm, 0.75nm, 0.70nm, 0.60nm, 0.55nm, 0.50nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.15nm, 0.10nm.	1.80nm, 1.50nm, 1.40nm, 1.20nm, 0.85nm, 0.80nm, 0.70nm, 0.60nm, 0.55nm, 0.50nm, 0.45nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.15nm, 0.10nm.	1.90nm, 1.60nm, 1.25nm, 1.00nm, 0.85nm, 0.75nm, 0.65nm, 0.55nm, 0.50nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.18nm, 0.15nm.
Wavelength Resolution	0.02nm			
Wavelength Repeatability	±0.02nm			
Polarization-Dependent Loss	0.08dB typ./0.15dB max over 60nm tuning range and 0.15dB typ./0.30dB max over 120nm tuning range (SM fibre pigtail only)			
Extinction Ratio	20dB (Connector exclusive, PM fibre pigtail only)			
Spectral Shape	Gaussian-Shape			
Bandwidth Ratio of 3/20/30dB	~1/2.5/3.5			
Bandwidth Variation	±4% over 60nm and ±6% over 120nm			
Optical Power Handling ²	500mW (CW)			
Return Loss	>45dB			
Out-Band Suppression	>45dB (Transmission peak to the average of background)			
Polarization Mode Dispersion	<0.2ps (SM fiber pigtail only)			
Group Delay	<0.1ps/nm			
Pigtail Fibre Type ³	HI1060	SMF-28 or SMF-28e		
	Panda PM980	Panda PM1300	Panda PM1550	
Operating Temp	10°C to 50°C			
Storage Temp	-10°C to 75°C			
Dimension	See drawings below			
Weight	<0.5kg typical			
Other	RoHS compliant			
Note	¹ Up to 200nm tuning range is available on request.			
	² High power version up to 5.0W (CW) is available on request.			
	³ PM fibres aligned in PM slow axes (fast-axis blocking) or specify others.			




Specifications of Electric Tunable Filter (WLTF-NE-S-)


Center Wavelength	1060nm±15nm	1310nm±15nm	1550nm±20nm	1600nm±20nm
Tuning Range	40nm 80nm	45nm 95nm	50nm 110nm	50nm 110nm
Insertion Loss	1.5dB typ., 2.5dB max. over 60nm tuning range and 3.0dB max. over 110nm tuning range (Connector exclusive)			
FWHM Bandwidth	1.45nm, 1.00nm, 0.90nm, 0.80nm, 0.70nm, 0.60nm, 0.50nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.15nm, 0.10nm.	1.30nm, 1.25nm, 1.15nm, 0.90nm, 0.85nm, 0.80nm, 0.75nm, 0.70nm, 0.60nm, 0.55nm, 0.50nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.15nm, 0.10nm.	1.80nm, 1.50nm, 1.40nm, 1.20nm, 0.85nm, 0.80nm, 0.70nm, 0.60nm, 0.55nm, 0.50nm, 0.45nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.15nm, 0.10nm.	1.90nm, 1.60nm, 1.25nm, 1.00nm, 0.85nm, 0.75nm, 0.65nm, 0.55nm, 0.50nm, 0.40nm, 0.35nm, 0.30nm, 0.25nm, 0.20nm, 0.18nm, 0.15nm.
Wavelength Resolution	0.01nm for S-version			
Wavelength Repeatability	±0.01nm for S-version (from Home to Target)			
Max. Tuning Speed	40nm/Sec. for S-version			
Polarization-Dependent Loss	0.08dB typ./0.15dB max over 40nm tuning range and 0.15dB typ./0.30dB max over 110nm tuning range (SM fibre pigtail only)			
Extinction Ratio	20dB (Connector exclusive, PM fibre pigtail only)			
Spectral Shape	Gaussian-Shape			
Bandwidth Ratio of 3/20/30dB	~1/2.5/3.5			
Bandwidth Variation	±4% over 60nm and ± 6% over 120nm			
Max. Optical Power	500mW (CW). Up to 5.0W (CW) power handling available on request			
Return Loss	>45dB			
Out-Band Suppression	>45dB (Transmission peak to the average of background)			
Polarization Mode Dispersion	<0.2ps (SM fibre pigtail only)			
Group Delay	<0.1ps/nm			
Pigtail Fibre Type	HI1060	SMF-28 or SMF-28e		
	Panda PM980	Panda PM1300	Panda PM1550	
Electric Interface	USB (standard), I ² C, SPI, or RS232			
Electric Power Consumption	<0.5W (CW)			
Operating Temp	10°C to 50°C			
Storage Temp	-10°C to 75°C			
Dimension	See drawings below			
Weight	<0.5kg			
Other	RoHS compliant			



Dimensions of Manual Tunable Filter (WLTF-NM-S-version/pigtail only)

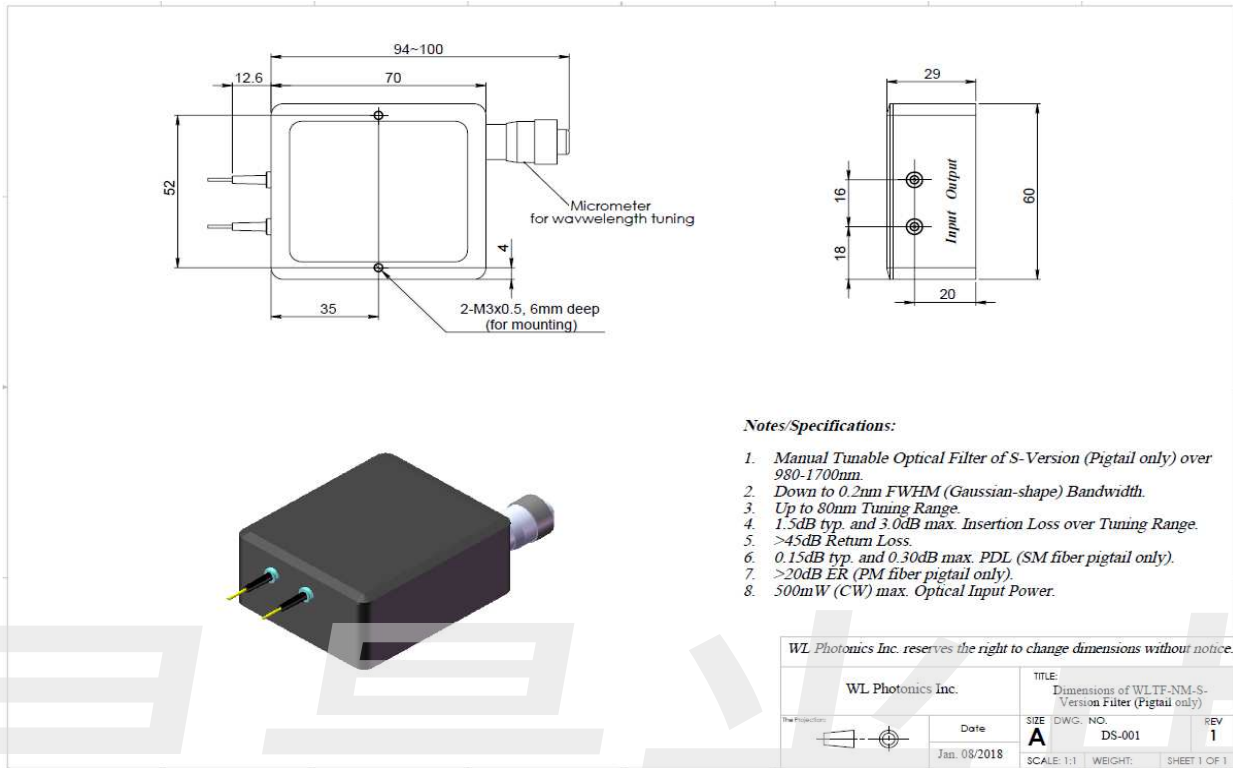


Dimensions of Manual Tunable Filter (WLTF-NM-P-version)

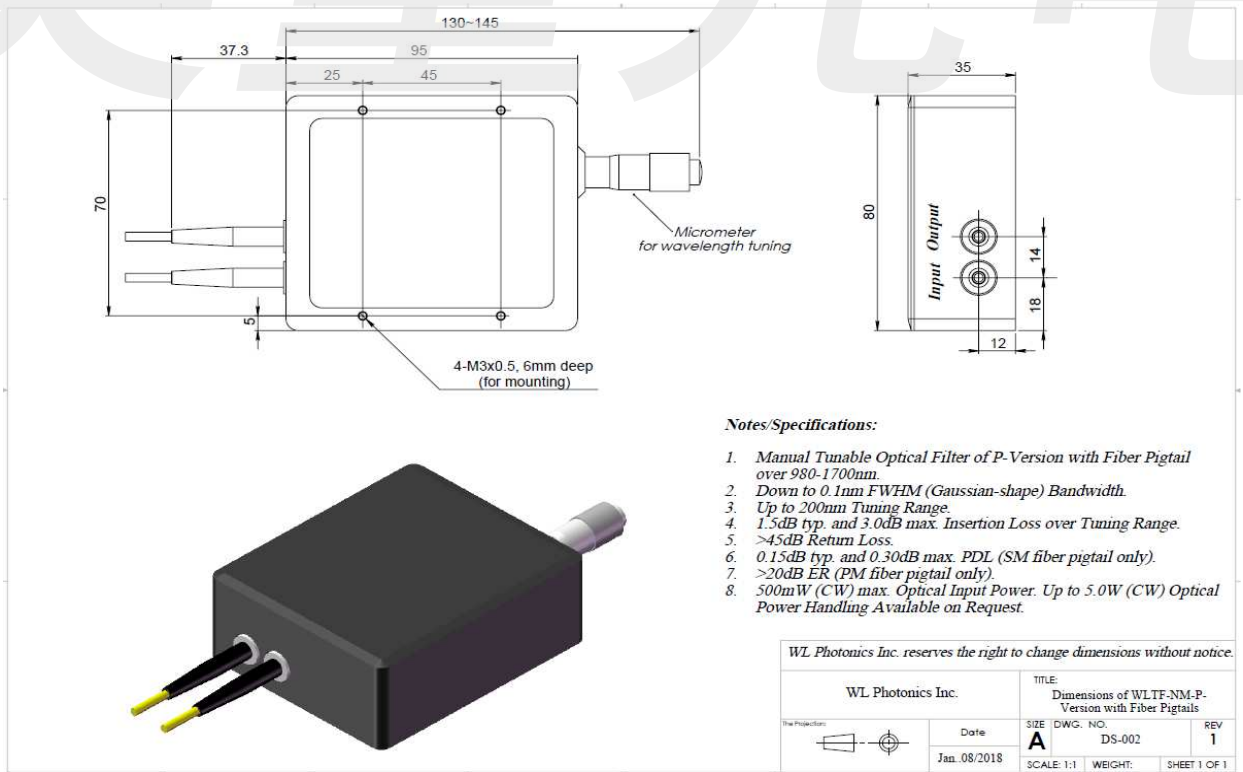




Dimensions of Electric Tunable Filter (WLTF-NE-S-version with USB interface)

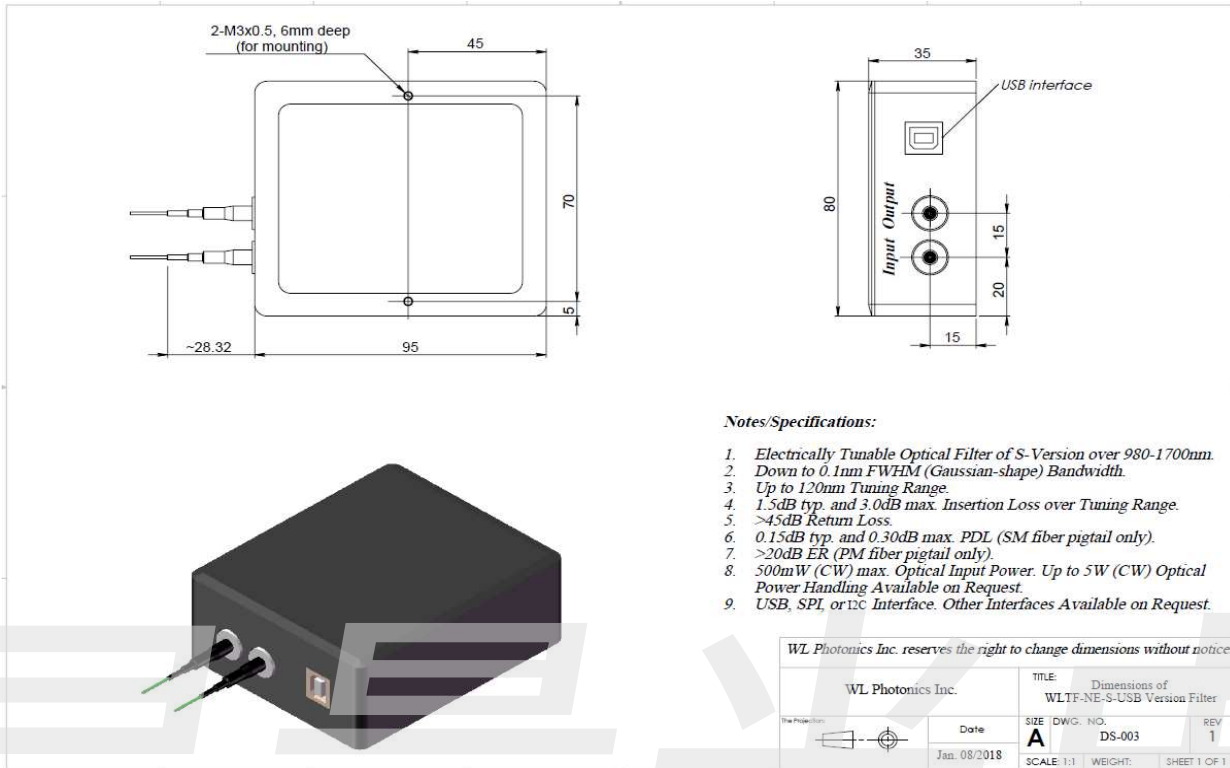


Dimensions of Electric Tunable Filter (WLTF-NE-S-version with I2C or SPI interface)


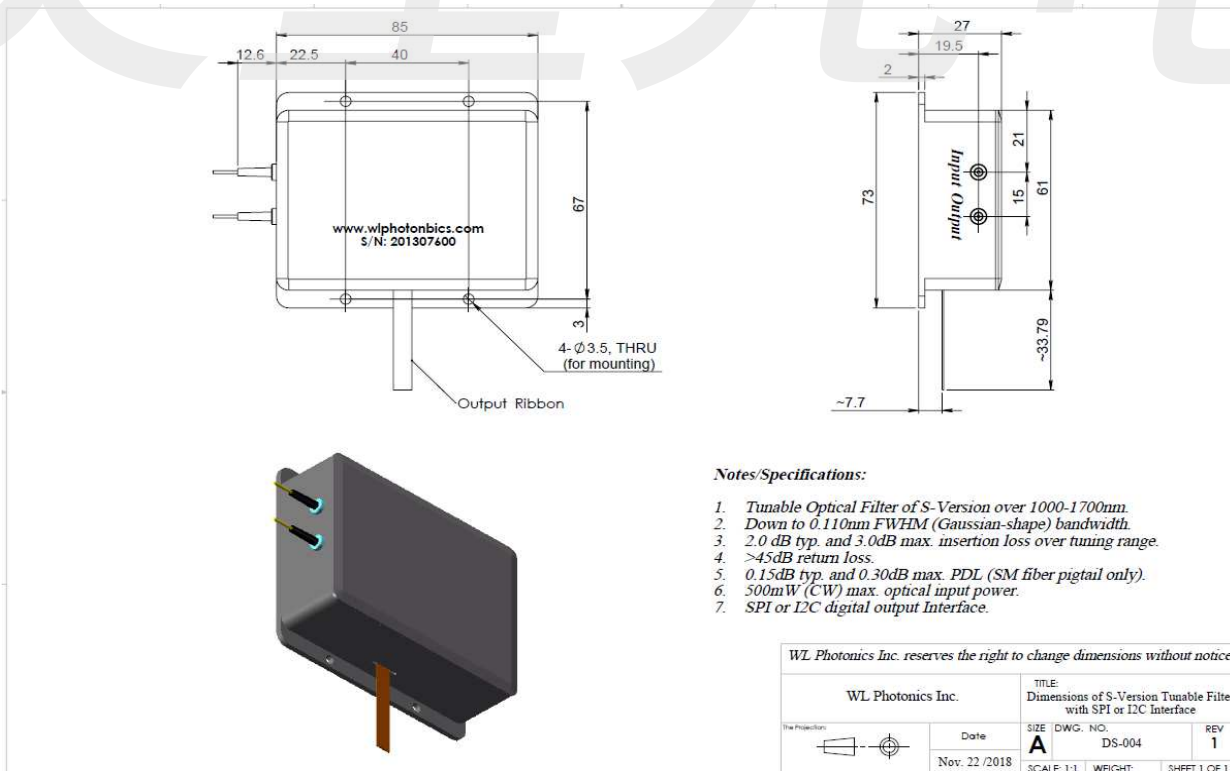






Example: Typical Transmission Spectrum and Tuning Dispersion of 0.25nm Filter over X-Band

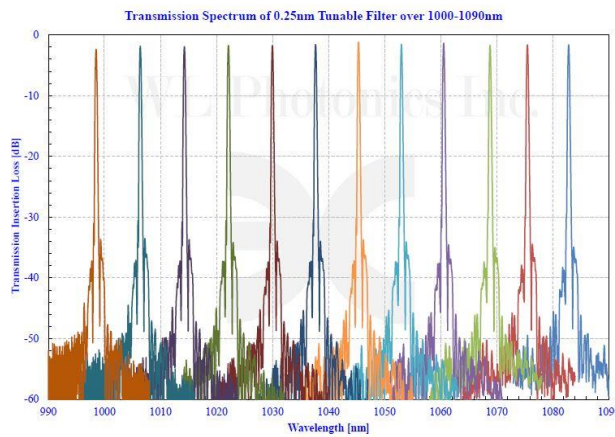

Example: Typical Transmission Spectrum and Tuning Dispersion of 0.18nm Filter over O-Band

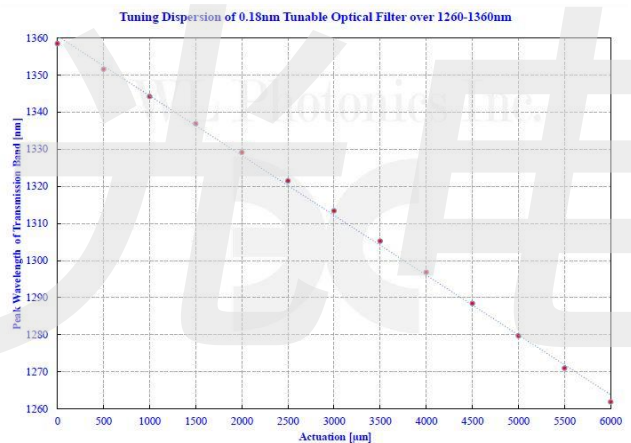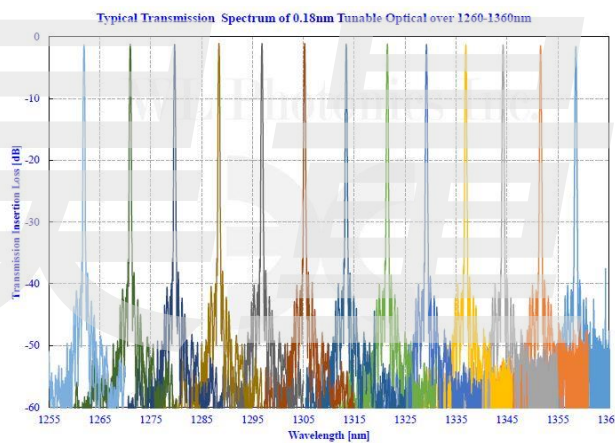

Example: Typical Transmission Spectrum and Tuning Dispersion of 0.15nm Filter over S/C/L-Band

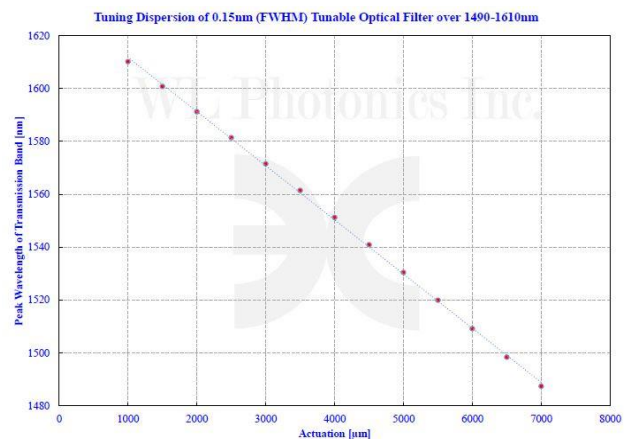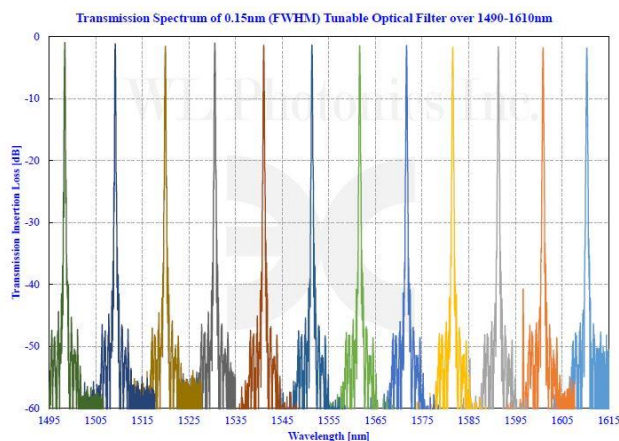



P-version of manual tunable filters covers the full specifications listed above while S-version of manual tunable filters can achieve only up to 80nm tuning range and down to 0.20nm FWHM bandwidths due to smaller housing.

USB interface of S-version electric tunable filters for Filter Wavelength Tuning (FWT) through a PC is equipped with USB-RS232 virtual serial port interface (USB B-type connector). The power supply is provided from either USB directly or an extra 5V DC (on request). It is easy to use any Serial COM Port Software in PC to control FWT, such as HyperTerminal and Tera Term. The command set is very simple and easy to drive the filter to find the home position, go to desirable center wavelengths of transmission band or any indicated positions within actuation range.

Example of FWT control interface:

```
dev?  
WL200: SN(201307374), MD(2018-11-23)  
WL Range: 1021.509~1072.505nm(Step: 4654~556)  
OK  
w11035  
Set Wavelength: 1035.000nm  
OK  
w1?  
Wavelength:1034.978nm  
OK  
s?  
Step: 3578, Err: 0, Status: 0x340880  
OK  
sb100  
SB: 100  
OK  
s?  
Step: 3479, Err: -1, Status: 0x340880  
OK  
sf100  
SF: 100  
OK  
s?  
Step: 3577, Err: 1, Status: 0x340882  
OK  
z  
Go to Zero  
OK
```



Ordering Information

Part Number of Manual Version: WLTF-NM-

A	B	C/D	E	F/G	H
---	---	-----	---	-----	---

Part Number of Electric Version: WLTF-NE-

A	B	C/D	E	F/G	H	I
---	---	-----	---	-----	---	---

- A. Version type: **P** is P-version of either pigtail or receptacle input/output interfaces. **S** is for S-version of pigtail version only.
- B. Center wavelength in nanometer: **1550** is for 1550nm center wavelength and **1310** is for 1310nm center wavelength.
- C. Tuning wavelength range in nanometer: **60** is for 60nm tuning range and **120** is for 120nm tuning wavelength range.
- D. FWHM bandwidth in nanometer: **0.5** is for 0.5nm FWHM bandwidth.
- E. Fibre type: **SM** for single mode fiber and **PM** for Panda polarization maintaining fibre, or others such as LMA or PLMA.
- F. Pigtail cable diameter in millimeter: **0.25** is for 250 μ m OD buffer fibre, **0.9** is for 900 μ m OD loose tube and **3.0** is for 3.0mm OD cable (only existing for pigtail version).
- G. Pigtail length in meter: **0.5** is for 0.5m long and **1.0** is for 1M long (only existing for pigtail version).
- H. Connector type of either pigtail termination or receptacle adapter: such as **FC/APC**, **FC/UPC**, **SC/APC** or **LU/UPC** and **00** is for no connector.
- I. Interface type of electric version filters: **USB** is for USB interface, **PC** is for PC interface and **SPI** is for SPI interface.

Example 1: WLTF-NM-P-1550-120/0.25-SM-3.0/1.0-FC/APC

Description: P-version fibre optic polarization-insensitive manually tunable optical filter of 0.25nm FWHM (Gaussian-shape) bandwidth over 1490-1610nm tuning range with 1M long, 3.0mm OD loose cabled SMF-28e fibre pigtailed and FC/APC connectors on pigtail ends. 500mW (CW) max. input optical power.

Example 2: WLTF-NM-P-1310-60/0.5-SM-FC/APC

Description: P-version fibre optic polarization-insensitive manually tunable optical filter of 0.50nm FWHM (Gaussian-shape) bandwidth over 1280-1340nm tuning range with receptacle input and output for FC/APC connectors. SMF-28 operating fibre and 500mW (CW) max. optical input power.

Example 3: WLTF-NM-S-1060-80/0.1-PM-0.9/1.0-00

Description: S-version fibre optic polarization-sensitive manually tunable optical filter of 0.1nm FWHM (Gaussian-shape) bandwidth over 1020-1100 tuning range with 1M long, 900 μ m OD loose cabled Panda PM980 fibre pigtail aligned in PM slow axes (fast-axis blocking) and no connectors on pigtail ends. 500mW (CW) max. optical input power.

Example 4: WLTF-NM-P-1550-120/0.10-PM-3.0/1.0-FC/APC-5.0

Description: P-version fibre optic polarization-sensitive manually tunable optical filter of 0.10nm FWHM bandwidth over 1490-1610 tuning range with 1M long, 3.0mm OD loose cabled Panda PM1550 fibre pigtailed aligned in PM slow axes (fast-axis blocking) and FC/APC connectors on pigtail ends. 5.0W (CW) max. optical input power.



Example 5: WLTF-NE-S-1550-110/0.35-SM-3.0/1.0-FC/APC-USB

Description: S-version fibre optic polarization-insensitive electrically tunable optical filter of 0.35nm FWHM (Gaussian-shape) bandwidth over 1495-1605 with 1M long, 3.0mm OD loose cabled SMF-28e fibre pigtails and FC/APC connectors on pigtail ends. 500mW (CW) max. optical input power and USB interface.

Example 6: WLTF-NE-S-1310-95/0.5-PM-FC/APC-USB

Description: S-version fibre optic polarization-sensitive electrically tunable optical filter of 0.50nm FWHM (Gaussian-shape) bandwidth over 1260-13nm tuning range with receptacle input and output for FC/APC connectors. Panda PM1300 operating fibre aligned in PM slow axes (fast-axis Blocking), 500mW (CW) max. optical input power and USB interface.

Example 7: WLTF-NE-S-1060-80/0.1-SM-0.9/1.0-00-SPI

Description: S-version fibre optic polarization-insensitive electrically tunable optical filter of 0.1nm FWHM (Gaussian-shape) bandwidth over 1020-1100nm tuning range with 1M long, 900µm OD loose cabled HI1060 fibre pigtails and no connectors on pigtail ends. 500mW (CW) max. optical input power and SPI digital control interface.

Example 8: WLTF-NE-S-1060-80/0.1-PM-0.9/1.0-00-USB-5.0

Description: S-version fibre optic polarization-sensitive electrically tunable optical filter of 0.1nm FWHM (Gaussian-shape) bandwidth over 1020-1100nm tuning range with 1M long, 900µm OD loose cabled Panda PM980 fibre pigtails aligned in PM slow axes (fast-axis blocking) and no connectors on pigtail ends. 5.0W (CW) max. optical input power and USB interface.

Customization

Besides the specifications above, other customizations in terms of operating band, transmission bandwidth, power handling, interface and foot print, or other type functionalities related to spectral manipulations are available, please ask our sales for solutions.