

# Terahertz generator and detector






- Efficient THz generation using optical rectification of femtosecond pump pulses
- Efficient THz generation using nonlinear optical difference frequency generation
- Optimized for pump wavelengths of 1.2–1.6  $\mu\text{m}$ ; 0.7–0.8  $\mu\text{m}$  available upon request
- Efficient electro-optic THz detector

## Specifications

Aperture	2, 3, 4 or 5 mm; others upon request
Damage Threshold	150 GW/cm <sup>2</sup> @150 fs pulse length
Photon conversion efficiency	$2 \cdot 10^{-4}$ /MW-peak-power

## THz Frequency Ranges for Generator Materials

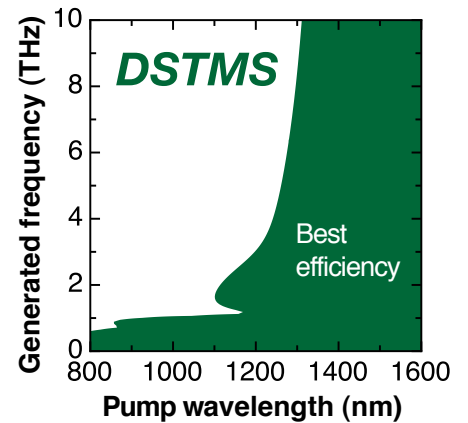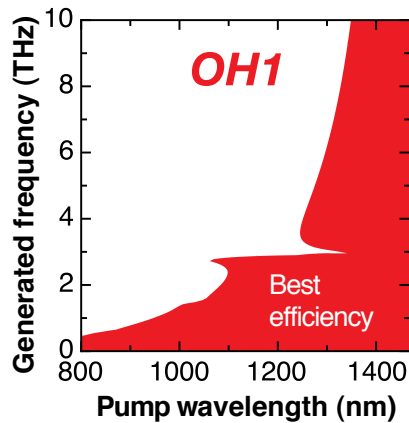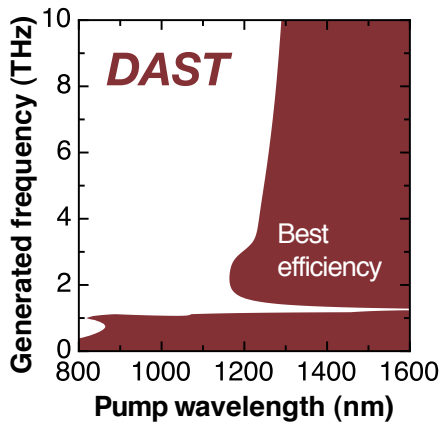



## Spectral Bandwidth (measured with Rainbow Photonics instruments)

Source/Detector: 0.45 mm DSTMS


$\lambda = 1560$  nm

Pump Pulse length: 65 fs

Energy/Pulse: 1.8 nJ, Average Power: 180 mW

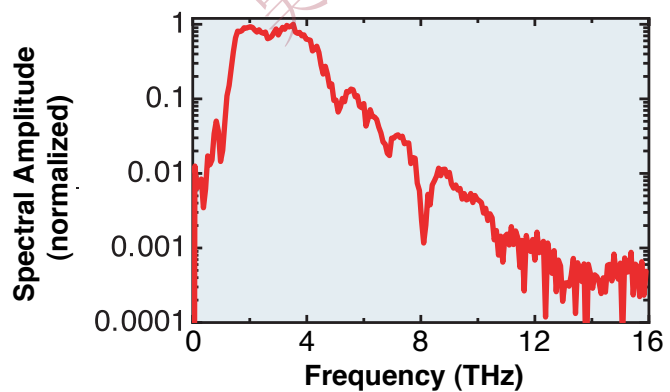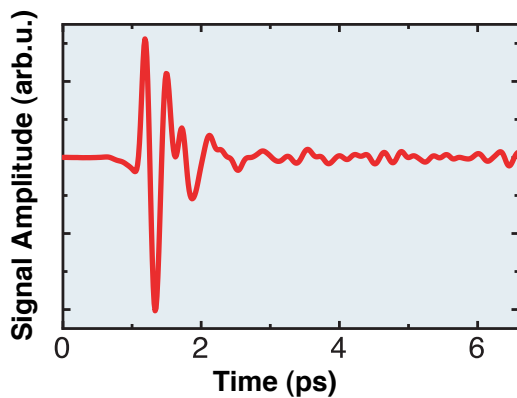

## THz Frequency Range for Different Pump-Pulse Lengths

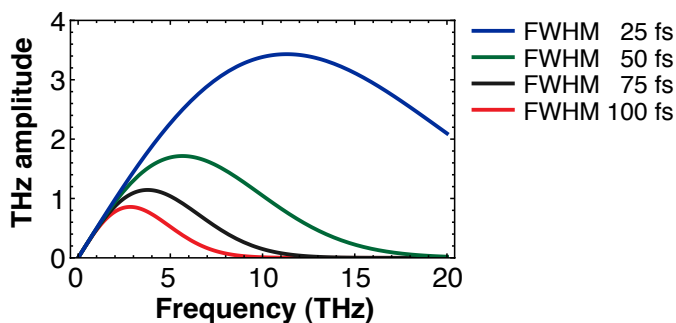

## References

- A. Schneider et al, Appl. Phys. Lett. 84, 2229 (2004).
- A. Schneider et al, J. Opt. Soc. Am B 23, 1822 (2006).
- F. Brunner et al, Opt. Express 16, 16496 (2008).
- M. Stillhart et al, J. Opt. Soc. Am B 25, 1914 (2008).

More information available upon request.

### Rainbow Photonics AG

Farbhofstrasse 21

CH-8048 Zürich

Phone: ++41 44 419 05 05

Fax: ++41 44 419 05 06

E-mail: [info@rainbowphotonics.com](mailto:info@rainbowphotonics.com)

Web: [www.rainbowphotonics.com](http://www.rainbowphotonics.com)

