


Kinetix

High Speed Imaging		Kinetix sCMOS Camera Datasheet		
Specifications	Camera Performance			
Sensor	Teledyne Photometrics Kinetix Sensor			
Active Array Size	3200 x 3200 (10.24 Megapixel)			
Pixel Area	6.5µm x 6.5µm (42.25µm ²)			
Sensor Area	20.8mm x 20.8mm 29.4mm diagonal			
Peak QE%	>95%			
Readout Mode	Rolling Shutter Effective Global Shutter Programmable Scan Mode			
Digital Binning	Symmetrical and Asymmetrical Binning up to 4x4 pixels			
Linearity	>99%			
Cooling Options	Air Cooled Liquid Cooled			
Camera Modes				
Specifications	Dynamic Range	Speed	Sensitivity (CMS)	Sub-Electron (8x CMS)
Bit-Depth	16-bit	8-bit	12-bit	16-bit
Frame Rate (Full Frame)	83 fps	498 fps	88 fps	5.2 fps
Read Noise	1.6e ⁻	2.0e ⁻	1.2e ⁻	0.7e ⁻
Cooling	0° C	0° C	0° C	0° C
Line Time	3.749 µsec/line	0.625 µsec/line	3.53125 µsec/line	60.1 µSec/line
Dark Current	1.27 e ⁻ /p/sec	3 e ⁻ /p/sec	1.03 e ⁻ /p/sec	0.477 e ⁻ /p/sec
Conversion Gain	0.23 e ⁻ /count	0.85 e ⁻ /count	0.25 e ⁻ /count	0.015 e ⁻ /count
Full Well Capacity	15000 e ⁻	200 e ⁻	3000 e ⁻	3000 e ⁻
Specification	Camera Interface			
Digital Interface	PCI-Express Gen 3 USB 3.2 10 Gbps			
Lens Interface	T-Mount F-Mount C-Mount Swappable Mounts			
Mounting Points	2x 1/4" mounting points per side			
Triggering Mode	Function			
Input Trigger Modes	Trigger First:	Sequence triggered on first rising edge		
	Level Trigger:	Exposure time is controlled by length of high trigger signal		
	Edge Trigger:	Each frame in sequence triggered by rising edge		
	SMART Streaming:	Fast iteration through multiple exposure times works with the 4 trigger outs to control multiple sources at multiple exposure time		
Output Trigger Modes	Any Row:	Expose signal is high while any row is acquiring data		
	First Row:	Expose signal is high while first row is acquiring data.		
	Line Output:	Expose signal provides rising edge for each row advanced by the rolling shutter readout		
Effective Global Shutter Trigger Modes	All Rows:	Expose out signal is high for Exposure time this keeps exposure time but drops frame rate		
	Rolling Shutter:	Expose out signal is high for Exposure time - readout time this keeps frame rate but drops exposure time		
Output Trigger Signals	Expose Out (up to four signals), Read Out, Trigger Ready			

Aunion Tech Co.,Ltd
 Floor 3, Building 6, No. 2007 Hongmei road, Shanghai 201103 P.R. China
 Tel: +86-21-51083793 Fax: +86-21-34241962
 E-Mail: info@auniontech.com Website: www.auniontech.com

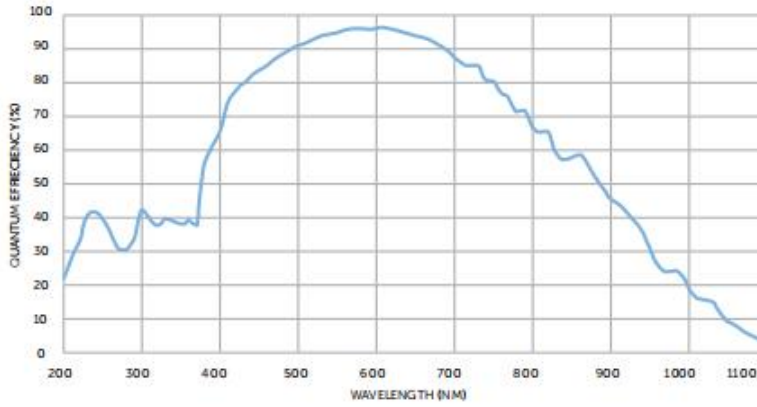

Accessories (Included)

- USB 3.2 Card/Cable
- Trigger Cable
- Power Supply
- Quickstart Guide
- PCIe Card/Cable

Accessories (Additional)

- Liquid Circulator
- Liquid Cooling Tubes

Array Size	Frame Rate							
	Dynamic Range		Speed		Sensitivity (CMS)		Sub-Electron	
	PCI-E	USB	PCI-E	USB	PCI-E	USB	PCI-E	USB
3200 x 3200	83	39	498	79	88	52	5.2	5.2
3200 x 2304	115	54	691	110	122	72	7.2	7.2
3200 x 2048	130	61	778	122	138	81	8.1	8.1
3200 x 1600	166	78	996	158	176	104	10.4	10.4

Array Size	Line Scan ROI Frame Rates in KHz			
	Dynamic Range	Speed	Sensitivity (CMS)	Sub-Electron
3200 x 64	4.1	21.1	4.3	0.2
3200 x 32	8.1	36.4	8.3	0.5
3200 x 16	15.7	57.1	15.7	0.8
3200 x 8	29.6	80.0	28.3	1.4
3200 x 4	53.3	99.4	47.2	2.1
3200 x 2	88.9	107.2	47.2	2.7

Based on measurement using PCIe interface on a Kinetix having firmware 30.32.1

Aunion Tech Co.,Ltd
 Floor 3, Building 6, No. 2007 Hongmei road, Shanghai 201103 P.R. China
 Tel: +86-21-51083793 Fax: +86-21-34241962
 E-Mail: info@auniontech.com Website: www.auniontech.com