

Thermal-Camera

Compact USB2.0 640x480 Pixel Microbolometer Camera System






Key Features:

- 640x480 Pixel
- Microbolometer
- 8-14 μ m
- 60 fps
- USB2.0
- Viewer Software

Optional:

- SDK
- Germanium Lens
f=15, 50, 100mm

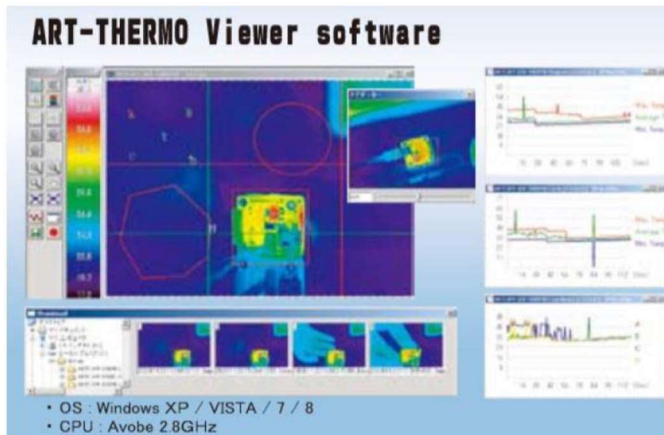

Aunion Tech Co.,Ltd

Floor 3, F Building, No. 86 Caobao road, Shanghai 200235 P.R. China

Tel: +86-21-51083793


Fax: +86-21-34241962

E-Mail: info@auniontech.com

Website: www.auniontech.com

Specifications:

Image Sensor	Uncooled Microbolometer (build in peltier device)
Resolution	640 x 480
Pixel Size (H x V) μm	23.5 x 23.5
Field of view f=50mm (optional lens)	17° (H) x 13° (V)
Temperature Accuracy	Max value of either +/-5% or +/-5°C of readings
Temperature Resolution	L Range <75mK / H Range <300mK
Thermal Time Constant	16ms (typ)
Output	14bit
Frame Rate	60 fps
Lens Mount	special
Operation Temperatur	20°C ~ 35°C
Power Source	12VDC
Power Consumption	<10W
Dimensions (WxHxD) mm	82.0 x 85.5 x 120.5 mm
Weight (without lens)	0.7 Kg

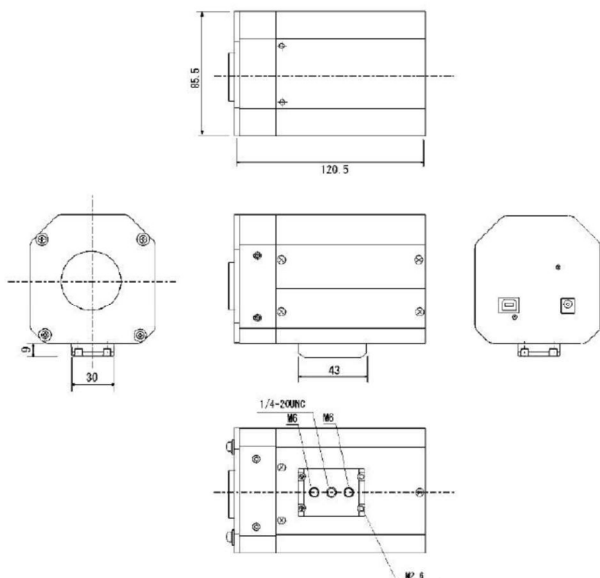

*Optional lens and lens mount are available upon request.

Aunion Tech Co.,Ltd

Floor 3, F Building, No. 86 Caobao road, Shanghai 200235 P.R. China

Tel: +86-21-51083793

Fax: +86-21-34241962

E-Mail: info@auniontech.com

Website: www.auniontech.com