

Picosecond Ultrafast Fiber Laser – *Passive Mode-locking*



Applications

- Amplifier seedin
- Materials characterization
- Diagnostics in biology and medicine
- Optical sampling
- Lidar

Features

- Narrow spectral bandwidth of 0.2 nm typical
- Wavelength selectable over 1 μm band
- Pulse width ~ 20 ps
- Average output power greater than 100 mW
- Linearly polarized output
- Transform-limited output
- Low timing jitter
- Minimal pulse pedestal


The 1 μm band picosecond ultrafast fiber laser is a passively mode-locked fiber laser that utilizes saturable absorbers to deliver narrow spectral bandwidth of typical 0.2 nm. The laser has excellent stability and reliability with turnkey operation. The wavelength is factory selectable throughout 1 μm band. The pulse width can be ~ 20 ps with near transform-limited pulse shape and a better than -20 dB pedestal. The timing jitter is as low as 100 fs. The repetition rate can be specified from 10 to 100 MHz with either a polarization-maintaining (PM) or non-PM fiber output. With > 100 mW output power, the picosecond laser is an ideal narrow bandwidth source for seeding applications. An RF synchronization output is provided as a trigger signal.

Technical Specifications

Model Number	FPLNB-02UFF
Pulse Width (ps)	5 ~ 20
Output Wavelength (nm)*	1030 ~ 1064 (selectable)
Output Spectral Bandwidth (nm)	< 0.5
Repetition Rate (MHz)	30
Output Power (mW)	> 5
Operating Temp (°C)	17 ~ 35
Operating Voltage (VAC)	85 ~ 264
Dimensions (cm)	34(w) x 40(d) x 9(h) benchtop or 18.5(w) x 12.7(d) x 6.5(h) module

* 780 nm band is available.

Due to our continuous improvement program, specifications are subject to change without notice.

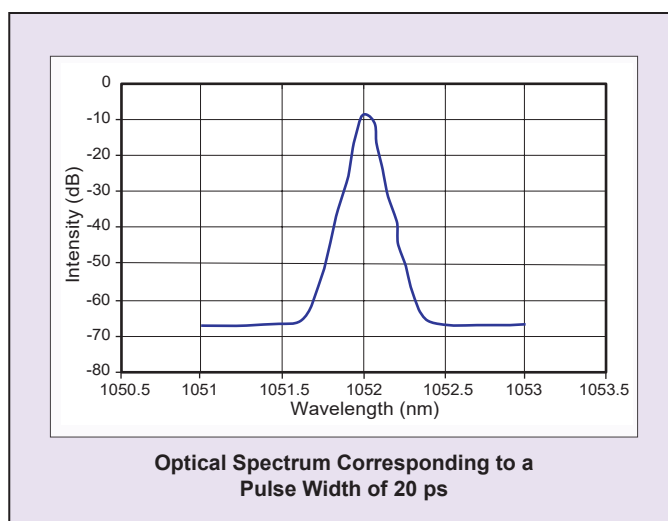

上海昊量光电设备有限公司

中国区代理

官网: www.auniontech.com 电话: 185 0177 0670

邮箱: jiabin-wei@auniontech.com

地址: 上海市徐汇区漕宝路 86 号光大会展中心 F 座 3 楼

