

ACCURION

solutions for science


HALCYONICS.i4

ACTIVE VIBRATION ISOLATION
DESKTOP UNIT



ACTIVE VIBRATION ISOLATION DESKTOP UNIT: **HALCYONICS_i4**

The halcyonics_i4 is a state-of-the-art active benchtop vibration isolation system from Accurion. Aside from its low-profile carbon design, the i4 has expanded application capabilities. Main features are the automated transport locking mode and fully automatic load adjustment which makes the handling extremely straightforward.

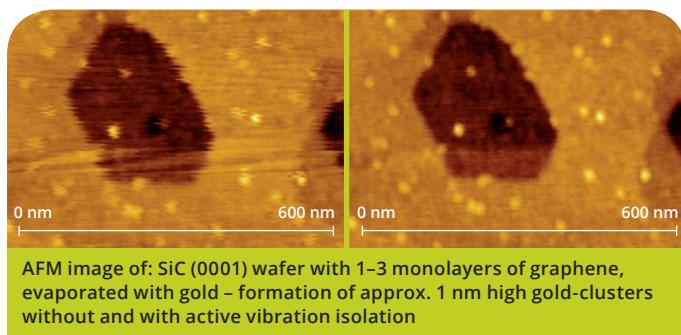

AFM image of: SiC (0001) wafer with 1-3 monolayers of graphene, evaporated with gold – formation of approx. 1 nm high gold-clusters without and with active vibration isolation

It takes only a few seconds to start up the halcyonics_i4. No adjusting or tuning is required. The control panel is self-explanatory and the entire system is controlled by only three buttons. This enables the user to completely concentrate on the application.

Because of its slim dimensions and broad load range, the halcyonics_i4 is a multifunctional active vibration isolation system for a variety of applications. This allows you flexibility for future applications with just one model – **the halcyonics_i4**.

One accessory to our active vibration isolation systems are specially designed welded support frames. These frames feature a high horizontal and vertical stiffness and are the ideal basis for the optimal isolation performance of our systems. Different sizes of support frames are available to meet the requirements of our customers.



ACCESSORIES AND OPTIONS

- Steel support frame
- Acoustic enclosure
- Metric mounting holes in top plate (M6 tapped holes on 25 mm centers)
- Imperial mounting holes in top plate (1/4"-20 tapped holes on 1" centers)

SELECTED APPLICATIONS



■ Halcyonics_i4 with JPK AFM




■ GBS smartWLI on halcyonics_i4



■ Opto CylinderInspector on halcyonics_i4


i4

400 × 500 × 90 mm
15.7" × 19.7" × 3.5"

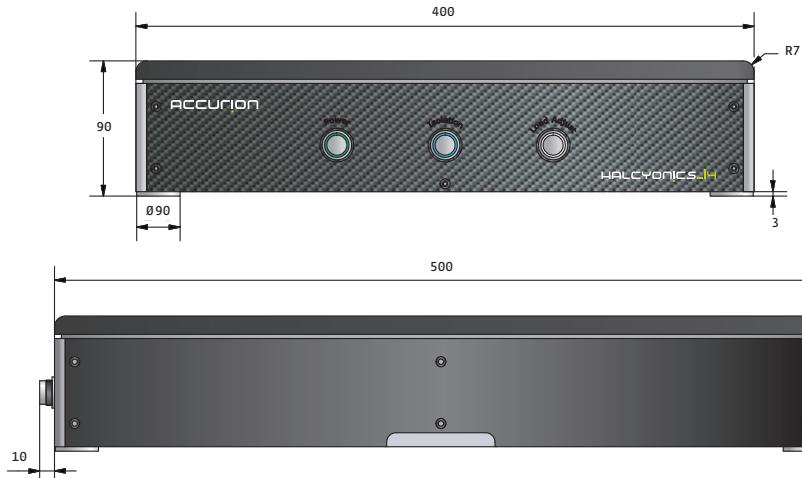


i4MEDIUM


600 × 600 × 90 mm
23.6" × 23.6" × 3.5"

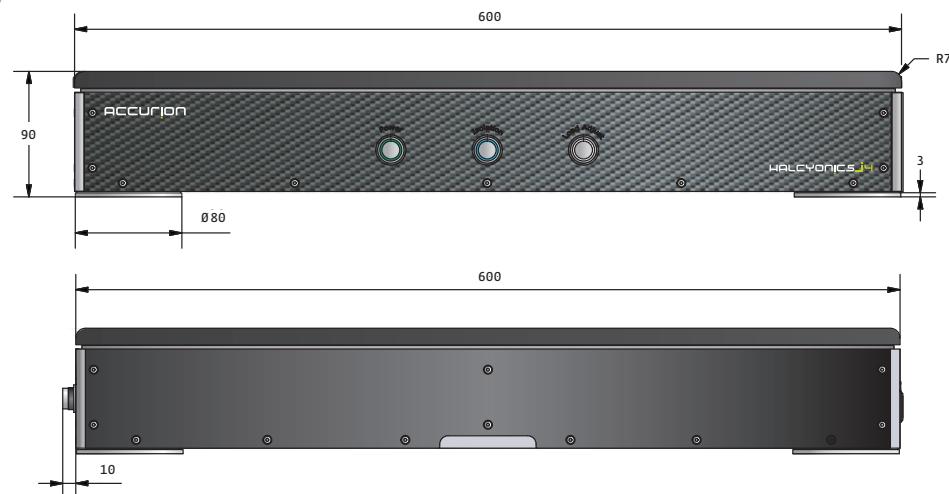

i4LARGE


550 × 700 × 92 mm
21.7" × 27.6" × 3.6"

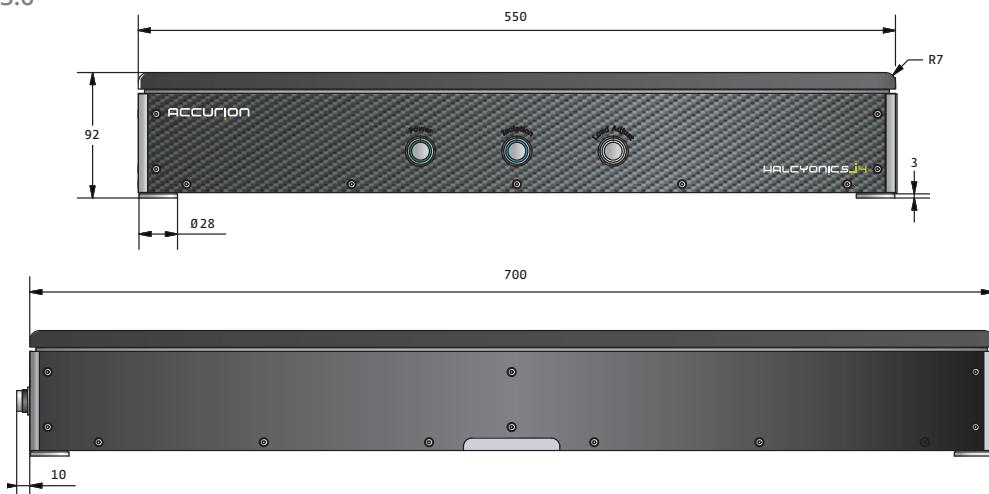

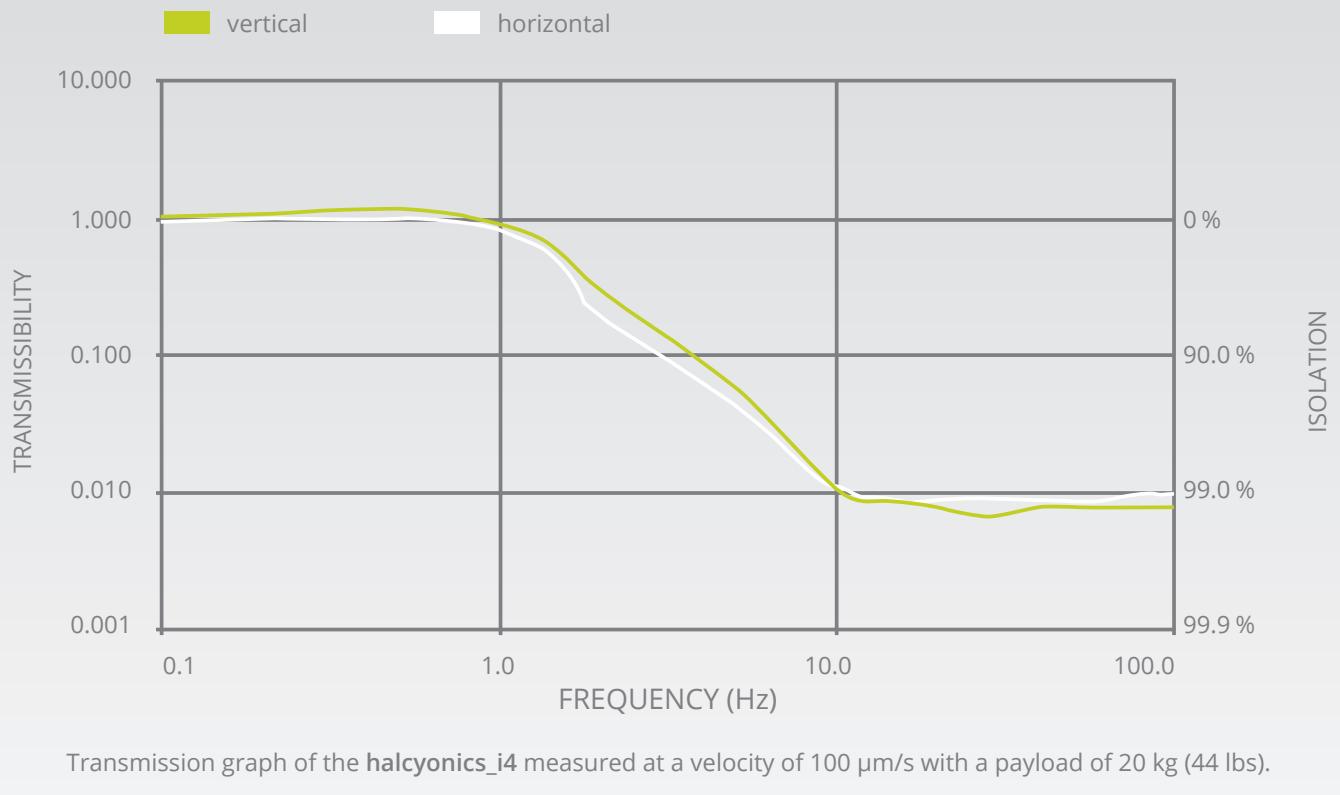

KEY FEATURES:

- Isolation in all six degrees of freedom.
- Active vibration isolation starts at 0.6 Hz (passive isolation above 200 Hz).
- Automatic load adjustment and transportation lock.
- Settling time only 0.3 s.

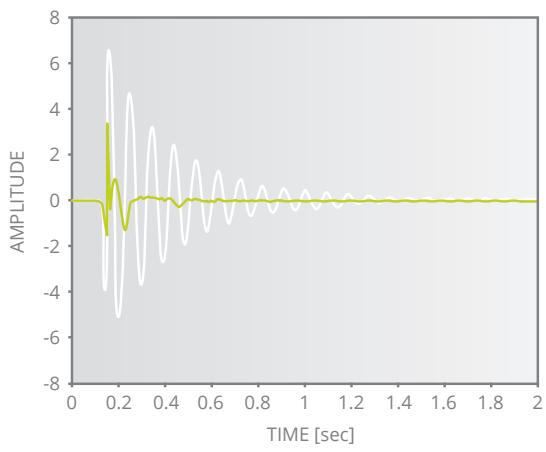

- AC power from an electrical outlet is sufficient; no compressed air supply is needed.
- No natural low frequency resonance and, as a result, excellent vibration characteristics also in frequency ranges below 5 Hz.
- Excellent position stability – inherent stiffness typically 20 – 30 times higher than that of a 1 Hz passive isolator.
- Exceptionally compact dimensions.
- Two-year warranty.
- Long term tests and quality control procedures.



SPECIFICATIONS	i4	i4MEDIUM	i4LARGE			
Dimensions	400 × 500 × 90 mm 15.7 × 19.7 × 3.5 inch	600 × 600 × 90 mm 23.6 × 23.6 × 3.5 inch	550 × 700 × 92 mm 21.7 × 27.6 × 3.6 inch			
Load capacity	0 – 120 kg / 0 – 265 lbs	0 – 105 kg / 0 – 232 lbs or 40 – 150 kg / 88 – 331 lbs	0 – 105 kg / 0 – 232 lbs or 40 – 150 kg / 88 – 331 lbs			
Weight	20 kg / 44 lbs	37 kg / 82 lbs	40 kg / 88 lbs			
Isolation technology	Halcyonics control technology based on piezoelectric type acceleration pickup, fast signal processing and electro-dynamic force transducers.					
Force directions	Active compensation in all six degrees of freedom.					
Isolation performance	> 5 Hz = 25 dB (94.4 %) > 10 Hz = 40 dB (99.0 %)					
Active bandwidth	0.6 – 200 Hz* (passive isolation beyond 200 Hz)					
Settling time	300 ms**					
Response time	0.5 ms**					
Stroke of the actuator	1 mm					
Max. correction forces	Vertical ± 8 N Horizontal ± 4 N					
Max. compensation level	500 µm / sec. at 6 Hz and 60 kg / 132 lbs**					
Repeatability of load adjustment	120 µm					
Table top material	Powder coated aluminum					
Top plate surface flatness	± 0.10 mm over complete surface					
Environmental and operational requirements	Electrical voltage: 100 – 240 V / 47 – 63 Hz Power consumption: Typically 40 – 45 W Operating temperature: 15 – 40 °C / 59 – 104 °F Relative humidity: 0 – 60 % Operating altitude: < 2,500 m / 8,100 ft					
Electrical safety	CE certified according to directive 2006/95/EC					
EMC	CE certified according to directive 2004/108/EC					
*The low-pass characteristics of the spring-mass combination dominate the dynamic behavior of the isolation system above 200 Hz. The part of the active isolation decreases with increasing frequency.						
**The settling time and maximum compensation level depend on several conditions such as payload, frequency and load distribution. The mentioned settling time value is exemplary for a centric load of 80 kg. The settling time defines the time until an incoming vibration is compensated.						
***The response time determines when the system starts to actively isolate an incoming vibration after detection by the sensors.						

Errors and omissions excepted.

HEADQUARTERS GOETTINGEN, GERMANY

Accurion GmbH
Stresemannstrasse 30
37079 Goettingen, Germany

Phone: +49(0)551.999 60.0
Fax: +49(0)551.999 60.10
E-Mail: info@accurion.com
Web: www.accurion.com

NORTH AMERICA

Accurion, Inc.
20045 Stevens Creek Blvd., Suite 2E
Cupertino, CA 95014, USA

Phone/Fax: (+1)408.642.1446
E-Mail: info@accurion.com
Web: www.accurion.com

INDIA

Accurion Scientific Instruments Pvt. Ltd
Flat 402, WING 2, Balaji Lakeside Marvel
#1413/2A, 7th Cross, 1st Main road
BHCS layout, Uttarahalli
Bangalore 560061, India

Phone: +91-[0]98.450.04273
E-Mail: sharma@accurion.com
Web: www.accurion.com

CHINA

Accurion Scientific Instruments (Shanghai) Co. Ltd.
Rm. 502, Xuhui Commercial Building,
No. 168, Yude Road
Xuhui District
Shanghai 200030, China

Phone: +86-(0)21.5017.9099
E-Mail: fz@accurion.cn
Web: www.accurion.com.cn