



MProbe® NIR

Thin Film Measurement System

It is easy to be an expert with MProbe

Spectroscopic Reflectance and/or Transmittance measurement in NIR (900nm -1700nm) allows to analyze applications that are optically opaque at visible or UV wavelengths. Solar cells absorbers (e.g. CIGS, CdTe), rough surface interfaces, other light scattering applications (high haze polymer web, layer with nanoparticles), dyed polymers, Si,Ge and many other application can be measured quickly and reliably. MProbe NIRHR (1500 nm -1550 nm) enables measurement of thick films and wafers (Quartz, Ge, Si).

Thickness Range: 50 nm - 1800 μm
Wavelength Range: 900nm -1700 nm /1500-1550nm


Real time measurement and analysis. Multi-layer, thin, thick, freestanding and nonuniform layers.

Extensive materials library (500+ materials) - new materials easily added. Support of parameterized materials: Cauchy, Tauc-Lorentz, Cody-Lorentz, EMA and many more....


Flexible: Desktop or in-situ, R&D or inline. Easy integration with external system using TCP Modbus interface

Measurement: thickness, optical constants

User friendly and powerful: One-click measurement and analysis. Powerful tools: simulation & sensitivity, background and scaling correction, linked layers and materials, multisample measurements, dynamic measurement and production batch processing.

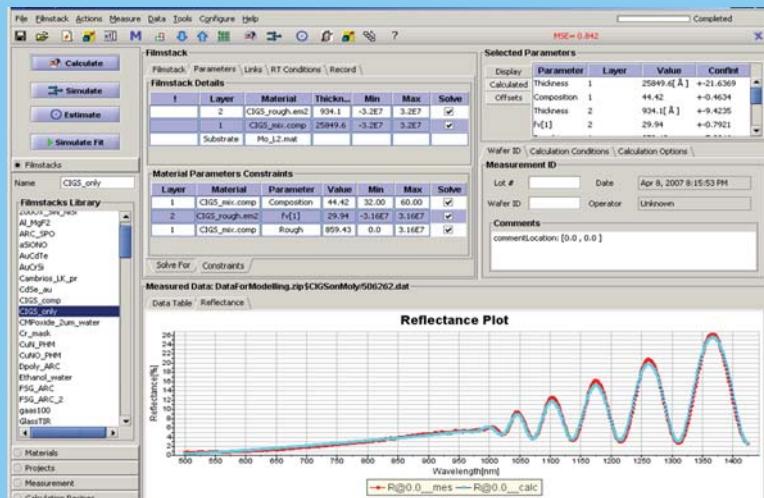

CIGS measurement: thickness and composition.
Oscillations indicate transparency in NIR

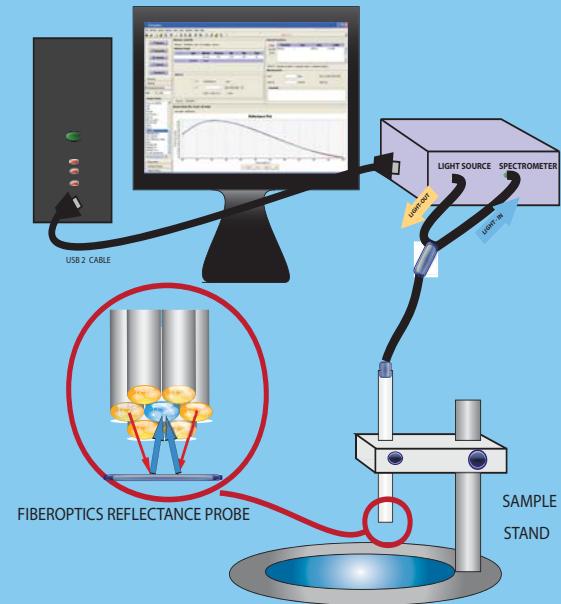

MProbe system diagram

Precision	0.01%
Accuracy	0.2%
Stability	0.03%
Spot Size	0.5 mm
Sample Size	from 10 mm



MProbe system (desktop configuration)

Specification

MProbe NIR HR

MProbe NIR


Spectral range (nm)	1500-1550	Spectral range (nm)	900-1700
Spectrometer/detector	F4 spectrometer 512 pixels InGaAs PDA, 16 bit ADC, TE cooled detector. High-sensitivity and high-dynamic range modes. S/N >6000	Spectrometer/detector	F4 spectrometer 512 pixels InGaAs PDA, 16 bit ADC, TE cooled detector. High-sensitivity and high-dynamic range modes. S/N >6000
Wavelength resolution	<0.3 nm	Wavelength resolution	<3.5 nm
Thickness range	10 μm-1800 μm (quartz) 4 μm- 500 μm (Si)	Thickness range	50 nm-150 μm (quartz) 100 nm- 30 μm (Si)
Light source	5 W Tungsten-halogen lamp (Xe filled), CT 2800° Lifetime: 10000 hrs	Light source	5 W Tungsten-halogen lamp (Xe filled), CT 2800° Lifetime: 10000 hrs
Reflectance probe	Fiberoptics (7 fibers assembly), 400μm fiber core	Reflectance probe	Fiberoptics (7 fibers assembly), 400μm fiber core
Precision	0.01%	Precision	0.01%
Accuracy	<0.2%	Accuracy	<0.2%
Weight (main unit)	7 kg	Weight (main unit)	7 kg
Size (main unit)	8"x 12" x 4" (WxDxH)	Size (main unit)	8"x 12" x 4" (WxDxH)
Power	100-250VAC, 50/60 Hz 20W	Power	100-250VAC, 50/60 Hz 20W

Options

-MOD	remote control (TCP) based on Modbus protocol
- KM	kinetic measurement with specified number of measurement and/or delay between them
-FD	SH200A upgrade for measurement of foils, transparent and flexible samples
-TO	Transmittance option
-SLD	20mW SLD fro NIRHR system, replaces 5W TH lamp

Included in the Box:

1. Main unit (spectrometer/light source/electronics)
2. ReflectanceprobeVisNIR
3. Sample Holder SH200A with VisACH focusing lens
4. Calibration set
5. TFC companion -RA software
6. Power adapter and USB cable

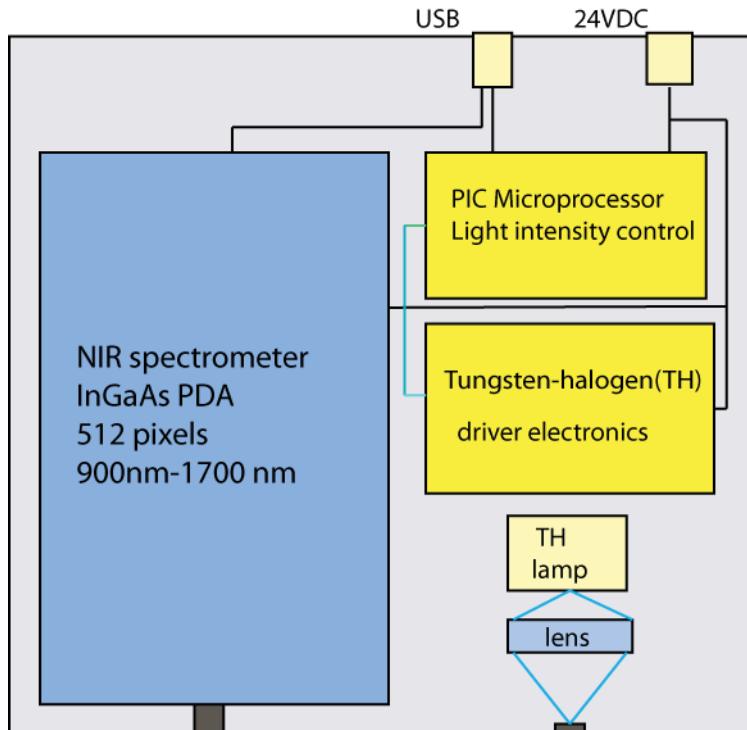

上海昊量光电设备有限公司

中国区代理

官网: www.auniontech.com 电话: 021-34241961

邮箱: info@auniontech.com

地址: 上海市徐汇区漕宝路 86 号光大会展中心 F 座 3 楼