




Polarization Maintaining PCF Fiber



Product reference	P-PMCF-6-80
Cladding diameter (µm)	80 (+/- 0.5 µm)*
Core diameter (µm)	7.5 (+/- 0.3 µm)*
Mode Field Diameter @ 1550 nm	5 & 8 +/- 0.5 µm (Slow & fast axis)
Core material	F300 silica
Coating diameter (µm)	170 (+/- 5 µm)
Coating material (µm)	Dual coat acrylate
Background losses (dB/km) @1310 nm	< 5
Background losses (dB/km) @1550 nm	< 2.5
Group Birefringence @ 1550 nm	> 3.0x10 ⁻⁴
Key features	
Low losses, radiation hard pure silica core	
Applications	
Fiber gyroscope, PM pigtailling	

*Other dimension available on request

Typical Loss Spectrum

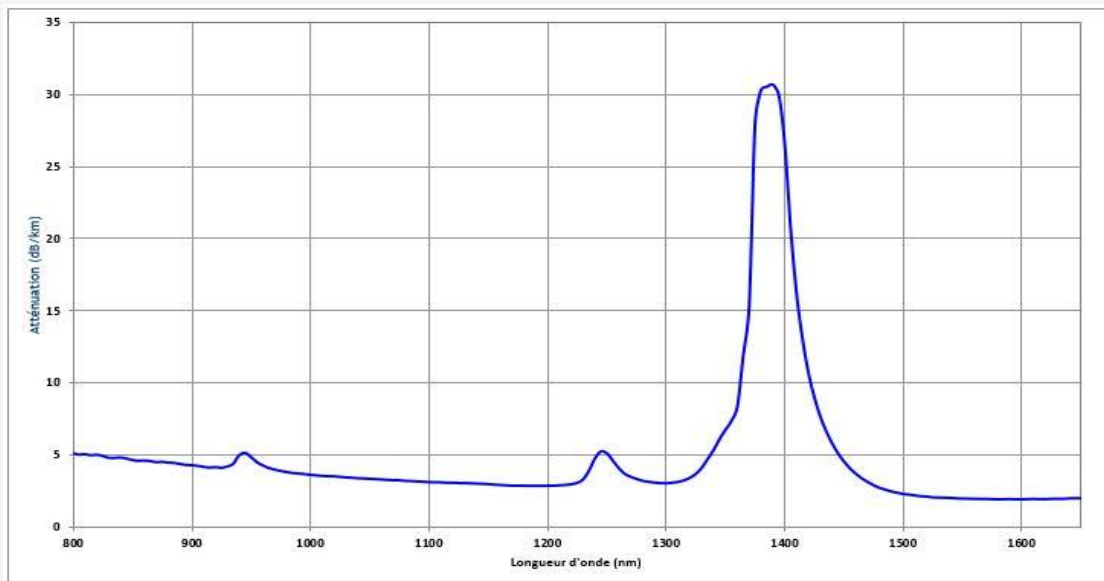

PERFOS
 4, rue Louis de Broglie 22300 Lannion (France)
 Phone 33 (0)2 96 48 58 89
 Fax 33 (0)2 96 48 79 81
www.perfos.com