


EasyQCL-1000 :

High-Power Terahertz Quantum Cascade Laser System


LONGWAVE PHOTONICS

The EasyQCL-1000 system is our latest generation of turnkey terahertz Quantum Cascade Laser source, offering average power levels of up to 20 mW* thanks to the more powerful Pulse Tube cryocooler. The system is configurable with a wide range of QCLs emitting at discrete frequencies between 1.9 and 5 THz in CW/pulsed and single/multimode. Multiple QCLs can be mounted in the same cooler (Multi-QCL option), and is available on request.

- ❑ The **EasyQCL-1000** system Includes:
 - QCL laser diode module
 - Closed cycle single stage Pulse Tube Cryocooler
 - QCL drive electronics capable of pulsed or continuous wave operation (<0.4 μ s up to DC)
 - All necessary accessories for turnkey operation
- ❑ A variety of user interchangeable QCL modules are available:
 - 10's of Milli-watt average power levels
 - Continuous wave operation available at select frequencies
 - Choice of center frequencies ranging from 1.9 to 5 THz
 - Multimode operation
 - Single mode DFB output at select frequencies
- ❑ The **EasyQCL-1000** system is designed for ease of use:
 - Cryogen free – laser diode cooling is by closed cycle refrigeration
 - No optical alignment
 - Cooler is maintenance free
 - Main system is tabletop compact and operates on 240 V single phase power source
- ❑ Applications:
 - High power Illumination source for focal plane arrays
 - Noise and responsivity Characterization of detectors
 - Local oscillator to pump Schottky-diode mixers for heterodyne detection

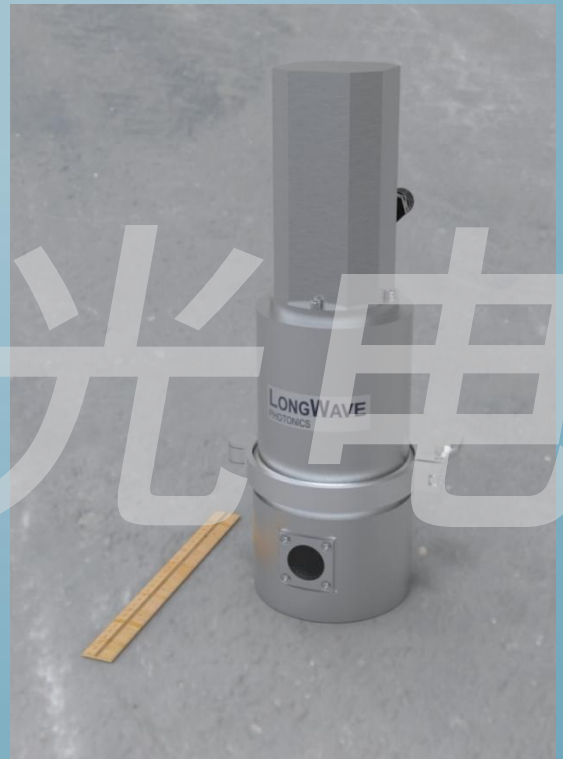

EasyQCL-1000 Main body
(with compressor detached)

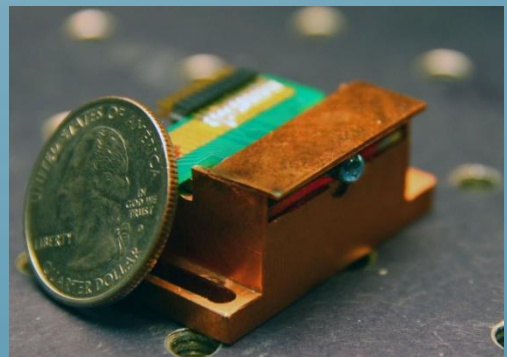

THz QCL Submount

Data Sheet

EasyQCL-1000 Technical Data

Included Components:

- QCL device(s) characterized for wavelength, output power, beam divergence and current versus voltage
- Vacuum chamber with electrical feedthroughs and vacuum gauge
- Liquid/Air cooled, Pulse-Tube cryocooler
- LWP-PS2 pulsed laser driver or DC power supply (for CW operation)
- Compact rotary vane vacuum pump
- Laptop PC with software for control of the driver and cryocooler

QCL Characteristics:

- Multimode and single mode laser diodes available.
- Beam divergence from 5 to 35 degrees FWHM
- Select devices operable in continuous wave

LWP-PS2 Laser Driver Specifications:

QCL Driver Electronics (FPO typical values):

Current:	Up to 2 A
Voltage:	Up to 100 V
Pulsed width:	0.2 μ s up to DC
Frequency:	100 Hz to 100 KHz
Triggering:	TTL Internal/External Gate BNC connector
Interface:	USB
Compatibility:	Windows 7/8.1
Software Options:	Laser bias current/voltage, pulse width, duty cycle and trigger source (internal external)
AC voltage range:	100 - 125 / 200 - 240 V
Rated frequency:	50 - 60 Hz
Rated Current:	120 V/5 A – 240 V/ 2.5 A
Interface/Control:	USB

Pulse-Tube Cryocooler Specifications:

- Room Temperature, no cryogenes.
- Cooldown time < 30 min to ~50 K
- Maintenance: Cold head requires periodic vacuum purge to $\sim 10^{-2}$ mbar with provided compact vacuum pump (e.g. Edwards E2M0.7 or similar). No turbo pumping required.

AC voltage range:	200VAC / 208-230VAC
Rated frequency:	50 / 60 Hz
Rated Power Consumption:	3.5 kW / 4.2 kW
Operating modes:	Open Loop (Close Loop Temperature Control Package available on request)

Warranty


- One year parts and labor
- First compressor maintenance: 15,000 Hours

Dimensions

Cooler:	approx 7 x 7 x 21 in (17 x 17 x 52 cm)
Compressor:	20 x 22 x 22 in (50 x 56 x 56 cm)

Weight:


Cooler :	~10 kg
Compressor:	~80 kg

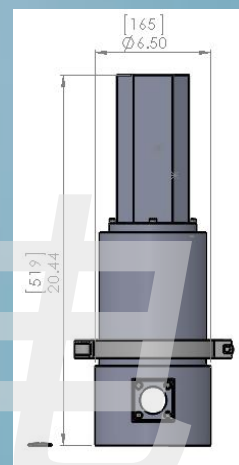


Approximate Dimensions in inches [mm]

Applications

Illumination source for THz imaging

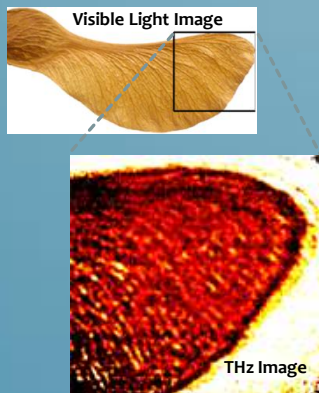


High Quality Beam for pumping heterodyne mixer



Beam focused using f/1 dia/25 mm High Resistivity Silicon Lens onto NEC IRV-T0831 Focal Plane Array

Single Mode Radiations for High Resolution Spectroscopy

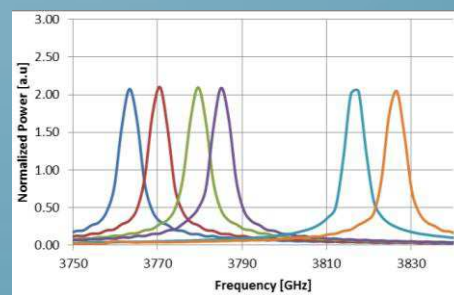

LongWave Photonics LLC
958 San Leandro Ave Ste 300
Mountain View, CA 94043

Tel: (617)-399-6405 Fax: (617)-399-6406
info@longwavephotonics.com

Copyright ©
LongWave Photonics LLC, 2014

上海美光光电设备有限公司 Phone: 4006-888-532 WeChat: Auniontech Website: www.auniontech.com E-mail: info@auniontech.com