

TeraKit®

The flexible solution for THz spectroscopy

The **TeraKit®** provides a flexible solution for laboratory THz spectroscopy. It is based on organic crystals, to allow access to terahertz frequencies not available with conventional antennas. The **TeraKit®** includes all optical, mechanical and electronic components for the generation and detection of THz waves such as delay line, terahertz generator, terahertz detector, optics, electronics, dedicated software and laptop.


It can be used with any femtosecond laser source at telecom wavelengths.



TeraKit® optical board (38 cm x 38 cm)

TeraKit® Specifications	
THz generator / detector	Organic crystal
Spectral range	1–14 THz (with ~50 fs pump laser)
Best phase matchable wavelength	1300–1600 nm
Requirements	
<i>External femtosecond laser source</i>	
Options	
<ul style="list-style-type: none"> ◆ THz imaging with a scanning range of 50x50 mm² or 100x100 mm² ◆ TeraKit® including pump laser source A or B (see next page) 	

Terahertz spectral bandwidth as a function of the pump pulse length and frequency domain spectrum measured in dry air with the **TeraKit[®]** using DSTMS as terahertz generator and detector and pump laser A:

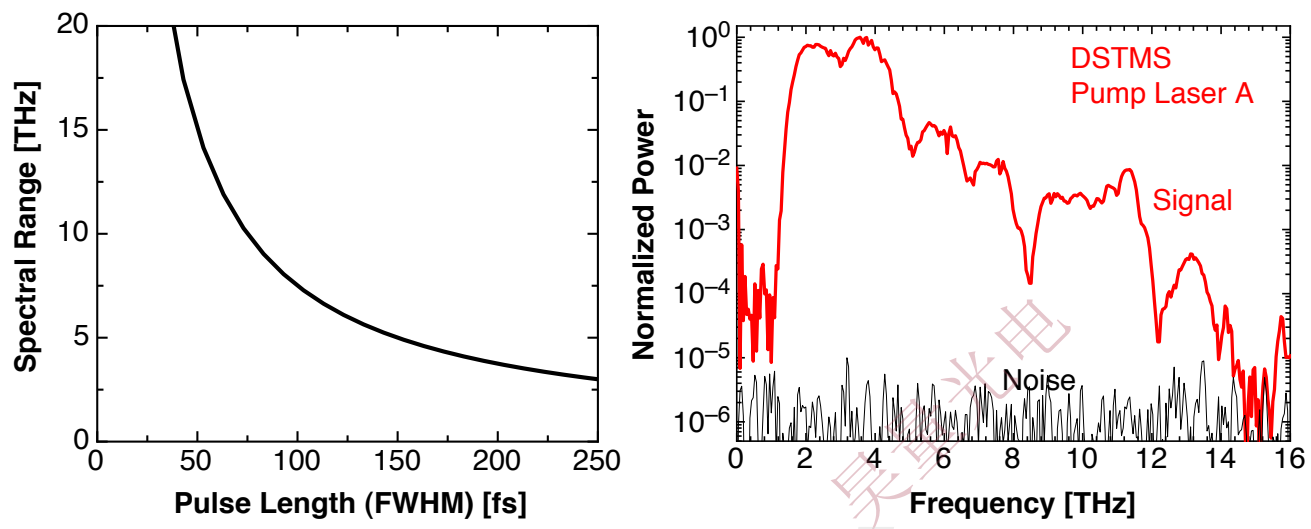

Pump source	A	B
Spectral range	1–14 THz	1–10 THz
Dynamic range	> 50 dB	> 70 dB
Scan range	up to 60 ps	up to 60 ps
Pulse length	< 50 fs	< 80 fs
Total average power	> 120 mW	> 350 mW
Central wavelength	1565 nm	1565 nm
Repetition rate	100 MHz	40 MHz/80 MHz

Other spectral ranges are available upon request.

Rainbow Photonics AG
 Farbhofstrasse 21
 CH-8048 Zürich

Phone: +41 44 419 05 05
 Fax: +41 44 419 05 06
 E-mail: info@rainbowphotonics.com
 Web: www.rainbowphotonics.com

