

DIADEM SERIES

上海昊量光电设备有限公司

独家代理

官网: www.auniontech.com 电话: 185 0177 0670

邮箱: jiabin-wei@auniontech.com

地址: 上海市徐汇区漕宝路 86 号光大会展中心 F 座 3 楼



<400 FS / SINGLE SHOT TO 1 MHZ / UP TO 30W AT 1030 NM

COMPACT HIGH-ENERGY FEMTOSECOND LASER FOR MICROMACHINING

DIADEM is a very compact, high energy ultrafast laser for advanced micro-machining applications needing short femtosecond pulse widths, which offers over 40 μ J at 30W and up to 1MHz (standard), with pulses below <400 fs from single shot to 1 MHz and a remarkable beam quality with $M^2 < 1.2$.

DIADEM laser series combine the most advanced electronics for on-the-fly pulse control and uncomparable ergonomics with a compact design and a less than 5 minutes set-up time.

This laser has been especially conceived for demanding medical implantable device and electronics manufacturing.

CORE SPECIFICATIONS

- / High power : up to 30W at 1030 nm
- / High repetition rate : < 400 fs pulses
- / High energy : 40 μ J up to 750 kHz

USABILITY

- / Compact, robust & air cooled fiber laser
- / Plug'n play : < 5 min set up
- / Intuitive User Interface (on the fly)
- / Smart electronics with sync. out / sync. in

APPLICATIONS


- / Consumer electronics & Semi-conductors
- / Luxury and watch industry
- / Medical & biomedical implantable devices

CUSTOMER CARE


- / 24-month warranty
- / Worldwide technical support

TECHNICAL SPECIFICATIONS*


	DIADEM IR-10	DIADEM IR-20	DIADEM IR-30
WAVELENGTH		1030 nm	
SPECTRAL LINEWIDTH		< 8 nm	
PULSE DURATION		< 400 fs	
PULSE ENERGY	10 μ J up to 1 MHz	30 μ J up to 700 MHz	40 μ J up to 750 MHz
REPETITION RATE	Single pulse to 1 MHz (with burst mode) – 5 MHz optional		
M ²		<1.2	
BEAM WAIST DIAMETER		2 mm	
BEAM DIVERGENCE		<1 mrad	
BEAM POINTING		<25 μ rad/°C	
ELLIPTICITY		> 0.85	
WARM-UP TIME		< 15 min	
POWER STABILITY		<2% RMS	
PULSE STABILITY		<2% RMS	
POLARIZATION		Linear, >100:1	
ELECTRICAL			
EXTERNAL INTERFACES	High speed External synchronisation (Sync. Out / In), Communication through USB, RS 232, TCP/IP		
SOFTWARE INTERFACES	Intuitive GUI, Serial communication Protocol		
POWER CONSUMPTION	100 to 240 VAC < 400 W		
MECHANICAL			
LASER HEAD DIMENSIONS (mm) WEIGHT	531 x 342 x 143 – 17 kg		
LASER CONTROLLER DIMENSIONS	19"/3U rack - 7.5 kg		
STANDARD UMBILICAL LENGTH	3 m		
TECHNICAL DRAWINGS FOR DOWNLOAD	DIADEM / DIADEM + MODULE		
COOLING	Air cooled		
OPTIONS			
FIBER DELIVERY MODULE	Fiber delivery coupling module with hollow core fiber (3 m long)		
ULTRA SYNC	low timing jitter for ultra accurate on-demand pulse triggering		
TUNABLE PULSE DURATION	from < 400 fs up to 10ps		
EXTERNAL MODULE	Possibility to convert in the harmonics and electronically switch thanks to an external module (IR/GR or IR/GR/UV)		
PERFORMANCE			

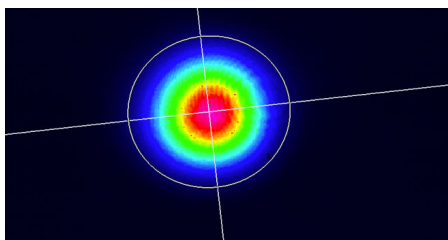

BEAM PROFILE



PULSE ENERGY VS REPETITION RATE

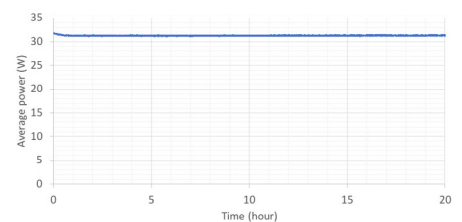

AVERAGE POWER STABILITY

* This information is subject to modifications without prior notice.

