

## Model 4250 VNIR

*Setting the standard in intelligent hyperspectral imaging*



### HIGHLIGHTS

- » High spatial and spectral resolution
- » Real-time imaging and classification
- » VIS-NIR (400 – 1000 nm)
- » Up to 300 spectral bands
- » 4 nm (FWHM)
- » Sensor Spatial Resolution - 2.3 MP
- » < 1 nm repeatability
- » Lens interchangeability

The HinaLea® 4250 system represents the next generation of intelligent hyperspectral imagers. Based on front-staring Fabry-Pérot technology, the 4250 includes the hardware and software required to support a broad range of hyperspectral imaging applications. Whether you are working in the field, laboratory or a production facility, the 4250 sets the standard in performance, portability and application versatility.

Based on patented Fabry-Pérot interferometer technology, the 4250 model does not require mechanical scanning of the instrument. In this technique, a tunable filter that can sequentially select spectral bands is placed in front of the sensor and generates the hyper-spectral cube by collecting complete images at each spectral band-pass. The major features and benefits of the 4250 system include:

- **Speed of acquisition:** One of the unique attributes of the 4250 system is its wavelength selectivity which can be dynamically controlled based on the application and object to be imaged. The system allows a range of operational modes from high spectral resolution static image capture with hundreds of bands to real-time and even video rate image capture and classification with a few band-passes of interest in a multi-spectral configuration
- **Complete solution:** At HinaLea, our goal is to develop intelligent imaging solutions to customer problems. As such, our systems include application software for not only acquisition but also image exploration and classification. Easy to use tools allow the easy and intuitive application of sophisticated segmentation algorithms that are presented immediately to the user.
- **High resolution:** The 4250 model offers high spectral and spatial resolution without the image uniformity challenges that line-scanning hyperspectral and patterned-filter snapshot multi-spectral imagers present.
- **Application flexibility:** Front-staring systems offer other advantages over line-scanning technologies for environmental monitoring applications, most notably more versatile viewing geometry options. Such systems can not only be mounted statically, but they can also be used by field operators or mounted on airborne platforms and land vehicles.
- **Cost:** HinaLea's systems are designed with mass manufacturability in mind. As such, our systems typically cost a fraction of competitive solutions with similar levels of performance

## HINALEA ADVANTAGES

### » Staring Hyperspectral Imaging

No mechanical scanning is required, resulting in a lower-cost, reliable system that produces more uniform images.

### » Off-Sensor Spectral Filtering

Decoupling the spectral filtering from the image sensor means not compromising one for the other and enables both high spatial and spectral resolution

### » True Hyperspectral Imaging

Unlike color-filter arrays, with the HinaLea® solution, there is no tradeoff between number of spectral bands and effective spatial resolution.

### » Customizable

HinaLea will work with strategic partners to optimize camera performance for specific applications and will consider OEM models.

## 4250 System Technical Specifications

### Mechanical

<b>Dimensions (LxWxH)</b>	197.7mm (7.78") x 81mm (3.19") x 78mm (3.07") 15° FOV lenses add 45.5mm (1.79") when focused at infinity (see below) 30° FOV lenses add 130.7mm (5.15") when focused at infinity (see below)
<b>Mass (Weight)</b>	1.25 kg (2.75 lbs.)

### Electrical

<b>Input Voltage</b>	110 VAC at 60Hz / 220 VAC at 50Hz
<b>Data Interfaces</b>	USB 2.0, 3.0

### Environmental


<b>Operating Temperature</b>	20°C ± 5°C
<b>Humidity</b>	65% non-condensing

### Scan Performance

<b>Standard Lens</b>	15° Field of View (FOV) – 150 mm to ∞ 30° Field of View (FOV) – 150 mm to ∞
<b>Sensor Spatial Resolution</b>	2.3 MP*
<b>Spectral Range</b>	400 – 1,000 nm
<b>Spectral Bands</b>	300 nominal
<b>Spectral Resolution</b>	4 nm (FWHM)
<b>Dynamic Range</b>	User selectable 8 or 16 bit
<b>Spatial Resolution</b>	2.3 MP with demosaicing
<b>Illumination</b>	Optional

\* RRGB sensor; effective monochromatic equivalent 588,544 pixels without demosaicing

## Application Software

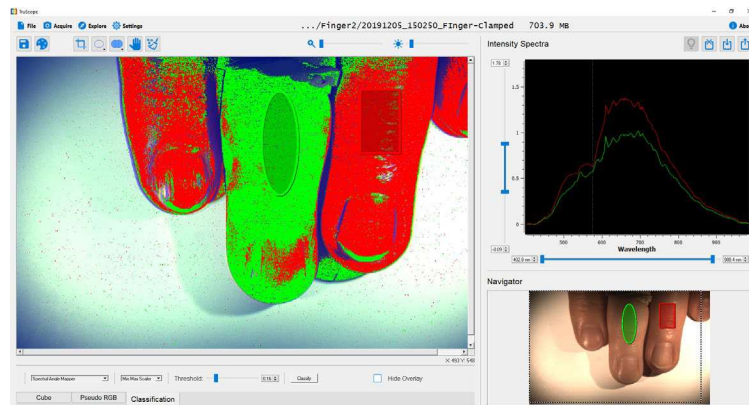

The 4250 system includes proprietary application software featuring fast and easy hyper-cube capture and intuitive image classification/segmentation as part of a suite of powerful spectral image exploration tools.

上海昊量光电设备有限公司

上海市徐汇区虹梅路2007号上海

远中产业园三期6号楼3楼

电话: 15618011391


网站: [www.auniontech.com](http://www.auniontech.com) 有限公司

Phone: 4006-888-532 WeChat: Auniontech Website: [www.auniontech.com](http://www.auniontech.com) E-mail: [info@ auniontech.com](mailto:info@ auniontech.com)

**HinaLea**

## Model 4400 SWIR

*Setting the standard in intelligent hyperspectral imaging*

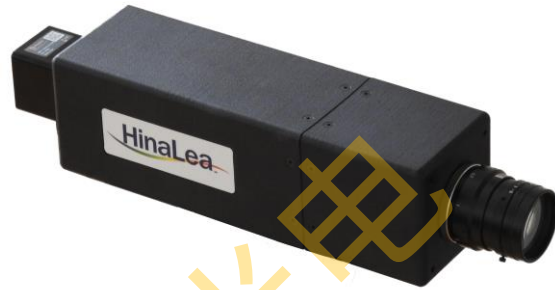

### HIGHLIGHTS

- » High spatial and spectral resolution
- » Real-time imaging and classification
- » SWIR (1000 – 1700 nm)
- » 108 spectral bands
- » 10 nm (FWHM)
- » Sensor Spatial Resolution 640 x 512 pixel

The HinaLea® 4400 system a high speed band-sequential, full-frame, shortwave infrared hyperspectral imager capable of real-time classification . Based on front-staring Fabry-Pérot technology, the 4400 includes the hardware and software required to support a broad range of inspection and aerospace applications. Whether you are working in a fixed or mobile operating environment, the 4400 sets the standard in performance and portability.

The 4400 model utilizes a front-staring approach to hyperspectral imaging that does not require mechanical scanning. The major features and benefits of the 4400 system over push-broom systems include:

- **Image uniformity:** Line-scanning systems rely on constant conditions for optimum performance and are susceptible to subtle environmental changes that can adversely impact image uniformity. Because the 4400 images the entire area of interest at once, it can capture highly uniform images even in dynamic conditions.
- **Application flexibility:** Front-staring systems offer other advantages over line-scanning technologies for environmental monitoring applications, most notably more versatile viewing geometry options. Such systems can not only be mounted statically, but they can also be used by externally in mounted on airborne platforms.
- **Real-time classification:** One of the unique attributes of the 4400 system is its wavelength selectivity which can be dynamically controlled based on the application and object to be imaged. The system allows a range of operational modes from high spectral resolution static image capture with hundreds of bands to near real-time image capture and classification with a few band-passes of interest in a multi-spectral configuration
- **Cost:** HinaLea's systems are designed with mass manufacturability in mind. As such, our systems typically cost a fraction of competitive solutions with similar levels of performance
- **Complete solution:** At HinaLea, our goal is to develop intelligent imaging solutions to customer problems. As such, our systems include application software for not only acquisition but also image exploration and classification. Easy to use tools allow the easy and intuitive application of sophisticated segmentation algorithms that are presented immediately to the user.

## 4400 System Technical Specifications

### HINALEA ADVANTAGES

#### » Staring Hyperspectral Imaging

No mechanical scanning is required, resulting in a lower-cost, reliable system that produces more uniform images.

#### » Off-Sensor Spectral Filtering

Decoupling the spectral filtering from the image sensor means not compromising one for the other and enables both high spatial and spectral resolution.

#### » True Hyperspectral Imaging

Unlike color-filter arrays, with the HinaLea® solution, there is no tradeoff between number of spectral bands and effective spatial resolution.

#### » Customizable

HinaLea will work with strategic partners to optimize camera performance for specific applications and will consider OEM models.

### Mechanical

Dimensions (LxWxH)	354 x 80 x 80 mm
Mass (Weight)	1.6 kg (3.5 lbs.)

### Electrical

Input Voltage	110 VAC at 60Hz / 220 VAC at 50Hz
Data Interfaces	USB, CameraLink


### Environmental

Operating Temperature	20°C ± 10°C
Humidity	65% non-condensing

### Scan Performance

Standard Lens	15° Field of View (FOV) – 150 mm to ∞
Custom Lens	Available on request
Spectral Range	1,000 – 1,700 nm
Spectral Bands	108 nominal, 160 custom
Spectral Resolution	10 nm (FWHM)
Speed of capture	10 hyper cubes per second
Spatial Resolution	640 x 512 pixel
Illumination	Optional

## Application Software

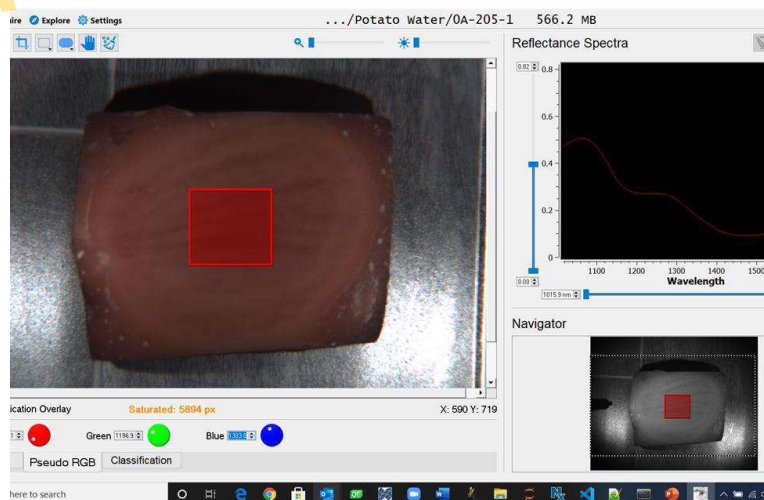

The 4400 system includes proprietary application software featuring fast and easy hyper-cube capture and intuitive image classification/segmentation as part of a suite of powerful spectral image exploration tools.

上海昊量光电设备有限公司

上海市徐汇区虹梅路2007号上海远

中产业园三期6号楼3楼

电话: 15618011391

网站: [www.auniontech.com](http://www.auniontech.com) 有限公司

Phone: 4006-888-532 WeChat: Auniontech Website: [www.auniontech.com](http://www.auniontech.com) E-mail: [info@ auniontech.com](mailto:info@ auniontech.com)

**HinaLea**