




数据参数

	ARTCAM-L512TNIR	ARTCAM-L256TNIR
Sensor Type	InGaAs linear Image Sensor	
Number of effective pixels	512	256
Resolution	512	256
Active Imager Size	12.8(H)x0.025(V)mm	12.8(H)x0.05(V)mm
Scan Mode	Line Scan	
Pixel Size	25(H)x25(V) μ m	50(H)x50(V) μ m
Detected Wavelength	950~1700nm	
scan/sec	8150Hz	14000Hz
Pixel Rate	5MHz	
Sensitivity	0.82 A/W	
Full Well Capacity	2800Ke-	
A/D Resolution	14bit	
Interface	USB3.0 Bulk Transfer	
Synchronization System	Internal Synchronization / External Trigger Synchronization	
Lens Mount	C Mount	
External I/O terminal	HR10A-7R-6S(73) (HIROSE)	
Power	DC12V	
Power Consumption	Under Approx.5W	
Ambient Conditions	Operating Temperature/Humidity : 0~35° C/10~80%(Non condensing) Storage Temperature/Humidity : 0~60° C/10~95%(Non condensing)	
External Dimensions	71.6(W)x61.5(H)x51.5(D)mm *Lens, tripod and cables not included	
Weight	About 237 g	About 237 g

量子效率

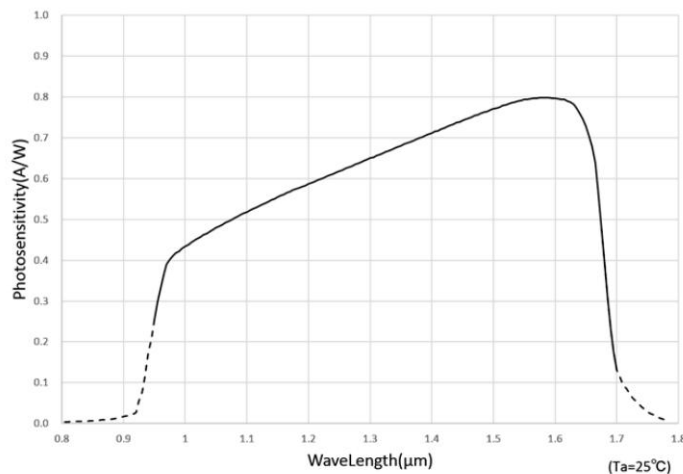


Aunion Tech Co.,Ltd
 Floor 3, Building 6, No. 2007 Hongmei road, Shanghai 201103 P.R. China
 Tel: +86-21-51083793 Fax:+86-21-34241962
 E-Mail: info@auniontech.com Website: www.auniontech.com



数据参数

Items	ARTCAM-L1024DTNIR	ARTCAM-L1024DBTNIR
Sensor Type	G10768-1024D	G10768-1024DB
Model Number	InGaAs Linear image sensor	
Active Pixels	1024	
Active Image Size	25.6(H) × 0.1(V)mm	25.6(H) × 0.025(V)mm
Scanning Mode	Line scan	
Pixel Size	25(H) × 100(V) μm	25(H) × 25(V) μm
Wavelength	900 ~ 1700nm	
Line Rate	≈31.446kHz (max.)	
Data Rate	5MHz	
Saturation Capacity	0.25pC (Standard Value)	
A/D Resolution	14bit	
Interface	USB3.0 Bulk Transfer	
Synchronization Method	Internal Synchronization (Master mode) External Synchronization (trigger mode)	
Lens Mount	F Mount	
External I/O terminal	HR10A-7R-6S(73) (HIROSE)	
Power-supply Voltage	12.0V (±0.5V)	
Power Consumption	Approx. 6W	
Ambient Conditions	Operating Temperature / Humidity: 0 ~ 35° C / 10 ~ 80% (Non-water vapor condensation state) Storage Temperature / Humidity: 0 ~ 60° C / 10 ~ 95% (Non-water vapor condensation state)	
External Dimensions	71.6(W) × 61.5(H) × 109.5(D) mm ※Exclude lens, tripod mount and projections	
Weight	Approx.400g ※Exclude lens, tripod mount and projections	

量子效率

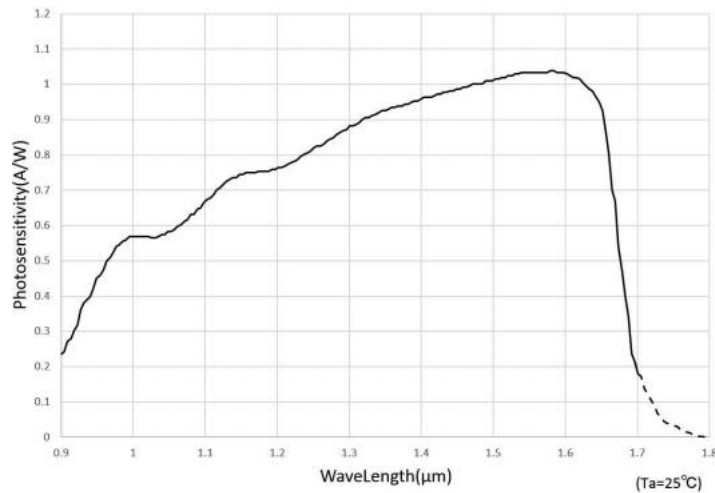

Aunion Tech Co.,Ltd
 Floor 3, Building 6, No. 2007 Hongmei road, Shanghai 201103 P.R. China
 Tel: +86-21-51083793 Fax:+86-21-34241962
 E-Mail: info@auniontech.com Website: www.auniontech.com