



# VALO SF SINGLE-FREQUENCY NIR VECSEL

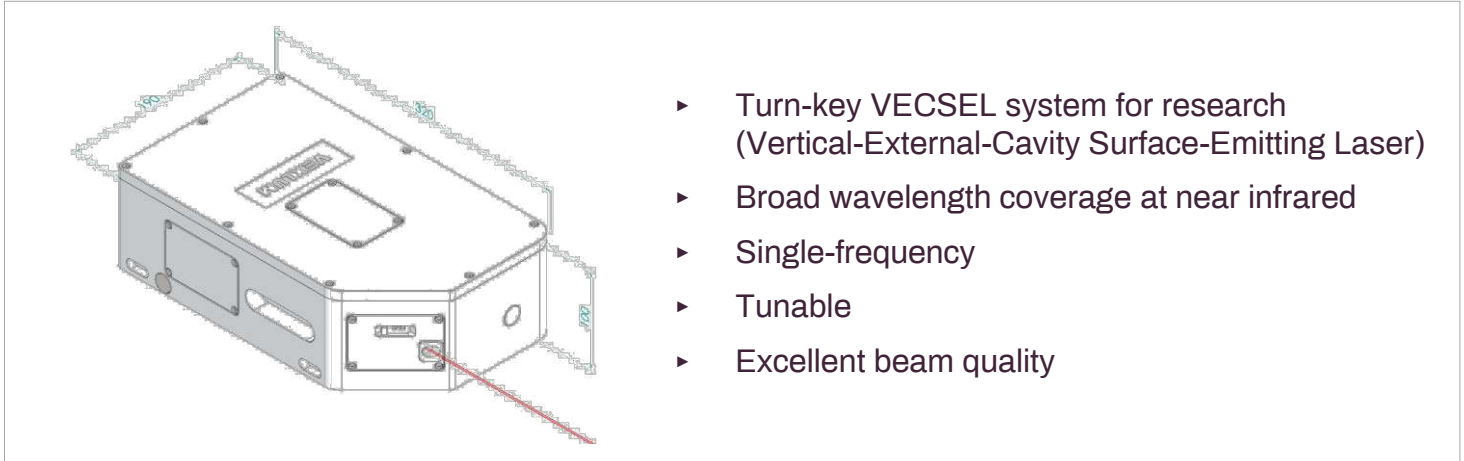

- ▶ Turn-key VECSEL system for research (Vertical-External-Cavity Surface-Emitting Laser)
- ▶ Broad wavelength coverage at near infrared
- ▶ Single-frequency
- ▶ Tunable
- ▶ Excellent beam quality

Center wavelength	700 – 2100 nm
CW power	1–4 W with the integrated pump laser; up to 12 W with external pump laser
Tuning (typical)	Coarse: ~10 THz around the center wavelength Fine: >2 GHz mode-hop free
Locked linewidth	<100 kHz (10 ms)
Beam quality	$M^2 < 1.1$
Frequency locking	Readiness with cavity piezo
VECSEL head size	320 mm x 190 mm x 100 mm (L x W x H)
System includes	VECSEL head with integrated pump laser VALO Control Unit for CW operation, 19"-rack installable Low vibration chiller (water to air heat-exchanger), 19"-rack installable

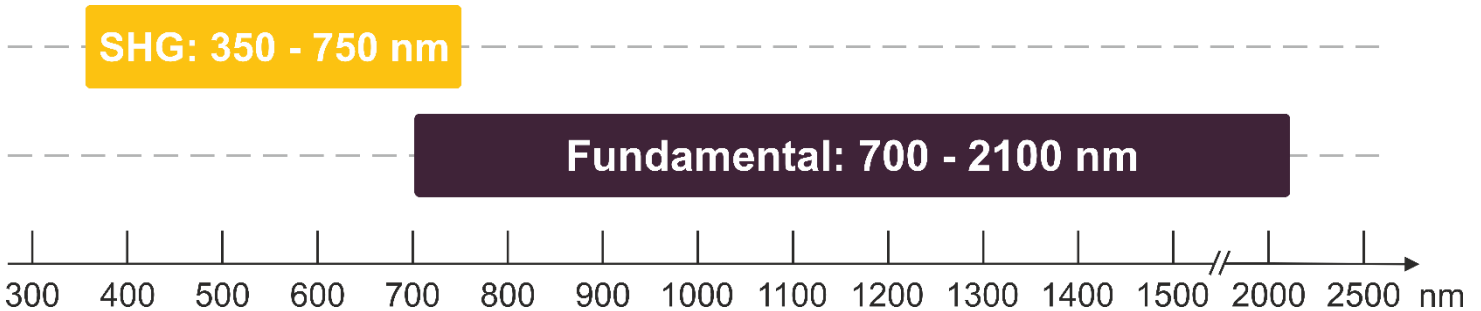

Vexlum Ltd | Korkeakoulunkatu 3 | 33720 Tampere, Finland

Mobile: +358 40 841 7826 | Email: [contact@vexlum.com](mailto:contact@vexlum.com) | [www.vexlum.com](http://www.vexlum.com)

Copyright © 2022 Vexlum. All rights reserved.

上海昊量光电设备有限公司 Phone: 4006-888-532 WeChat: Auniontech Website: [www.auniontech.com](http://www.auniontech.com) E-mail: [info@auniontech.com](mailto:info@auniontech.com)