

# LBX-1064 Diode based laser source

## Optical characteristics \*

**Emission wavelength** 1064 nm ( $\pm 10$  nm tolerance)  
**Linewidth, FWHM**  $\leq 1.2$  nm

Part number	Free space output	Fiber-coupled output	
		Single mode	Multi mode fiber
LBX-1064-200-CSB-(OE/PPA)	200 mW	140 mW	160 mW

**Power stability** over 8 hour, temperature within  $\pm 3^{\circ}\text{C}$   $\pm 2\%$   
**Power adjustment range** 0 to 100%  
**Control modes** Automatic Current Control (ACC)  
**Optical noise** 10 Hz-20 MHz bandwidth  $\leq 0.8\%$  rms

## External modulations Analog Modulation

**Rise / fall time**  $\leq 150$  ns  
**-3dB modulation bandwidth**  $\geq 3$  MHz

## Digital Modulation


**Rise / fall time**  $\leq 2$  ns  
**-3dB modulation bandwidth**  $\geq 150$  MHz

## Transverse singlemode free-space beam

**Beam diameter (typ)** at  $1/e^2$ , 5 cm from the beam aperture 0.9 mm  
**Beam divergence** at  $1/e^2$  full beam, in far field 2.4 mrad  
**Beam quality factor**  $M^2 \leq 1.25$   
**Beam circularity**, in far field  $\geq 90\%$   
**Polarization state** Linear, vertical at  $\pm 0^{\circ}$   
**Polarization**  $\geq 50:1$



## Mechanical drawings

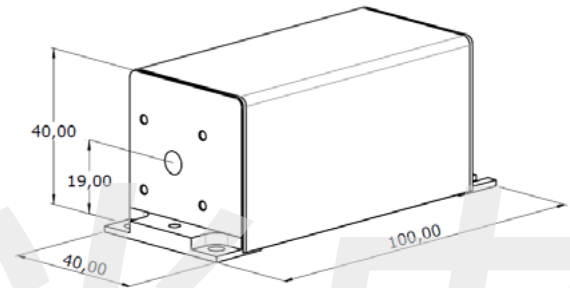

## Plug and Play version provide with:

- ControlBoxx controller
- Manual shutter
- DC power supply

## Available options

- OPT-SHTE-LCX Electro-mechanical shutter
- ACX-HTSK-1 Heat sink for operation in ambient air up to  $38^{\circ}\text{C}$
- ACX-EXK Flange for improved stability
- OPT-CLUP-1064 Clean-up filter

## Fiber coupling options \*\*

	ACX-FCSMUV or ACX-FCPMUV	ACX-FCMM-R50
Power stability over 8 hours and within $\pm 3\text{k}$	$\pm 2.0\%$	$\pm 2.0\%$
Fiber optical characteristics	3.5 $\mu\text{m}$ core diameter 0.11 N.A	50 $\mu\text{m}$ core diameter 0.22 N.A
Polarization extinction ratio (ACX-FCPM only)	$\geq 50:1$	n/a
Fiber output connector	FC/APC	FC/APC
Fiber length	2 m	2 m

Warranty : 12 months from shipment date

\*Specifications at nominal power

\*\* Variant are available on demand

## General specifications

	Plug and Play version	OEM version
Compliance	CE FDA 21 CFR 1040.10/1040.1	FDA 21 CFR 1040.10 / 1040.11
Operating temperature	10 to $38^{\circ}\text{C}$ ambient air with optional heat sink	10 to $50^{\circ}\text{C}$ baseplate
Power consumption	10 W max.	
Storage temperature Humidity	0 to $60^{\circ}\text{C}$ Up to 90%RH, non-condensing	
Supply voltage	100 to 240 VAC external power supply	5 to 12 VDC
Warm-up time	$\leq 2$ minutes	
Interfaces	USB ControlBoxx controller	USB, RS-232, electronic interface



## CONTACT US

Oxxius S.A  
4 rue Louis de Broglie

Phone : +33 296 48 70 28  
sales@oxxius.com

F-22300 Lannion, France www.oxxius.com