

LBX-980

Laser Diode

Optical characteristics *

Emission wavelength	980 nm (± 10 nm tolerance)		
Linewidth, FWHM	≤ 1.2 nm		
Part number	Free space output	Fiber-coupled output	
		Single mode	Multi mode fiber
LBX-980-200-CSB-(OE/PPA)	200 mW	140 mW	160 mW

Power stability over 8 hour, temperature within +/-3°C	$\pm 1\%$
Power adjustment range	0 to 100%
Control modes	Automatic Current Control (ACC)
Optical noise 10 Hz-20 MHz bandwidth	$\leq 0.8\%$ rms

External modulations

Analog Modulation

Rise / fall time ≤ 150 ns

-3dB modulation bandwidth ≥ 3 MHz

Digital Modulation

Rise / fall time ≤ 2 ns

-3dB modulation bandwidth ≥ 150 MHz

Transverse singlemode free-space beam

Beam diameter (typ) at $1/e^2$,
5 cm from the beam aperture 0.9 mm

Beam divergence at $1/e^2$
full beam, in far field 2.3 mrad

Beam quality factor $M^2 \leq 1.25$

Beam circularity, in far field $\geq 90\%$

Polarization state Linear, vertical at $\pm 5^\circ$

Polarization $\geq 50:1$

General specifications

	Plug and Play version	OEM version
Compliance	CE FDA 21 CFR 1040.10/1040.1	FDA 21 CFR 1040.10 / 1040.11
Operating temperature	10 to 38°C ambient air with optional heat sink	10 to 50°C baseplate
Power consumption	2 W / 10 W max.	
Storage temperature Humidity	0 to 60°C Up to 90%RH, non-condensing	
Supply voltage	100 to 240 VAC external power supply	5 to 12 VDC
Warm-up time	≤ 2 minutes	
Interfaces	USB ControlBoxx controller	USB, RS-232, electronic interface




AVOID EXPOSURE TO BEAM

上海昊量光电设备有限公司 Phone: 4006-888-532 WeChat: Auniontech Email: info@uniontech.com

Oxxius operates a continuous improvement programme which can result in specifications being modified without notice.



Mechanical drawings

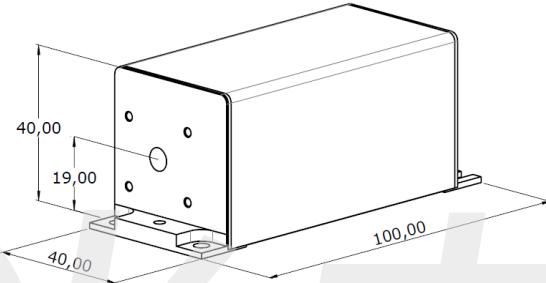

Plug and Play version provide with:

- ControlBoxx controller
- Manual shutter
- DC power supply

Available options

- OPT-SHTE-LCX Electro-mechanical shutter
- ACX-HTSK-1 Heat sink for operation in ambient air up to 38°C
- ACX-EXK Flange for improved stability
- OPT-CLUP-980 Clean-up filter

Fiber coupling options **

	ACX-FCSMUV or ACX-FCPMUV	ACX-FCMM-R50
Power stability over 8 hours and within $\pm 3\%$	$\pm 2.0\%$	$\pm 2.0\%$
Fiber optical characteristics	3.5μm core diameter 0.11 N.A	50μm core diameter 0.22 N.A
Polarization extinction ratio (ACX-FCPM only)	$\geq 50:1$	n/a
Fiber output connector	FC/APC	FC/APC
Fiber length	2 m	2 m

Warranty : 12 months from shipment date

*Specifications at nominal power

** Variant are available on demand

CONTACT US

Oxxius S.A.
4 rue Louis de Broglie
F-22300 Lannion, France

Phone : +33 296 48 70 28
sales@oxxius.com

www.oxxius.com