

## Overview:

The PowerPhotonic Trident Generator is designed to transform a collimated single mode beam into small ring + core at the focus of a focusing lens.

Our Trident Generators are thin glass windows with a precision freeform surface, designed to easily integrate into your existing laser system.

In remote welding, the Trident Generator can be used to control the melt pool, while keeping the keyhole intact. This can lead to a less viscous melt pool, reducing spatter and porosity of the weld.

By upgrading your laser head with a Trident Generator, you can experience the benefits of improved process quality, increased throughput, and reduced operating costs.

## The PowerPhotonic Effect:

**>95%**

Shaping Efficiency


**>10:1**

Extinction Ratio (Gaussian: Ring)


**>100kW**

CW Power Handling Capability

## Output Profiles:

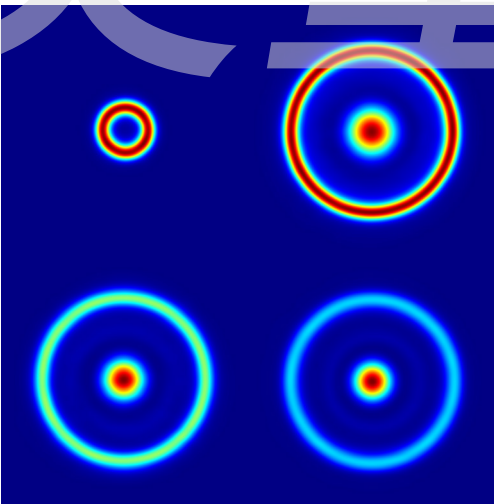

## Optical Layout:

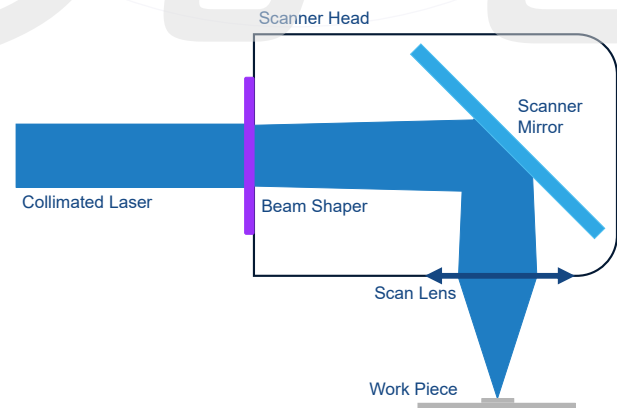

## Key Features:

- Efficient Beam Conversion
- High Power Handling
- Optional Extinction Ratio
- Easy Integration

## Target Applications:

- Remote Welding
- Additive Manufacturing
- Laser Micro Machining
- Ultrafast Material Processing

# Single Mode Trident Generator

## Standard Part:

Part Number	Input Beam Diameter, $1/e^2$ (mm)	Ring Diameter, Peak to Peak ( $\mu\text{m}$ )*	Central Spot : Ring Maximum Intensity	Central Spot Diameter
PP-SM-RNG-1070-AR	5	100	N/A	N/A
PP-SM-TRI-1070-1-AR	5	350	1:1	6.4 x diffraction limit
PP-SM-TRI-1070-2-AR	5	350	2:1	5.5 x diffraction limit
PP-SM-TRI-1070-3-AR	5	350	3:1	5.0 x diffraction limit

\* when a 100mm focal length lens is used. All parts designed for 1070nm

## General Specification:

Parameter	Value
Part Diameter (mm)	25.4 +0/-0.1
Part Thickness (mm)	1.01 +/- 0.01
Part Clear Aperture, Diameter (mm)	15
Coating Reflectance, Per Side (%)	<0.5

## Performance:

Parameter	Value
Ring Diameter (P2P), (%)	$\pm 3$
Max Intensity Ratio, (%)	$\pm 5$
Power in the Bucket <sup>2</sup> , (%)	>95

## Custom Options:

The PowerPhotonic Trident Generator can be readily modified for specific laser systems and applications upon request.

Some of the custom options available include:

Different input beam diameter, different wavelength (in the window between 450nm and 2 $\mu\text{m}$ ), different ring diameter, different intensity ratio, different optic diameter & thickness.

上海昊量光电设备有限公司

Phone: 4006 888 532 WeChat: 18964202046 Website: [www.auniontech.com](http://www.auniontech.com) E-mail: [info@ auniontech.com](mailto:info@ auniontech.com)  
上海昊量光电设备有限公司 Phone: 4006-888-532 WeChat: Auniontech Website: [www.auniontech.com](http://www.auniontech.com) E-mail: [info@ auniontech.com](mailto:info@ auniontech.com)