

LCX-1064S

DPSS

Optical characteristics *

Emission wavelength	1064.6 nm (± 0.6 nm)	
Wavelength stability over 8 hours and $\pm 3^\circ\text{K}$	≤ 1 pm	
Wavelength range	± 0.6 nm	
Linewidth	≤ 1 MHz	
Coherence Length	≥ 100 m	
Output power	Free space	Fiber coupled
	100 mW	70 mW
	200 mW	140 mW
	500 mW	350 mW

Control mode(s) Automatic Power Control (APC)

Power stability
over 8 hours and within $\pm 3\text{k}$ $\pm 1\%$

Power adjustment range
optional with L1C MPA/
AOM

Optical noise
%RMS, 10Hz - 20 MHz bandwidth $\leq 0.2\%$

— Transverse singlemode free-space beam

Beam waist diameter (typ)
at $1/e^2$, 50mm from output aperture 0.7 mm (± 0.1 mm)

Beam divergence
at $1/e^2$, full angle, in far field 2.0 mrad (± 0.5)

Beam quality factor (M^2) ≤ 1.1

Beam circularity,
in far field $\geq 90\%$

Polarization extinction ratio (typ) 1000:1


Polarization state linear, vertical at $\pm 5^\circ$

Fiber coupling option

Specifications	SM and PM Fiber	MM Fiber (50 μm , 0.22 NA)
Coupling Efficiency	$\geq 70\%$	$\geq 80\%$
Polarization Ratio (PMF only)	100 : 1	n/a
Fiber Output Connector	FC-ACPC FC/PC, FCP8 on demand	FC-APC
Power stability over 8 hours and within $\pm 3\text{k}$	$\pm 2\%$	$\pm 2\%$
Fiber length	2.0 m	2.0 m



System specifications

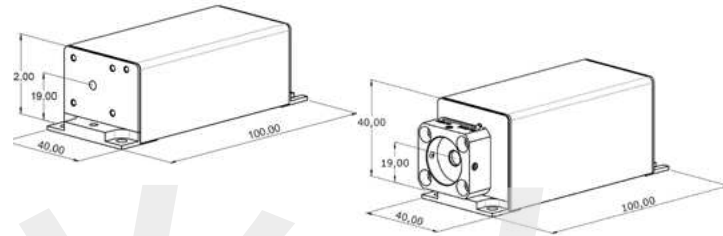

— Plug and Play version provided with :

- Electro-mechanical shutter
- ControlBoxx
- Power supply

Other options

- Heat sink

General specifications

	Plug and Play version	OEM version
Compliance	CE FDA 21 CFR 1040.10/1040.11	FDA 21 CFR 1040.10 / 1040.11
Operating temperature	10 - 38°C ambient air with optional heat sink	10 - 50°C baseplate
Power consumption	≤ 25 W	≤ 20 W
Storage temperature	0 to 60°C	
Supply voltage	100 to 240 VAC external power supply	5 to 12 VDC
Warm-up time	≤ 10 minutes	
Interfaces	USB, RS-232, dedicated electronic interface	

*Specifications at nominal power

Warranty : 18 months from shipment date



CONTACT US

Oxxius S.A
4 rue Louis de Broglie

F-22300 Lannion, France

Phone: 4006-888-532 WeChat: Auniontech E-mail: info@auniontech.com